


Type: \_\_\_\_\_ Qty: \_\_\_\_\_

Project: \_\_\_\_\_



HELIUM LYTE

# SILENTIUM 2

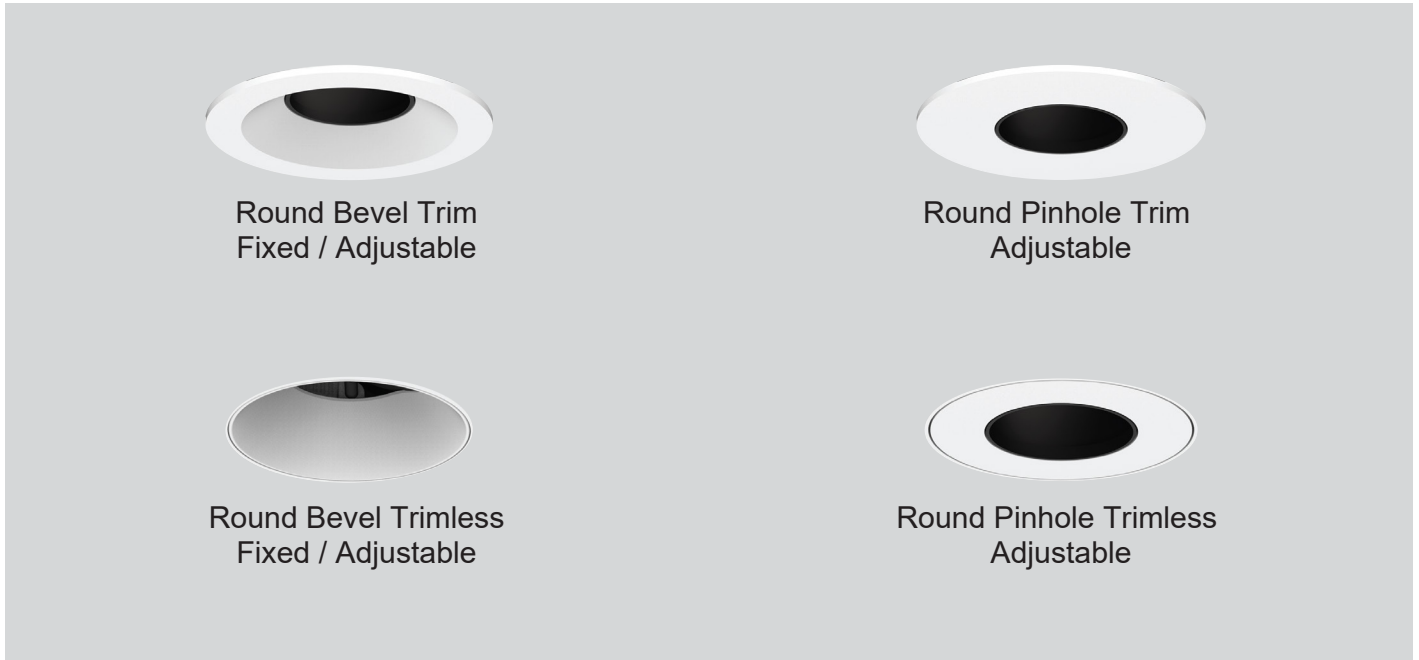

## Design Features:

- Made with high powered BRIDGELUX led chip that maintains high lumens per watt with 90+ CRI.
- Available in TRIAC / 0-10v and DALI dimming.
- Standard remodel installation, new construction housing available.
- LED modules and drivers are easily replaceable.
- IC Rated Housing Available up to 12W.
- Extruded aluminium heat sink ensures optimal heat dissipation and LED life.
- Available with accessories for optics.
- 5 Year warranty.



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

# SILENTIUM 2

Specs Code:

FIXTURE ID <b>1</b>	TRIM OPTION <b>2</b>	TRIM STYLE <b>3</b>	TRIM FINISH <b>4</b>	LUMENS/ WATT <b>5</b>
Silentium 2 <b>SLTM2-RO</b> Round	Trim <b>TR</b>	Fixed <b>FX</b>	White <b>WH</b>	L523 / 07W <b>L52/07W</b>
	Trimless <b>TRL</b>	Adjustable <b>AD</b> Pinhole Adjustable <b>PIN</b>	Black <b>BLK</b>	L913 / 12W <b>L91/12W</b>
LED OPTION <b>6</b>	BEAM ANGLE <b>7</b>	DIMMING <b>8</b>	HOUSING <b>9</b>	VOLTAGE <b>10</b>
2700K <b>27K</b>	15 Degree <b>15D</b>	TRIAC <b>TRIAC</b>	New Construction <b>NC</b>	120V <b>120V</b>
3000K <b>30K</b>	24 Degree <b>24D</b>	0-10V <b>DMV</b>	IC Rated Housing <b>IC</b>	120-277V <b>UNV</b>
3500K <b>35K</b>	36 Degree <b>36D</b>	DALI <b>DALI</b>	Remodel <b>RMOD</b>	
4000K <b>40K</b>	50 Degree <b>50D</b>			
Dim To Warm <b>DTW</b>				

Order Guide:

<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>
<input style="width: 100px; height: 30px;" type="text"/>	<input style="width: 100px; height: 30px;" type="text"/>	<input style="width: 100px; height: 30px;" type="text"/>	<input style="width: 100px; height: 30px;" type="text"/>	<input style="width: 100px; height: 30px;" type="text"/>	<input style="width: 100px; height: 30px;" type="text"/>
<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>		
<input style="width: 100px; height: 30px;" type="text"/>	<input style="width: 100px; height: 30px;" type="text"/>	<input style="width: 100px; height: 30px;" type="text"/>	<input style="width: 100px; height: 30px;" type="text"/>		

\*Example : SLTM2-RO-TR-FX-BLK-L52/07W-40K-50D-TRIAC-NC-UNV

Accessories :

	Solite Lens <b>[SL]</b>	Frosted Lens <b>[FR]</b>	Hex Louver <b>[HL]</b>
<b>OPTICS</b>	<input style="width: 100px; height: 20px;" type="text"/>	<input style="width: 100px; height: 20px;" type="text"/>	<input style="width: 100px; height: 20px;" type="text"/>







# SILENTIUM 2

## Product Details:


### Round Bevel Trim Fixed

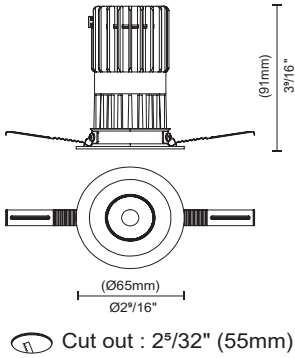


### Round Bevel Trim Adjustable

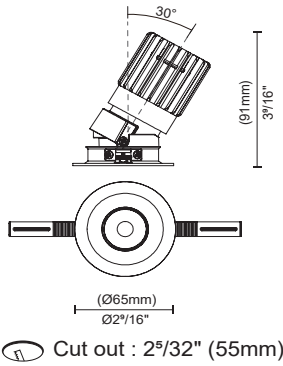


### Round Pinhole Trim Adjustable

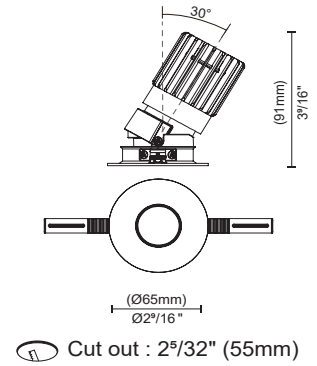


### Round Bevel Trimless Fixed

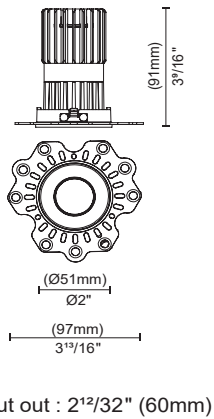


### Round Bevel Trimless Adjustable

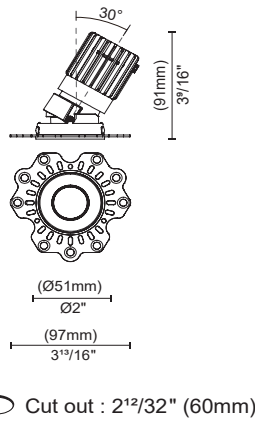


### Round Pinhole Trimless Adjustable

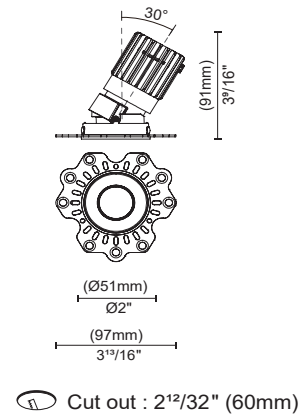

## New Construction Plate for Trim / Trimless

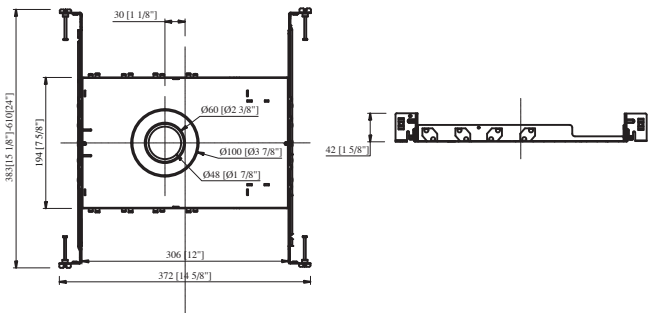





## IC Box For Upto 12W

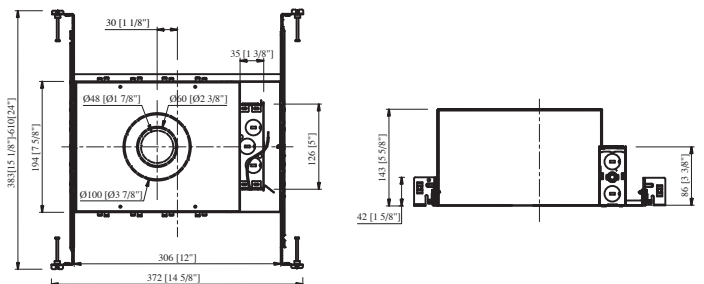



# SILENTIUM 2

## Mounting Details:

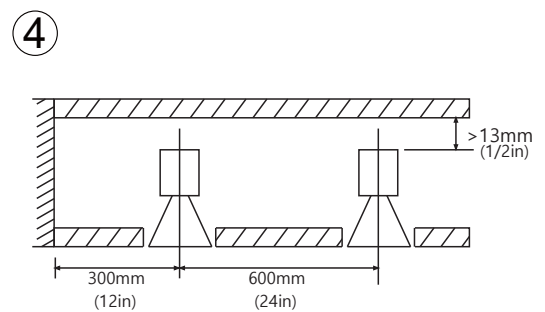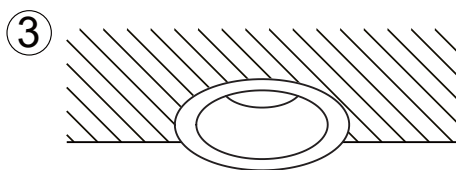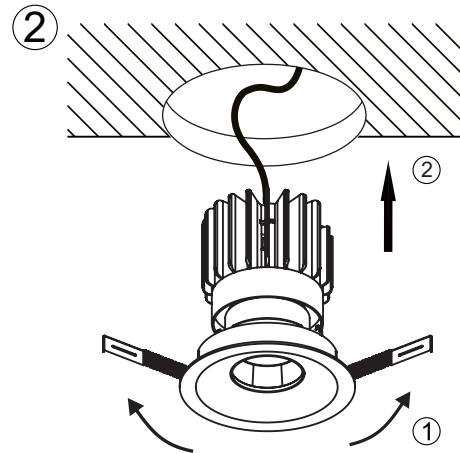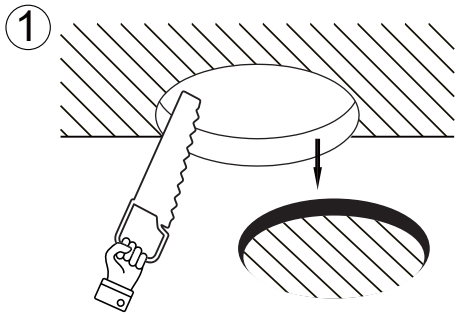

Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek


# SILENTIUM 2

## Photometric:

### Round Fixed -12W-24D

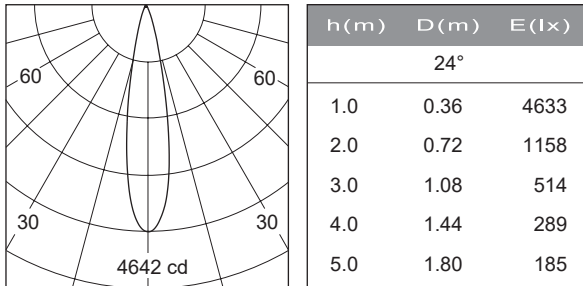

### Round Adjustable -12W-24D

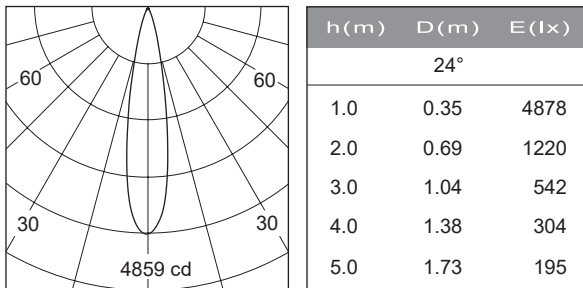

## Lighting Chart:


WATT	LUMENS	CCT	CRI
07W	523 lm	3000K	CRI90
12W	913 lm	3000K	CRI90





# SILENTIUM 2

## Driver Details:

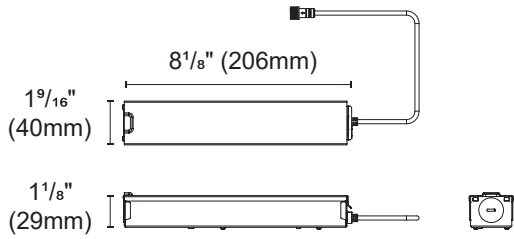

Internal space dimension:  
 L  $4\frac{1}{4}''$  (108mm) X W  $1\frac{3}{8}''$  (35mm) X H 1" (26mm)

28B-PUP10A-1WMC-350	0/1-10V
28B-PUP10D-1WMC-350	DALI
28B-PUP10T-1LMC-350	TRIAC



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek



# SILENTIUM 2

## Technical Details:

Material	Aluminium
Trim Options	Trim / Trimless
Trim Style	Fixed / Adjustable / Pinhole Adjustable
Trim Finish	White / Black
Lumens	Upto 913lm Non IC And IC Rated
Wattage	07W / 12W
Efficacy	76 Lm/W
UGR	<16
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K / DTW
Beam Angle	15° / 24° / 36° / 50°
Dimming	TRIAC / 0-10V / DALI
Voltage	120V / 120-277V
Life expectancy	LM 80 > 66,000 Hrs. / LM 70 > 66,000 Hrs.
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Housing	Non IC Rated / IC Rated / Remodel
Certification	ETL LISTED / DAMP RATED



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek