

Type:\_\_\_\_\_ Qty:\_\_\_\_\_

Project:\_\_\_\_\_



HELIUM LYTE

# SILENTIUM 1 MULTI WALL WASH



Round Wall Wash Fixed - Two Light

## Design Features:

---

- Made with high powered BRIDGELUX led chip that maintains high lumens per watt with 90+ CRI.
- Available in TRIAC / 0-10v and DALI dimming.
- Standard remodel installation, new construction housing available.
- LED modules and drivers are easily replaceable.
- IC Rated Housing Available up to 10W.
- Extruded aluminium heat sink ensures optimal heat dissipation and LED life.
- 5 Year warranty.



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

# SILENTIUM 1 MULTI WALL WASH

Specs Code:

| FIXTURE ID <b>1</b>                                                             | TRIM OPTION <b>2</b>                    | MOUNTING <b>3</b>                                                                                      | TRIM STYLE <b>4</b> | TRIM FINISH <b>5</b>                                       |
|---------------------------------------------------------------------------------|-----------------------------------------|--------------------------------------------------------------------------------------------------------|---------------------|------------------------------------------------------------|
| Silentium 1 Multi Wall Wash<br><b>SLTM1-ML-WW</b>                               | Trim <b>TRM</b>                         | Drywall <b>DW</b><br>Millwork <b>MW</b>                                                                | Fixed <b>FX</b>     | White <b>WH</b><br>Black <b>BLK</b>                        |
| NO. OF LIGHT <b>6</b>                                                           | LUMENS/ WATT <b>7</b>                   | LED OPTION <b>8</b>                                                                                    | BEAM ANGLE <b>9</b> | DIMMING <b>10</b>                                          |
| Two Light <b>2L</b>                                                             | L398 -795 / 10W <b>LXX/10W*</b>         | 2700K <b>27K</b><br>3000K <b>30K</b><br>3500K <b>35K</b><br>4000K <b>40K</b><br>Dim To Warm <b>DTW</b> | Wall Wash <b>WW</b> | TRIAC <b>TRIAC</b><br>0-10V <b>DMV</b><br>DALI <b>DALI</b> |
| HOUSING <b>11</b>                                                               | VOLTAGE <b>12</b>                       |                                                                                                        |                     |                                                            |
| New Construction <b>NC</b><br>IC Rated Housing <b>IC</b><br>Remodel <b>RMOD</b> | 120V <b>120V</b><br>120-277V <b>UNV</b> |                                                                                                        |                     |                                                            |

\* Please Refer The Lighting Chart For Lumens Per Light.

Order Guide:

|                      |                      |                      |                      |                      |                      |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| <b>1</b>             | <b>2</b>             | <b>3</b>             | <b>4</b>             | <b>5</b>             | <b>6</b>             |
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |
| <b>7</b>             | <b>8</b>             | <b>9</b>             | <b>10</b>            | <b>11</b>            | <b>12</b>            |
| <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> | <input type="text"/> |

\*Example : SLTM1-WW-TR-DW-FX-BLK-2L-LXX/10W-40K-WW-TRIAC-NC-UNV



Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek

# SILENTIUM 1 MULTI WALL WASH


## Product Details:

### Round Wall Wash Fixed - Two Light




 Cut out : 2<sup>13</sup>/<sub>32</sub>"x4<sup>3</sup>/<sub>4</sub>" (61x121mm)

### New construction plate for all Trim / Trimless Two & Three Light



### IC Box for all Trim / Trimless Two Light

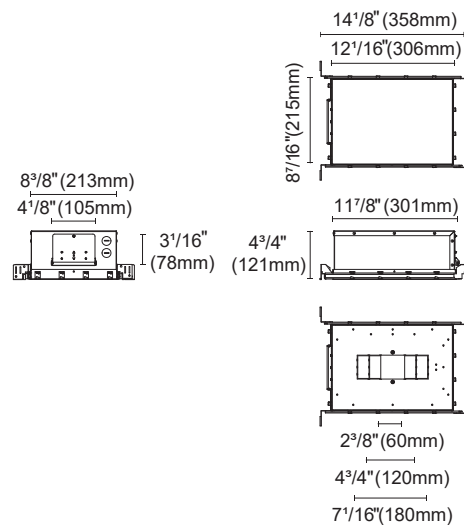

Warranty



DAMP Rated



TRIAC



Dimming







DALI



Intertek

# SILENTIUM 1 MULTI WALL WASH


## Mounting Details:

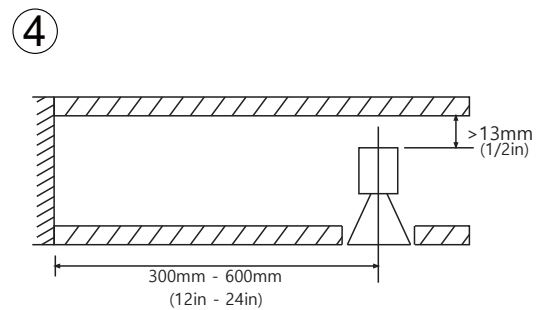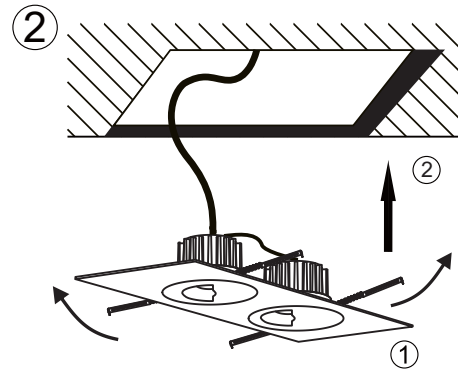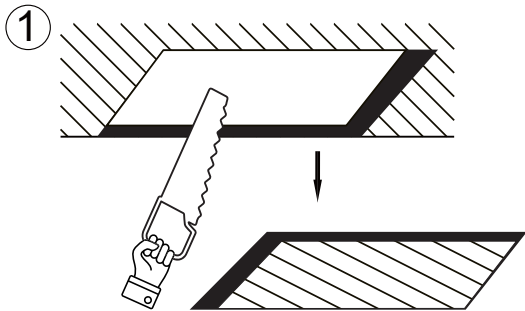

# SILENTIUM 1 MULTI WALL WASH

## Photometric:

### Round Fixed -10W-Wall Wash



| h(m)     | D(m) | E(lx) |
|----------|------|-------|
| Wallwash |      |       |
| 1.0      | 0.48 | 861   |
| 2.0      | 0.96 | 215   |
| 3.0      | 1.45 | 95    |
| 4.0      | 1.93 | 53    |
| 5.0      | 2.41 | 34    |

## Lighting Chart:

### Round Fixed Trim

| WATT    | NON IC     | IC         | CCT   | CRI   |
|---------|------------|------------|-------|-------|
|         | LUMENS     | LUMENS     |       |       |
| 2 X 10W | 2 X 398 lm | 2 x 795 lm | 3000K | CRI90 |



# SILENTIUM 1 MULTI WALL WASH

## Remote Driver Details:


PWM 5 in 1 Dimmable LED driver



### HL-040-DW

Triac / 0-10V/1-10V/Potentiometer/10V  
Multi-current output series 40W  
For 1~3T


Gear Box

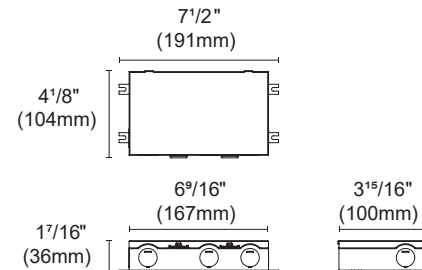


### HL-040-DWJ

Triac/Phase, 0-10V, 1-10V, Potentiometer  
10V PWM 5 in 1 dimming  
40W 1~3T

## Installation For Non-IC

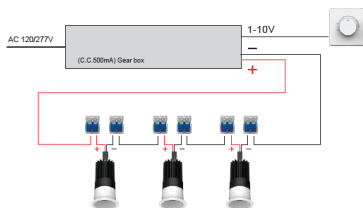

## Installation For IC Box



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

# SILENTIUM 1 MULTI WALL WASH

## Technical Details:

|                 |                                           |
|-----------------|-------------------------------------------|
| Material        | Aluminium                                 |
| Trim Options    | Trim / Trimless                           |
| Trim Style      | Fixed                                     |
| Trim Finish     | White / Black                             |
| Lumens          | Upto 398lm Non IC And 795lm IC Rated      |
| Wattage         | 10W                                       |
| No. Of Lights   | 2 Light                                   |
| Efficacy        | 40 Lm/W                                   |
| UGR             | <16                                       |
| CRI             | 90+                                       |
| CCT             | 2700K / 3000K / 3500K / 4000K / DTW       |
| Beam Angle      | Wall Wash                                 |
| Dimming         | TRIAC / 0-10V / DALI                      |
| Voltage         | 120V / 120-277V                           |
| Life expectancy | LM 80 > 66,000 Hrs. / LM 70 > 66,000 Hrs. |
| Operating Temp. | -20°C ~ 40°C (-4°F ~ 104°F)               |
| Housing         | Non IC Rated / IC Rated / Remodel         |
| Certification   | ETL LISTED / DAMP RATED                   |



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek