


Type:\_\_\_\_\_ Qty:\_\_\_\_\_

Project:\_\_\_\_\_



HELIUM LYTE

# SILENTIUM 1 MULTI WALL WASH

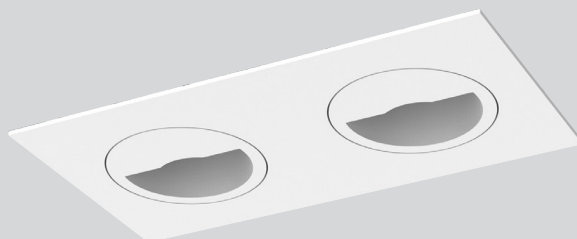

Round Wall Wash Fixed - Two Light

## Design Features:

- Made with high powered BRIDGELUX led chip that maintains high lumens per watt with 90+ CRI.
- Available in TRIAC / 0-10v and DALI dimming.
- Standard remodel installation, new construction housing available.
- LED modules and drivers are easily replaceable.
- IC Rated Housing Available up to 10W.
- Extruded aluminium heat sink ensures optimal heat dissipation and LED life.
- 5 Year warranty.



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

# SILENTIUM 1 MULTI WALL WASH

Specs Code:

FIXTURE ID <b>1</b>	TRIM OPTION <b>2</b>	TRIM STYLE <b>3</b>	TRIM FINISH <b>4</b>	NO. OF LIGHT <b>5</b>
Silentium 1 Multi Wall Wash <b>SLTM1-ML-WW</b>	Trim <b>TRM</b>	Fixed <b>FX</b>	White Black <b>WH</b> <b>BLK</b>	Two Light <b>2L</b>
LUMENS/ WATT <b>6</b>	LED OPTION <b>7</b>	BEAM ANGLE <b>8</b>	DIMMING <b>9</b>	HOUSING <b>10</b>
L398 -795 / 10W <b>LXX/10W*</b>	2700K 3000K 3500K 4000K Dim To Warm <b>27K</b> <b>30K</b> <b>35K</b> <b>40K</b> <b>DTW</b>	Wall Wash <b>WW</b>	TRIAC 0-10V DALI <b>TRIAC</b> <b>DMV</b> <b>DALI</b>	New Construction IC Rated Housing <b>NC</b> <b>IC</b>
VOLTAGE <b>11</b>				
120V 120-277V <b>120V</b> <b>UNV</b>				

\* Please Refer The Lighting Chart For Lumens Per Light.

Order Guide:

<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>	<b>11</b>	
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	

\*Example : SLTM1-WW-TRM-FX-BLK-2L-LXX/10W-40K-WW-TRIAC-NC-UNV



Warranty



DAMP Rated



TRIAC



Dimming



DALI





Intertek

# SILENTIUM 1 MULTI WALL WASH


## Product Details:

### Round Wall Wash Fixed - Two Light

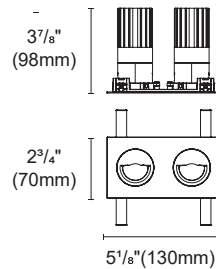


 Cut out :  $2\frac{13}{32}" \times 4\frac{3}{4}"$  (61x121mm)

### New construction plate for all Trim / Trimless Two & Three Light

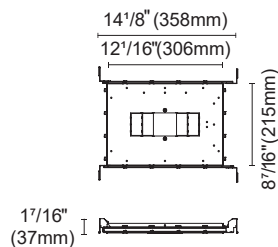

### IC Box for all Trim / Trimless Two Light

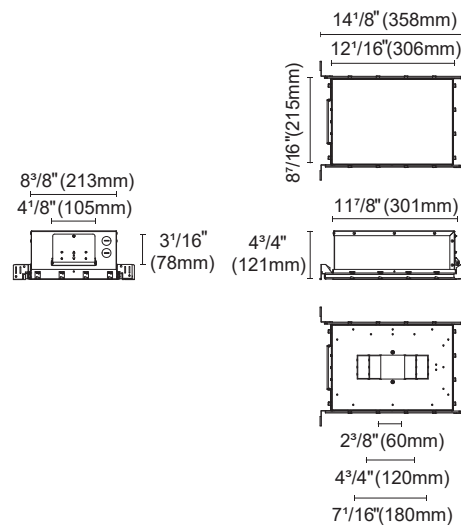

Warranty



DAMP Rated



TRIAC



Dimming







DALI



Intertek

# SILENTIUM 1 MULTI WALL WASH

## Mounting Details:

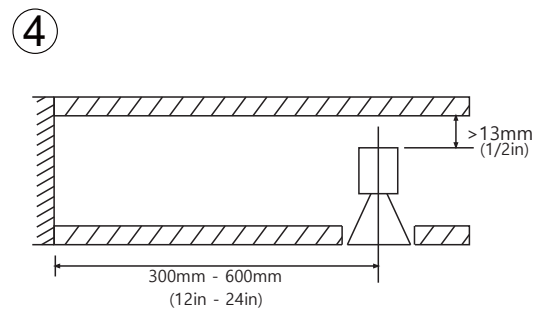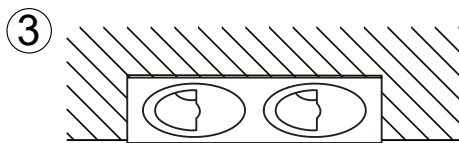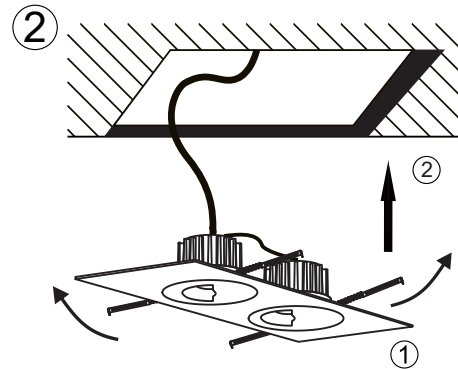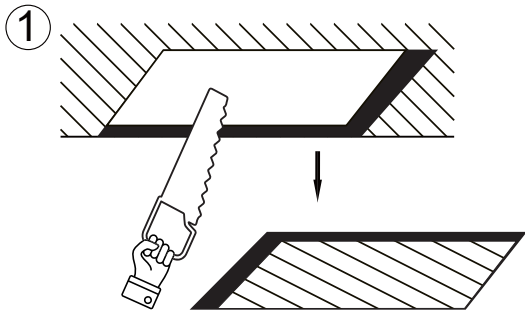

Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek

# SILENTIUM 1 MULTI WALL WASH

## Photometric:

### Round Fixed -10W-Wall Wash

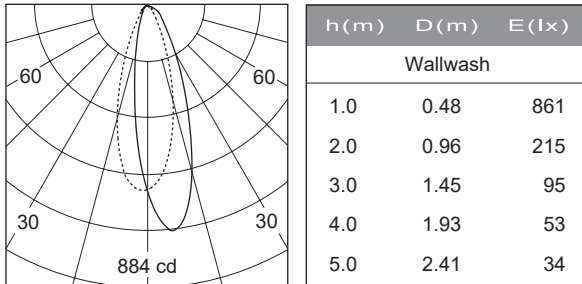

## Lighting Chart:

### Round Fixed Trim

WATT	NON IC	IC	CCT	CRI
	LUMENS	LUMENS		
2 X 10W	2 X 398 lm	2 x 795 lm	3000K	CRI90



# SILENTIUM 1 MULTI WALL WASH

## Remote Driver Details:


PWM 5 in 1 Dimmable LED driver



### HL-040-DW

Triac / 0-10V/1-10V/Potentiometer/10V  
Multi-current output series 40W  
For 1~3T


Gear Box

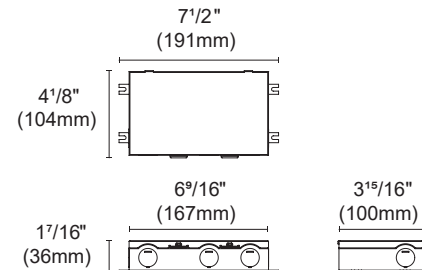


### HL-040-DWJ

Triac/Phase, 0-10V, 1-10V, Potentiometer  
10V PWM 5 in 1 dimming  
40W 1~3T

## Installation For Non-IC

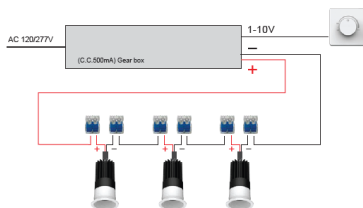

## Installation For IC Box

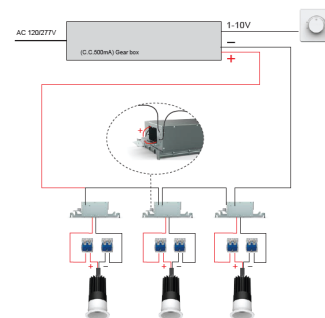

Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

# SILENTIUM 1 MULTI WALL WASH

## Technical Details:

Material	Aluminium
Trim Options	Trim / Trimless
Trim Style	Fixed
Trim Finish	White / Black
Lumens	Upto 398lm Non IC And 795lm IC Rated
Wattage	10W
No. Of Lights	2 Light
Efficacy	40 Lm/W
UGR	<16
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K / DTW
Beam Angle	Wall Wash
Dimming	TRIAC / 0-10V / DALI
Voltage	120V / 120-277V
Housing	Non IC Rated / IC Rated
Certification	ETL LISTED / DAMP RATED



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek