

Type: _____ Qty: _____

Project: _____



HELIUM LYTE

SILENTIUM 1 WALL WASH



Round Wall Wash
Trim Fixed



Round Wall Wash
Trimless Fixed



Square Wall Wash
Trim Fixed



Square Wall Wash
Trimless Fixed

Design Features:

- Made with high powered BRIDGELUX led chip that maintains high lumens per watt with 90+ CRI.
- Available in TRIAC / 0-10v and DALI dimming.
- Standard remodel installation, new construction housing available.
- LED modules and drivers are easily replaceable.
- IC Rated Housing Available up to 10W.
- Extruded aluminium heat sink ensures optimal heat dissipation and LED life.
- 5 Year warranty.



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

SILENTIUM 1 WALL WASH

Specs Code:

| FIXTURE ID 1 | TRIM OPTION 2 | MOUNTING 3 | TRIM STYLE 4 | TRIM FINISH 5 |
|--|--|---------------------|--|---|
| Silentium 1 Wall Wash Round SLTM1-WW-RO | Trim TR Trimless TRL | Drywall DW | Fixed FX | White WH Black BLK |
| Silentium 1 Wall Wash Square SLTM1-WW-SQ | | | | |
| LUMENS/ WATT 6 | LED OPTION 7 | BEAM ANGLE 8 | DIMMING 9 | HOUSING 10 |
| L398 / 10W L39/10W | 2700K 27K 3000K 30K 3500K 35K 4000K 40K Dim To Warm DTW | Wall Wash WW | TRIAC TRIAC 0-10V DMV DALI DALI | New Construction NC IC Rated Housing IC Remodel RMOD |
| VOLTAGE 11 | | | | |
| 120V 120V 120-277V UNV | | | | |

Order Guide:

| | | | | | |
|----------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| 1 | 2 | 3 | 4 | 5 | 6 |
| <input type="text"/> |
| 7 | 8 | 9 | 10 | 11 | |
| <input type="text"/> | |

*Example : SLTM1-WW-RO-TR-DW-FX-BLK-L39/10W-40K-WW-TRIAC-NC-UNV



Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek



SILENTIUM 1 WALL WASH



Product Details:

Round Wall Wash Trim Fixed





 Cut out : 1 26/32" (46mm)

Round Wall Wash Trimless Fixed





Square Wall Wash Trim Fixed



 Cut out : 1 26/32" X 1 26/32" (46X46mm)

Square Wall Wash Trimless Fixed



 Cut out : 1 31/32" X 1 31/32" (50X50mm)






SILENTIUM 1 WALL WASH


Product Details:

Round Wall Wash

New Construction Plate for Trim / Trimless




IC Box For Upto 10W

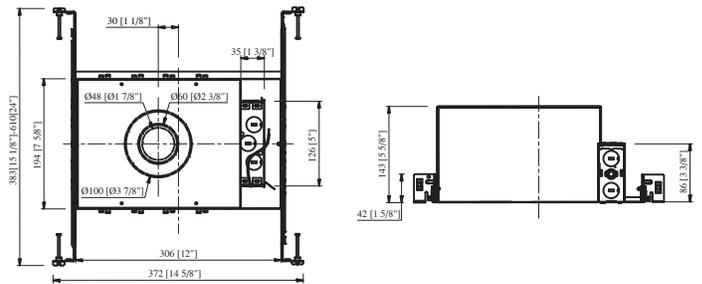


Square Wall Wash

New Construction Plate for Trim / Trimless

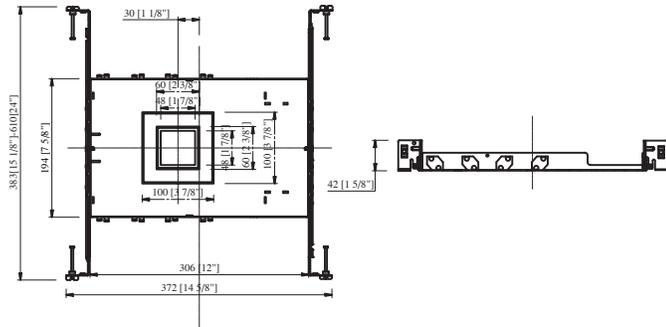

IC Box For Upto 10W

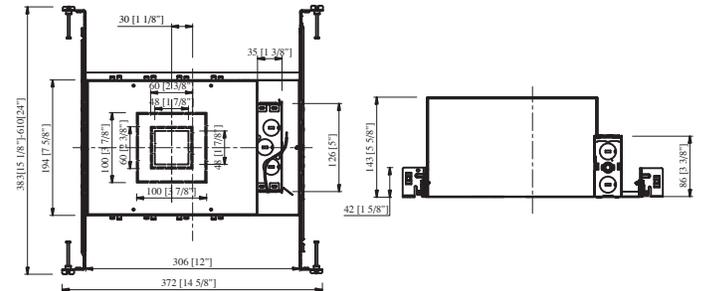

Warranty



DAMP Rated



TRIAC



Dimming







DALI



Intertek

SILENTIUM 1 WALL WASH

Mounting Details:

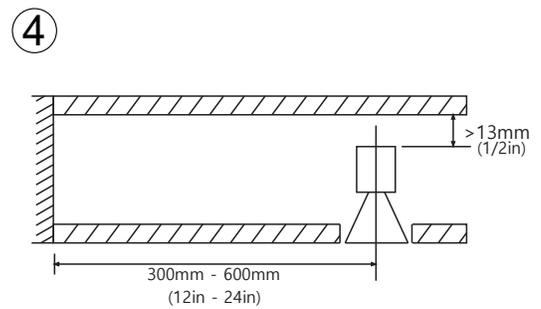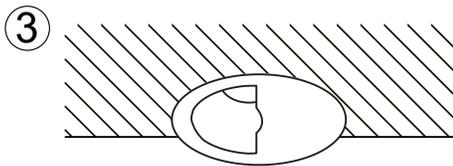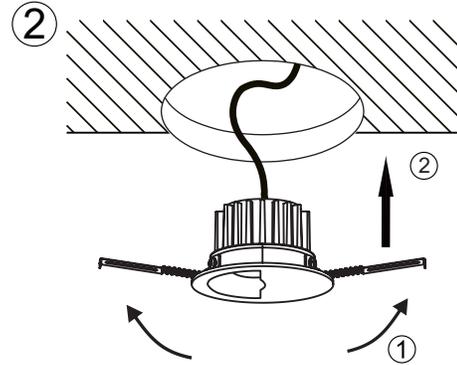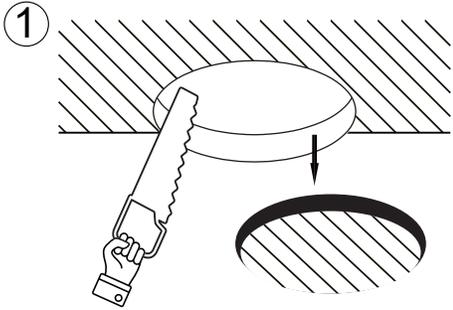

Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek

SILENTIUM 1 WALL WASH


Photometric:

Round Adjustable -10W-Wall Wash



| h (m) | D (m) | E (lx) |
|----------|-------|--------|
| Wallwash | | |
| 1.0 | 0.48 | 861 |
| 2.0 | 0.96 | 215 |
| 3.0 | 1.45 | 95 |
| 4.0 | 1.93 | 53 |
| 5.0 | 2.41 | 34 |

Square Adjustable -10W-Wall Wash



| h (m) | D (m) | E (lx) |
|----------|-------|--------|
| Wallwash | | |
| 1.0 | 0.48 | 861 |
| 2.0 | 0.96 | 215 |
| 3.0 | 1.45 | 95 |
| 4.0 | 1.93 | 53 |
| 5.0 | 2.41 | 34 |

Lighting Chart:

| WATT | LUMENS | CCT | CRI |
|------|--------|-------|-------|
| 10W | 398 lm | 3000K | CRI90 |



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek



SILENTIUM 1 WALL WASH

Remote Driver Details:


PWM 5 in 1 Dimmable LED driver



HL-040-DW

Triac / 0-10V/1-10V/Potentiometer/10V
Multi-current output series 40W
For 1~3T


Gear Box

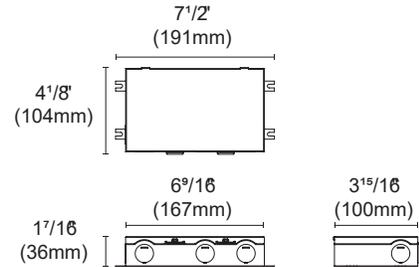


HL-040-DWJ

Triac/Phase , 0-10V , 1-10V , Potentiometer
10V PWM 5 in 1 dimming
40W 1~3T

Installation For Non-IC

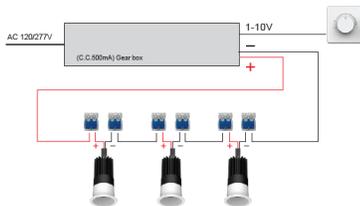

Installation For IC Box





SILENTIUM 1 WALL WASH

Technical Details:

| | |
|-----------------|---|
| Material | Aluminium |
| Trim Options | Trim / Trimless |
| Trim Style | Fixed |
| Trim Finish | White / Black |
| Lumens | Upto 398lm Non IC And IC Rated |
| Wattage | 10W |
| Efficacy | 39 Lm/W |
| UGR | <16 |
| CRI | 90+ |
| CCT | 2700K / 3000K / 3500K / 4000K / DTW |
| Beam Angle | Wall Wash |
| Dimming | TRIAC / 0-10V / DALI |
| Voltage | 120V / 120-277V |
| Life expectancy | LM 80 > 66,000 Hrs. / LM 70 > 66,000 Hrs. |
| Operating Temp. | -20°C ~ 40°C (-4°F ~ 104°F) |
| Housing | Non IC Rated / IC Rated / Remodel |
| Certification | ETL LISTED / DAMP RATED |



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek