

Type:_____ Qty:_____

Project:_____




HELIUM LYTE

SILENTIUM 3



Square Bevel Trim
Fixed



Square Bevel Trimless
Fixed



Square Bevel Trim
Adjustable



Square Bevel Trimless
Adjustable

Design Features:

- Made with high powered BRIDGELUX led chip that maintains high lumens per watt with 90+ CRI.
- Available in TRIAC / 0-10v and DALI dimming.
- Standard remodel installation, new construction housing available.
- LED modules and drivers are easily replaceable.
- IC Rated Housing Available up to 18W.
- Extruded aluminium heat sink ensures optimal heat dissipation and LED life.
- Available with accessories for optics.
- 5 Year warranty.



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

SILENTIUM 3

Specs Code:

FIXTURE ID 1	TRIM OPTION 2	TRIM STYLE 3	TRIM FINISH 4	LUMENS/ WATT 5
Silentium 3 SLTM3-SQ Square	Trim TRM	Fixed FX	White WH	L1216 / 18W L12/18W
	Trimless TRML	Adjustable AD	Black BLK	L1357 / 20W L13/20W
LED OPTION 6	BEAM ANGLE 7	DIMMING 8	HOUSING 9	VOLTAGE 10
2700K 27K	25 Degree 25D	TRIAC TRIAC	New Construction NC	120V 120V
3000K 30K	35 Degree 35D	0-10V DMV	IC Rated Housing IC	120-277V UNV
3500K 35K	45 Degree 45D	DALI DALI		
4000K 40K	55 Degree 55D			
Dim To Warm DTW				

Order Guide:

1	2	3	4	5	6
7	8	9	10		

*Example : SLTM3-SQ-TRM-FX-BLK-L12/18W-40K-50D-TRIAC-NC-UNV

Accessories :


	Solite Lense [SL]	Frosted Lense [FR]	Hex Louver [HL]
OPTICS			




SILENTIUM 3

Product Details:


Square Bevel Trim Fixed

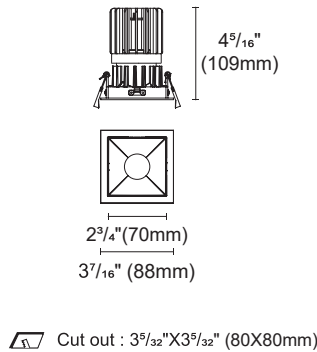


Square Bevel Trim Adjustable

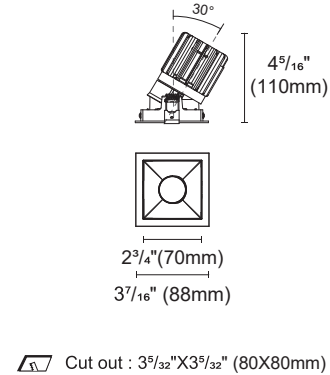


Square Bevel Trimless Fixed

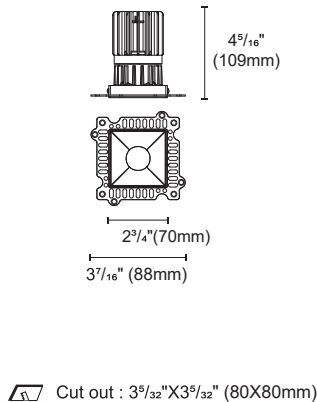


Square Bevel Trimless Adjustable

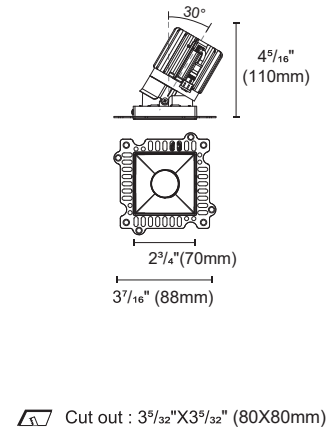

New Construction Plate for Trim / Trimless




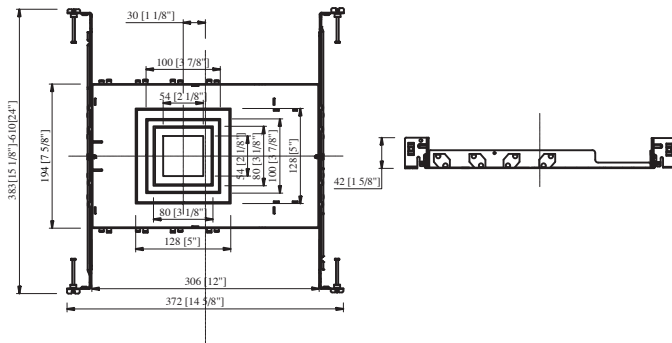


IC Box For Up to 18W

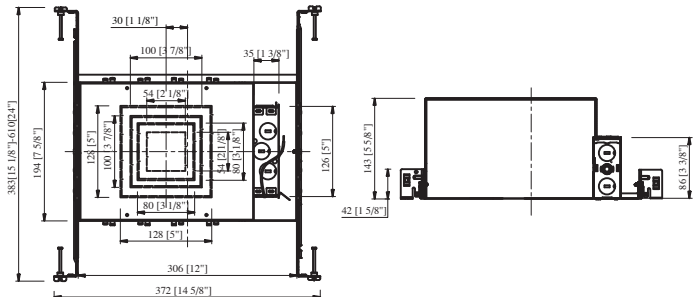

SILENTIUM 3


Mounting Details:

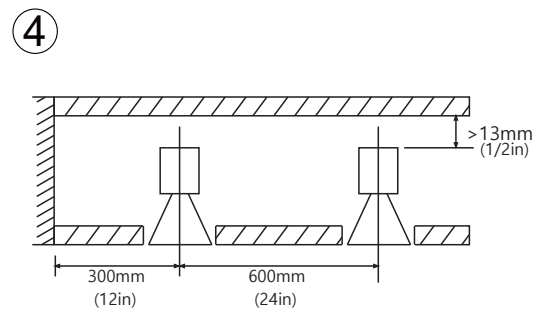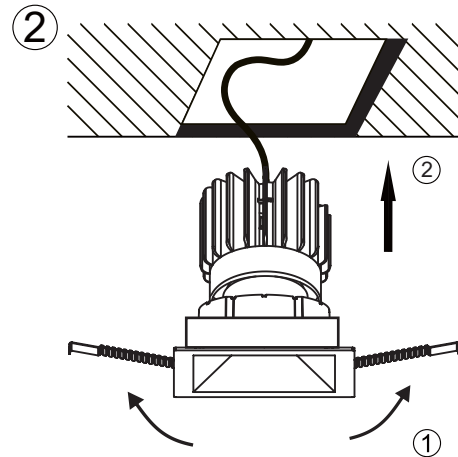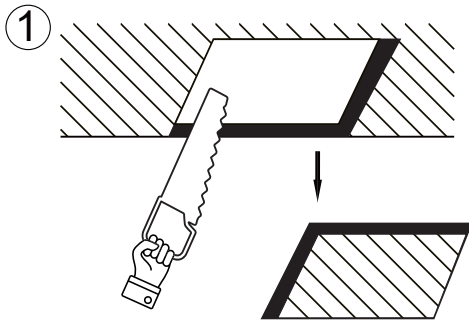


SILENTIUM 3

Photometric:

Square Fixed -20W-25D

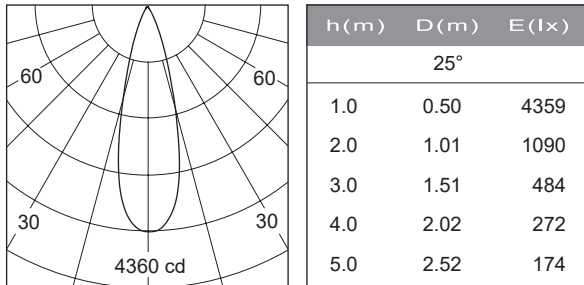

Square Adjustable -20W-35D

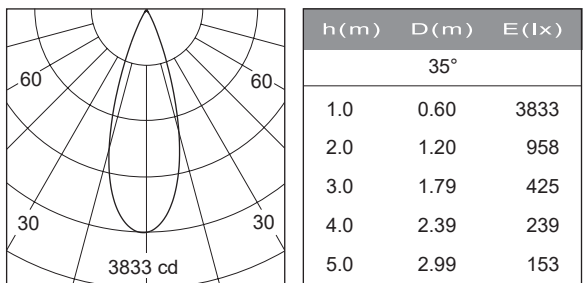

Lighting Chart:


WATT	LUMENS	CCT	CRI
18W	1216 lm	3000K	CRI90
20W	1357 lm	3000K	CRI90





SILENTIUM 3

Driver Details:

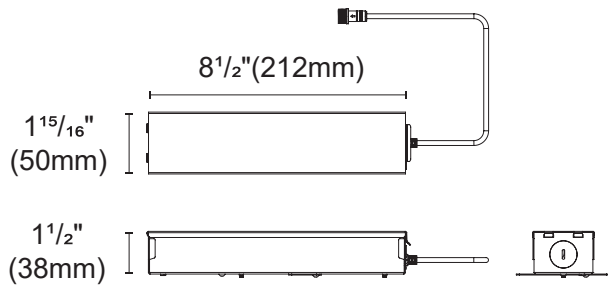

Internal space dimension:

L $8\frac{1}{4}"$ (209mm) X W $1\frac{7}{8}"$ (48mm) X H $1\frac{5}{16}"$ (33mm)

22B-PUP20A-1WMC

0/1-10V

22B-PUP20D-1WMC

DALI

22B-PUP20T-1LMC

TRIAC



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

SILENTIUM 3

Technical Details:

Material	Aluminium
Trim Options	Trim / Trimless
Trim Style	Fixed / Adjustable
Trim Finish	White / Black
Lumens	Upto 1357lm Non IC And 1216lm IC Rated
Wattage	18W / 20W
Efficacy	68 Lm/W
UGR	<16
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K / DTW
Beam Angle	25° / 35° / 45° / 55°
Dimming	TRIAC / 0-10V / DALI
Voltage	120V / 120-277V
Housing	Non IC Rated / IC Rated
Certification	ETL LISTED / DAMP RATED



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek