

Type:_____ Qty:_____

Project:_____



HELIUM LYTE

SILENTIUM 3 WALL WASH



Round Wall Wash
Trim Fixed



Round Wall Wash
Trimless Fixed



Square Wall Wash
Trim Fixed



Square Wall Wash
Trimless Fixed

Design Features:

- Made with high powered BRIDGELUX led chip that maintains high lumens per watt with 90+ CRI.
- Available in TRIAC / 0-10v and DALI dimming.
- Standard remodel installation, new construction housing available.
- LED modules and drivers are easily replaceable.
- IC Rated Housing Available up to 18W.
- Extruded aluminium heat sink ensures optimal heat dissipation and LED life.
- 5 Year warranty.



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

SILENTIUM 3 WALL WASH

Specs Code:

FIXTURE ID 1	TRIM OPTION 2	MOUNTING 3	TRIM STYLE 4	TRIM FINISH 5
Silentium 3 Wall Wash Round SLTM3-WW-RO	Trim TR Trimless TRL	Drywall DW Millwork MW	Fixed FX	White WH Black BLK
Silentium 3 Wall Wash Square SLTM3-WW-SQ				
LUMENS/ WATT 6	LED OPTION 7	BEAM ANGLE 8	DIMMING 9	HOUSING 10
L850 / 18W L85/18W L853 / 20W L85/20W	2700K 27K 3000K 30K 3500K 35K 4000K 40K Dim To Warm DTW	Wall Wash WW	TRIAC TRIAC 0-10V DMV DALI DALI	New Construction NC IC Rated Housing IC Remodel RMOD
VOLTAGE 11				
120V 120V 120-277V UNV				

Order Guide:

1	2	3	4	5	6
7	8	9	10		

*Example : SLTM3-WW-RO-TR-DW-FX-BLK-L12/18W-40K-WW-TRIAC-NC-UNV



Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek



SILENTIUM 3 WALL WASH


Product Details:

Round Wall Wash Trim Fixed




Cut out : $3\frac{5}{32}"$ (Ø80 mm)

Round Wall Wash Trimless Fixed

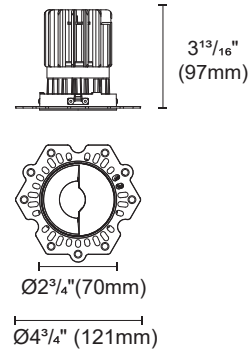


Cut out : $3\frac{5}{32}"$ (Ø80 mm)

Square Wall Wash Trim Fixed

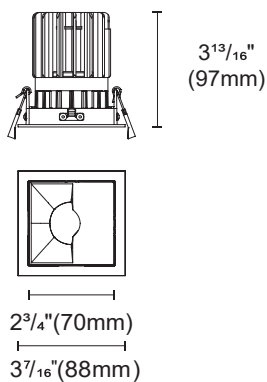

Cut out : $3\frac{5}{32}" \times 3\frac{5}{32}"$ (80X80mm)

Square Wall Wash Trimless Fixed

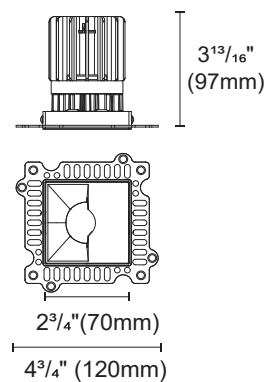

Cut out : $3\frac{5}{32}" \times 3\frac{5}{32}"$ (80X80mm)



Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek

SILENTIUM 3 WALL WASH


Product Details:

Round Wall Wash

New Construction Plate for Trim / Trimless

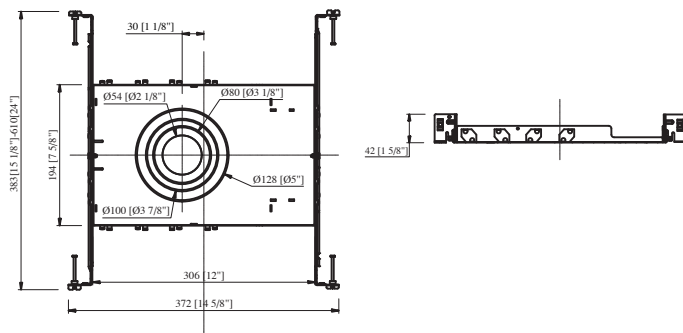


IC Box For Upto 18W

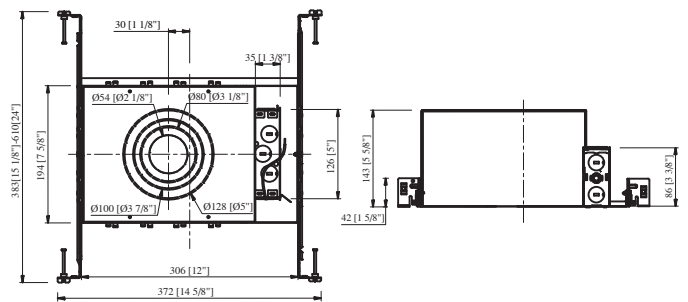


Square Wall Wash

New Construction Plate for Trim / Trimless

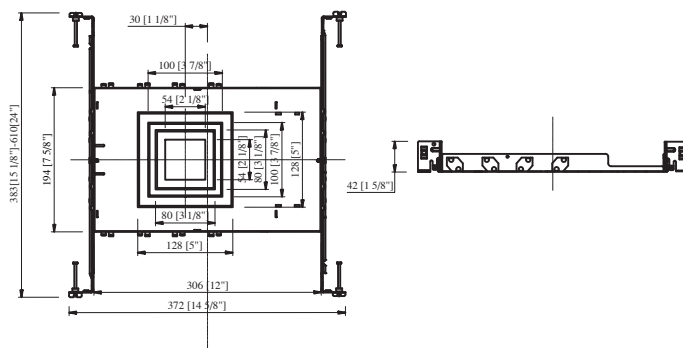

IC Box For Upto 18W

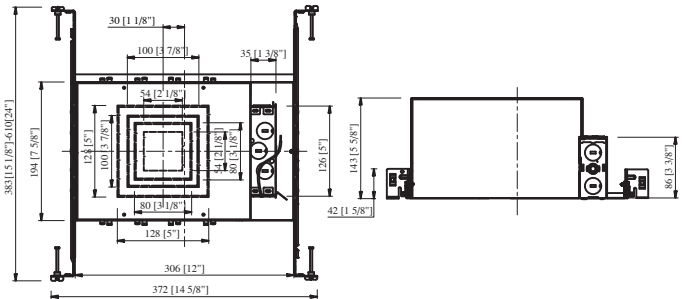

Warranty



DAMP Rated



TRIAC



Dimming







DALI



Intertek

SILENTIUM 3 WALL WASH


Mounting Details:

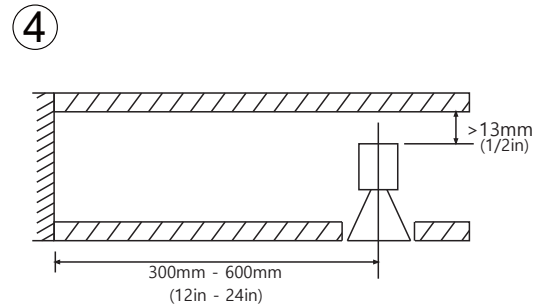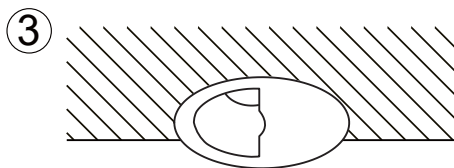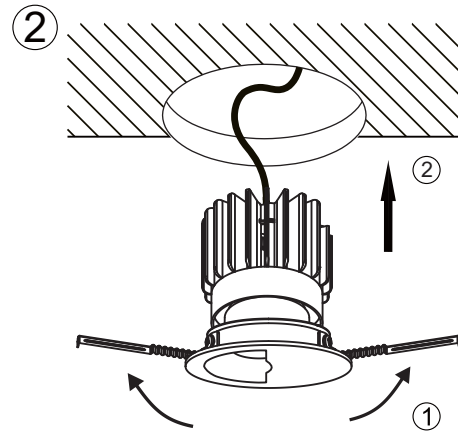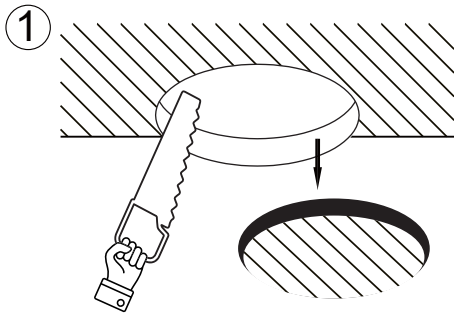


SILENTIUM 3 WALL WASH

Photometric:

Round Fixed -20W-Wall Wash

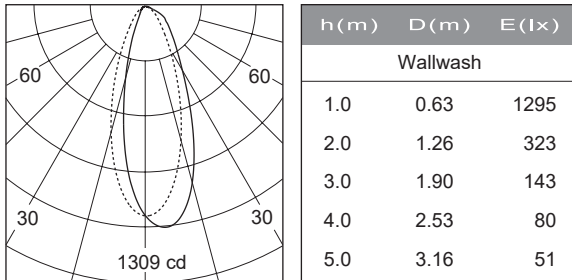

Square Fixed -20W-Wall Wash

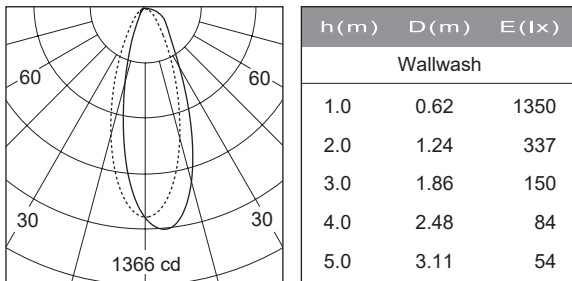

Lighting Chart:


WATT	LUMENS	CCT	CRI
18W	850 lm	3000K	CRI90
20W	853 lm	3000K	CRI90





SILENTIUM 3 WALL WASH

Driver Details:

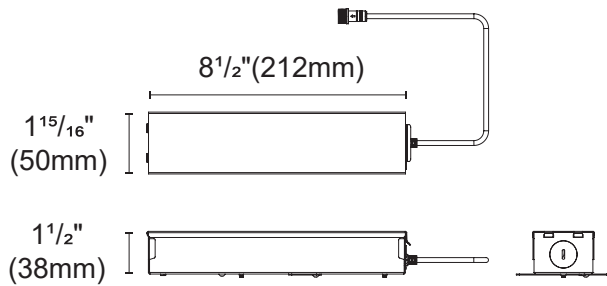

Internal space dimension:

L $8\frac{1}{4}"$ (209mm) X W $1\frac{7}{8}"$ (48mm) X H $1\frac{5}{16}"$ (33mm)

22B-PUP20A-1WMC

0/1-10V

22B-PUP20D-1WMC

DALI

22B-PUP20T-1LMC

TRIAC



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek



SILENTIUM 3 WALL WASH

Technical Details:

Material	Aluminium
Trim Options	Trim / Trimless
Trim Style	Fixed
Trim Finish	White / Black
Lumens	Upto 853lm Non IC And 850lm IC Rated
Wattage	18W / 20W
Efficacy	47 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K / DTW
Beam Angle	Wall Wash
Dimming	TRIAC / 0-10V / DALI
Voltage	120V / 120-277V
Life expectancy	LM 80 > 66,000 Hrs. / LM 70 > 66,000 Hrs.
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Housing	Non IC Rated / IC Rated / Remodel
Certification	ETL LISTED / DAMP RATED



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek