


Type:_____ Qty:_____

Project:_____



HELIUM LYTE

SILENTIUM 3.5 MULTI

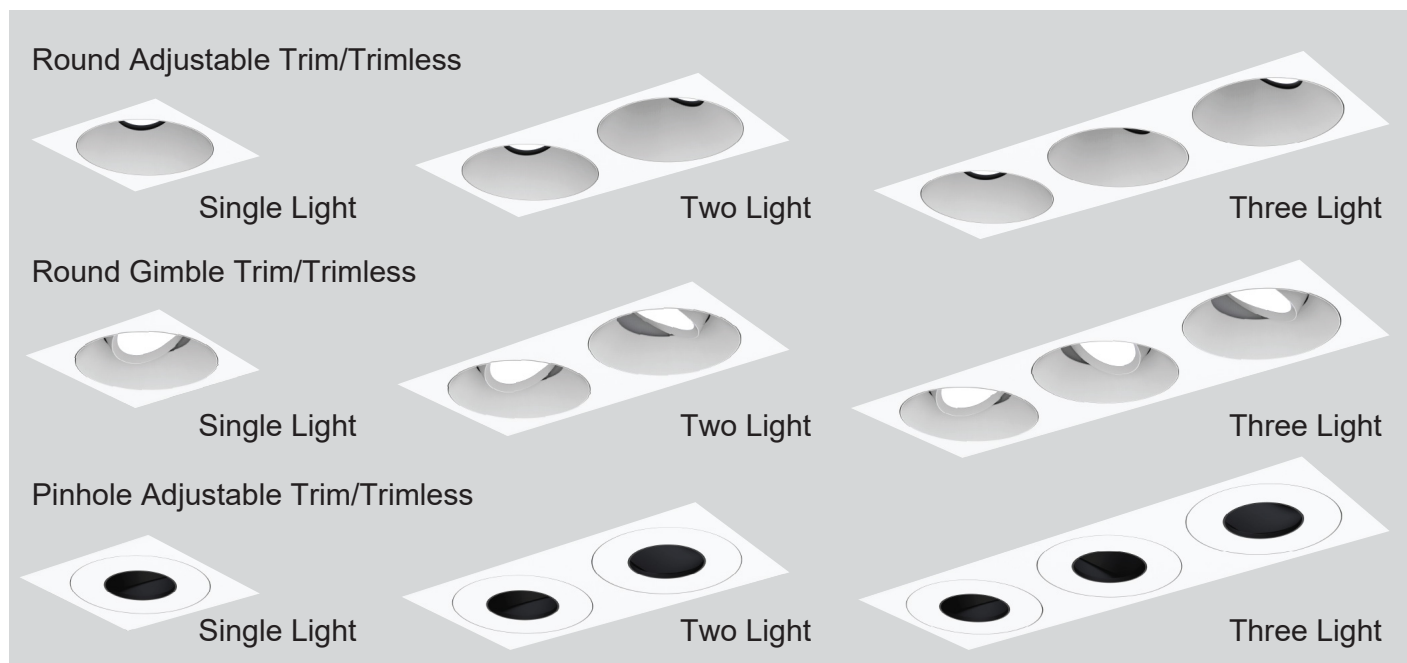

Design Features:

- Made with high powered BRIDGELUX led chip that maintains high lumens per watt with 90+ CRI.
- Available in TRIAC / 0-10v and DALI dimming.
- Standard remodel installation, new construction housing available.
- LED modules and drivers are easily replaceable.
- IC Rated Housing Available up to 10W.
- Extruded aluminium heat sink ensures optimal heat dissipation and LED life.
- Available with accessories for optics.
- 5 Year warranty.



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

SILENTIUM 3.5 MULTI

Specs Code:

FIXTURE ID 1	TRIM OPTION 2	MOUNTING 3	TRIM STYLE 4	TRIM FINISH 5
Silentium 3.5 Multi SLTM3.5-ML	Trim TR Trimless TRL	Drywall DW Millwork MW	Adjustable AD Gimbal Adjustable GAD Pinhole Adjustable PIN	White WH Black BLK
NO. OF LIGHT 6	LUMENS/ WATT 7	LED OPTION 8	BEAM ANGLE 9	DIMMING 10
Single Light 1L	L980 / 14W L98/14W*	2700K 27K	15 Degree 15D	TRIAC TRIAC
Two Light 2L	L1210 / 18W L12/18W*	3000K 30K	30 Degree 30D	0-10V DMV
Three Light 3L	L1580 / 21W L15/21W*	3500K 35K	40 Degree 40D	DALI DALI
	L1750 / 25W L17/25W*	4000K 40K	50 Degree 50D	
	L2257 / 30W L22/30W*	Dim To Warm DTW	60 Degree 60D	
HOUSING 11	VOLTAGE 12			
New Construction NC	120V 120V			
IC Rated Housing IC	120-277V UNV			
Remodel RMOD				

* Please Refer The Lighting Chart For Lumens Per Light.

Order Guide:

1	2	3	4	5	6
7	8	9	10	11	12

*Example : SLTM3.5-ML-TR-DW-FX-BLK-2L-L98/14W-40K-50D-TRIAC-NC-UNV

Accessories :

	Solite Lense [SL]	Frosted Lense [FR]	Hex Louver [HL]
OPTICS			



Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek

SILENTIUM 3.5 MULTI


Product Details:

Round Bevel Trim Adjustable- One Light

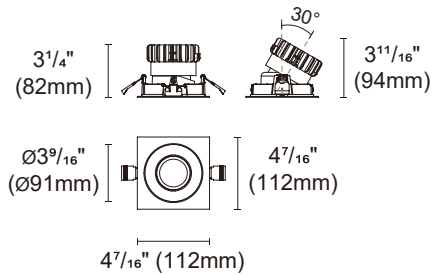


 Cut out : 4¹/₃₂"X4¹/₃₂" (102X102mm)

Round Bevel Trim Adjustable- Two Light

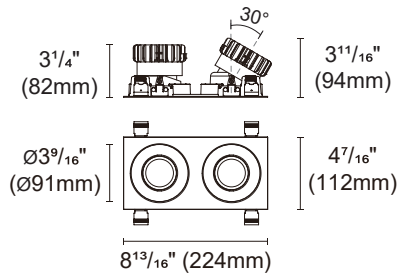


 Cut out : 4¹/₃₂"X8¹¹/₃₂" (102X212mm)

Round Bevel Trim Adjustable- Three Light

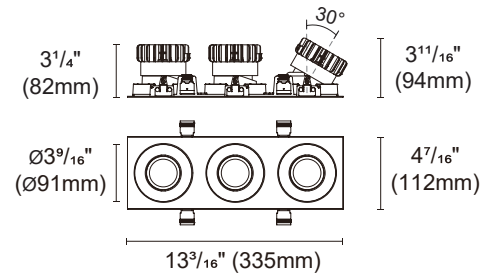


 Cut out : 4¹/₃₂"X12²³/₃₂" (102X323mm)

Round Bevel Trimless Adjustable- One Light

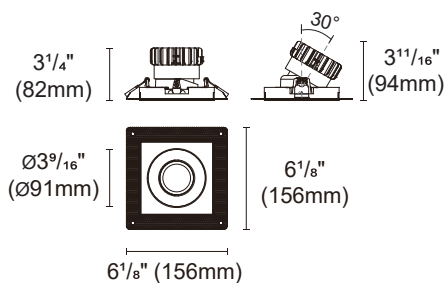


 Cut out : 4²³/₃₂"X4²³/₃₂" (120X120mm)

Round Bevel Trimless Adjustable- Two Light

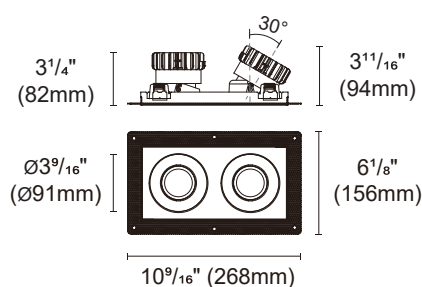

 Cut out : 4²³/₃₂"X9⁴/₃₂" (120X232mm)

Round Bevel Trimless Adjustable- Three Light

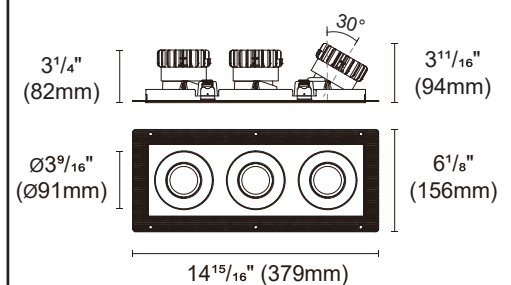

 Cut out : 4²³/₃₂"X13¹⁵/₃₂" (120X342mm)



Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek

SILENTIUM 3.5 MULTI


Product Details:

Round Bevel Trim Gimbal Adjustable - One Light

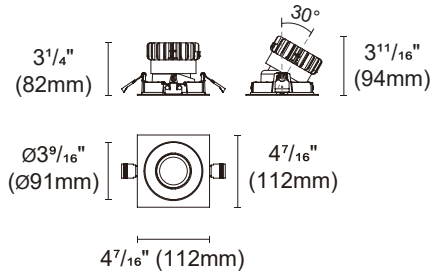


 Cut out : 4 1/32" X 4 1/32" (102 X 102mm)

Round Bevel Trim Gimbal Adjustable - Two Light

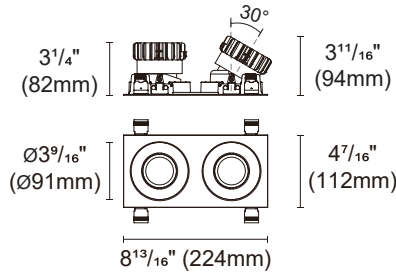


 Cut out : 4 1/32" X 8 11/32" (102 X 212mm)

Round Bevel Trim Gimbal Adjustable - Three Light

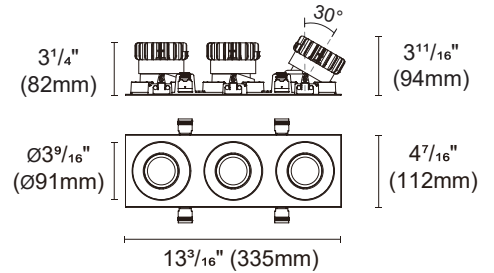


 Cut out : 4 1/32" X 12 23/32" (102 X 323mm)

Round Bevel Trimless Gimbal Adjustable - One Light

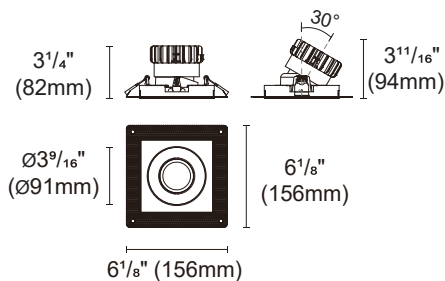


 Cut out : 4 23/32" X 4 23/32" (120 X 120mm)

Round Bevel Trimless Gimbal Adjustable - Two Light

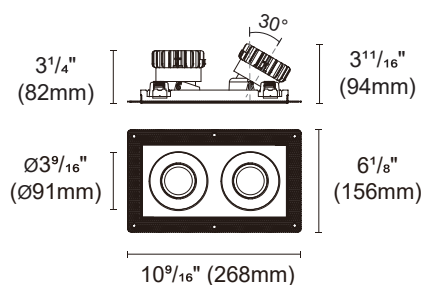

 Cut out : 4 23/32" X 9 4/32" (120 X 232mm)

Round Bevel Trimless Gimbal Adjustable - Three Light

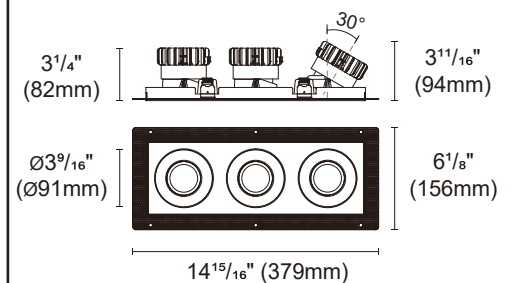

 Cut out : 4 23/32" X 13 15/32" (120 X 342mm)



Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek

SILENTIUM 3.5 MULTI


Product Details:

Round Bevel Trim Pinhole Adjustable - One Light

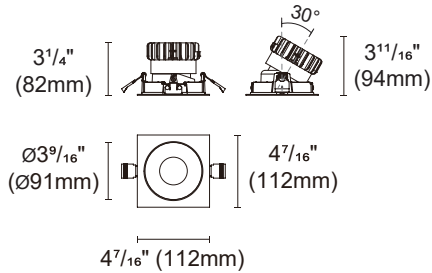


 Cut out : 4 1/32" X 4 1/32" (102 X 102mm)

Round Bevel Trim Pinhole Adjustable - Two Light

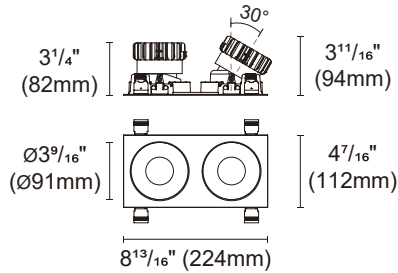


 Cut out : 4 1/32" X 8 11/32" (102 X 212mm)

Round Bevel Trim Pinhole Adjustable - Three Light

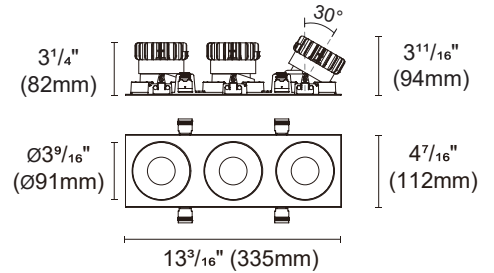


 Cut out : 4 1/32" X 12 23/32" (102 X 323mm)

Round Bevel Trimless Pinhole Adjustable - One Light

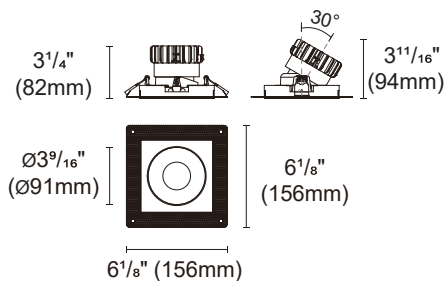


 Cut out : 4 23/32" X 4 23/32" (120 X 120mm)

Round Bevel Trimless Pinhole Adjustable - Two Light

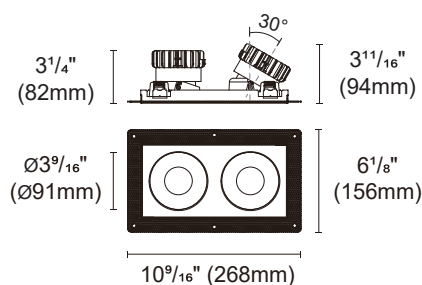

 Cut out : 4 23/32" X 9 4/32" (120 X 232mm)

Round Bevel Trimless Pinhole Adjustable - Three Light

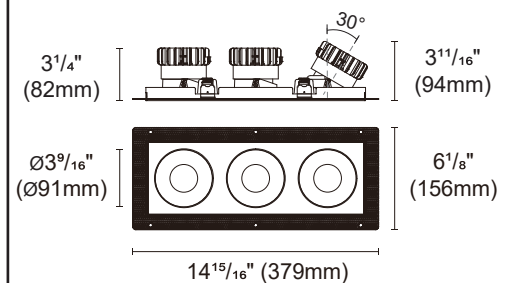

 Cut out : 4 23/32" X 13 15/32" (120 X 342mm)



Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek


SILENTIUM 3.5 MULTI

Product Details:


New Construction Plate
For Single Light
Trim / Trimless




New Construction Plate
For Two Light Trim / Trimless




New Construction Plate
For Three Light Trim / Trimless

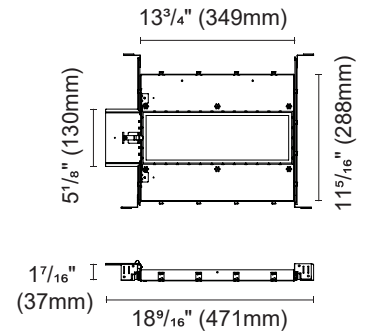

IC BOX For Single Light
Upto 21W

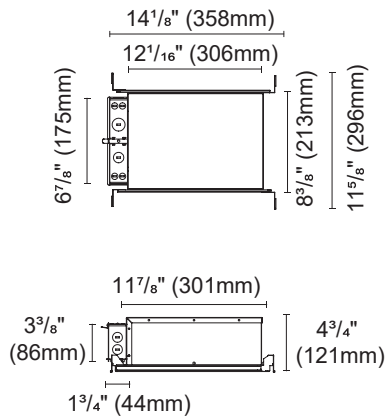

IC BOX For Single Light
For 25 & 30W

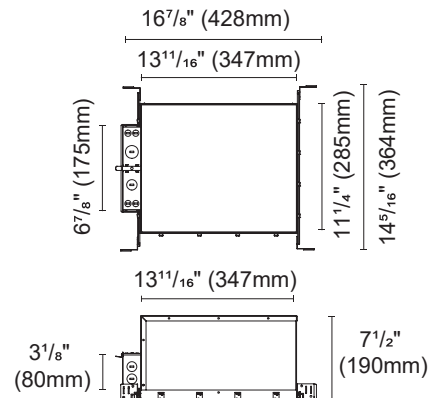

Warranty



DAMP Rated



TRIAC



Dimming







DALI



Intertek

SILENTIUM 3.5 MULTI


Mounting Details:

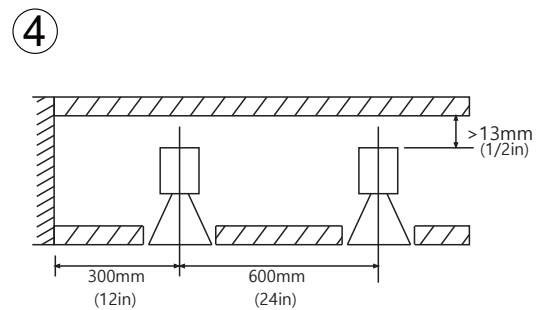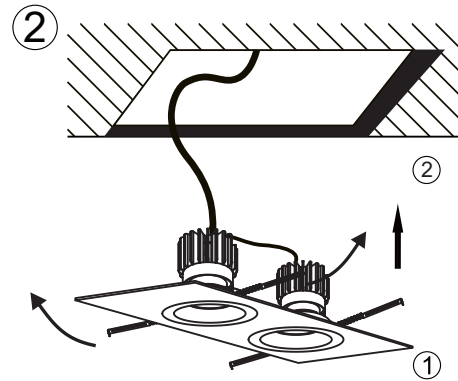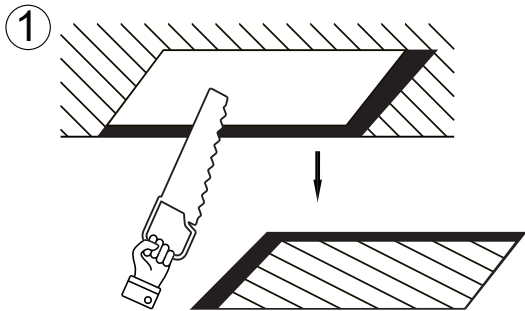


SILENTIUM 3.5 MULTI

Photometric:

Round Adjustable -21W-36D

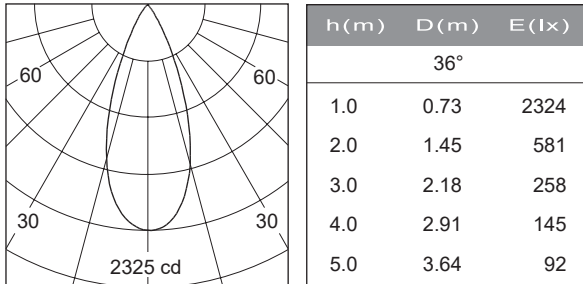

Round Gimbal Adjustable -21W-24D

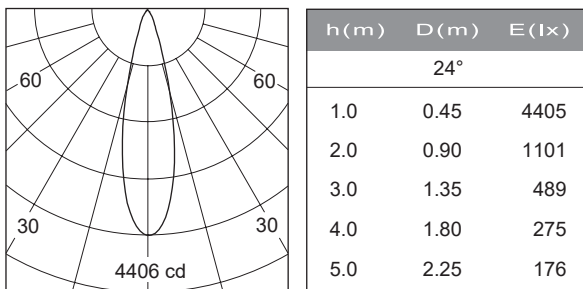

Lighting Chart:

WATT	LUMENS	CCT	CRI
1 X 14W	1 X 980 lm	3000K	CRI90
2 X 14W	2 X 980 lm	3000K	CRI90
3 X 14W	3 X 980 lm	3000K	CRI90



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek



SILENTIUM 3.5 MULTI

Lighting Chart:

WATT	LUMENS	CCT	CRI
1 X 18W	1 X 1210 lm	3000K	CRI90
2 X 18W	2 X 1210 lm	3000K	CRI90
3 X 18W	3 X 1210 lm	3000K	CRI90

WATT	LUMENS	CCT	CRI
1 X 21W	1 X 1580 lm	3000K	CRI90
2 X 21W	2 X 1580 lm	3000K	CRI90
3 X 21W	3 X 1580 lm	3000K	CRI90

WATT	LUMENS	CCT	CRI
1 X 25W	1 X 1750 lm	3000K	CRI90
2 X 25W	2 X 1750 lm	3000K	CRI90
3 X 25W	3 X 1750 lm	3000K	CRI90

WATT	LUMENS	CCT	CRI
1 X 30W	1 X 2257 lm	3000K	CRI90
2 X 30W	2 X 2257 lm	3000K	CRI90
3 X 30W	3 X 2257 lm	3000K	CRI90



Warranty



DAMP Rated



TRIAC



Dimming




DALI



Intertek

SILENTIUM 3.5 MULTI

Driver Details:

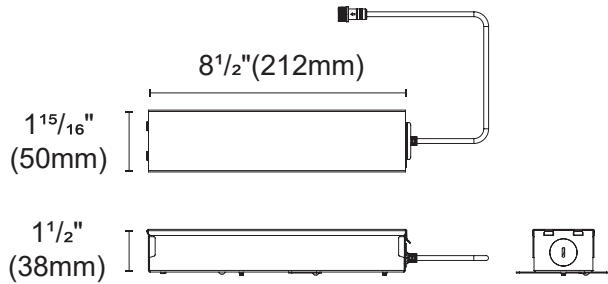

22B-PUP20A-1WMC

0/1-10V

22B-PUP20D-1WMC

DALI


22B-PUP20T-1LMC

TRIAC

Internal space dimension:

L 8 1/4" (209mm) X W 1 7/8" (48mm) X H 1 5/16" (33mm)

* Suitable for 14-21W

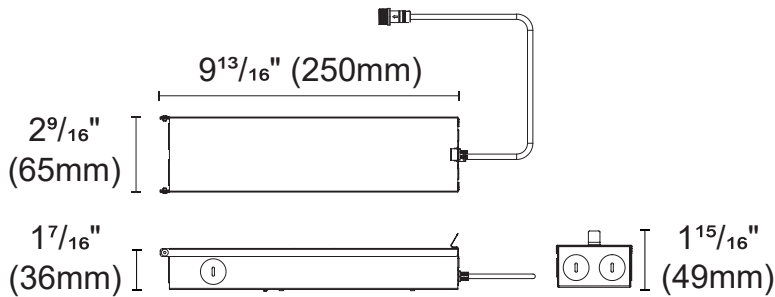

16B-PUP40A-1WMC-850

0/1-10V

16B-PUP40D-1WMC-850

DALI

16B-PUP40T-1LMC-850

TRIAC

Internal space dimension:

L 9 13/16" (250mm) X W 2 1/2" (64mm) X H 1 5/16" (34mm)

* Suitable for 25-30W



Warranty



DAMP Rated



TRIAC



Dimming




DALI



Intertek

SILENTIUM 3.5 MULTI

Driver Details:

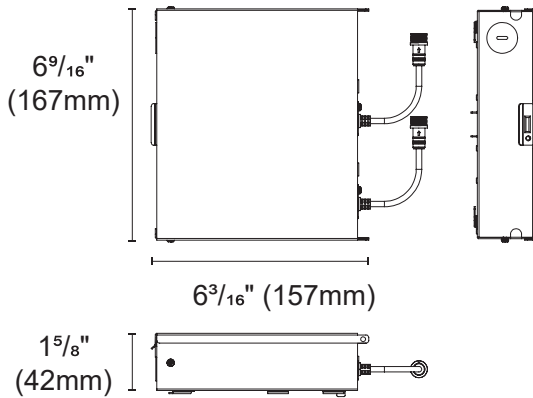

32B-PUP20A-1WMC

0/1-10V

32B-PUP20D-1WMC

DALI

32B-PUP20T-1LMC

TRIAC

* Suitable for two light - 14-21W

32B-PUP40A-1WMC-850

0/1-10V


32B-PUP40D-1WMC-850

DALI

32B-PUP40T-1LMC-850

TRIAC

* Suitable for two light - 25-30W

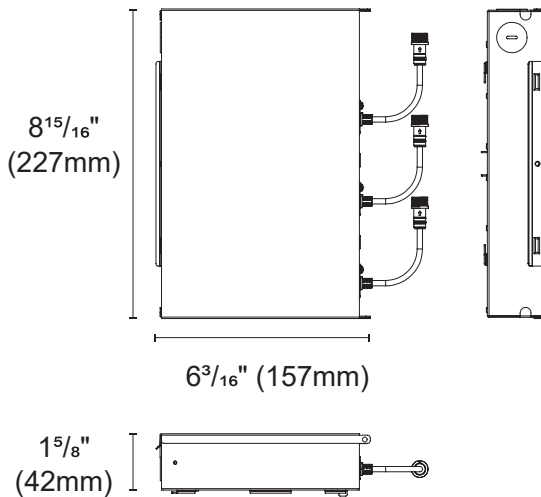

33B-PUP20A-1WMC

0/1-10V

33B-PUP20D-1WMC

DALI

33B-PUP20T-1LMC

TRIAC

* Suitable for three light - 14-21W

33B-PUP40A-1WMC-850

0/1-10V

33B-PUP40D-1WMC-850

DALI

33B-PUP40T-1LMC-850

TRIAC

* Suitable for three light - 25-30W



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

SILENTIUM 3.5 MULTI

Technical Details:

Material	Aluminium
Trim Options	Trim / Trimless
Trim Style	Adjustable / Gimbal Adjustable
	/ Pinhole Adjustable
Trim Finish	White / Black
Lumens	Upto 2257lm Non IC And 1750lm IC Rated
Wattage	14W / 18W / 21W / 25W / 30W
No. Of Lights	1 Light / 2 Light / 3 Light
Efficacy	70 Lm/W
UGR	<16
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K / DTW
Beam Angle	15° / 30° / 40° / 50° / 60°
Dimming	TRIAC / 0-10V / DALI
Voltage	120V / 120-277V
Life expectancy	LM 80 > 66,000 Hrs. / LM 70 > 66,000 Hrs.
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Housing	Non IC Rated / IC Rated / Remodel
Certification	ETL LISTED / DAMP RATED



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek