


Type:_____ Qty:_____

Project:_____



HELIUM LYTE

SILENTIUM 3.5 MULTI

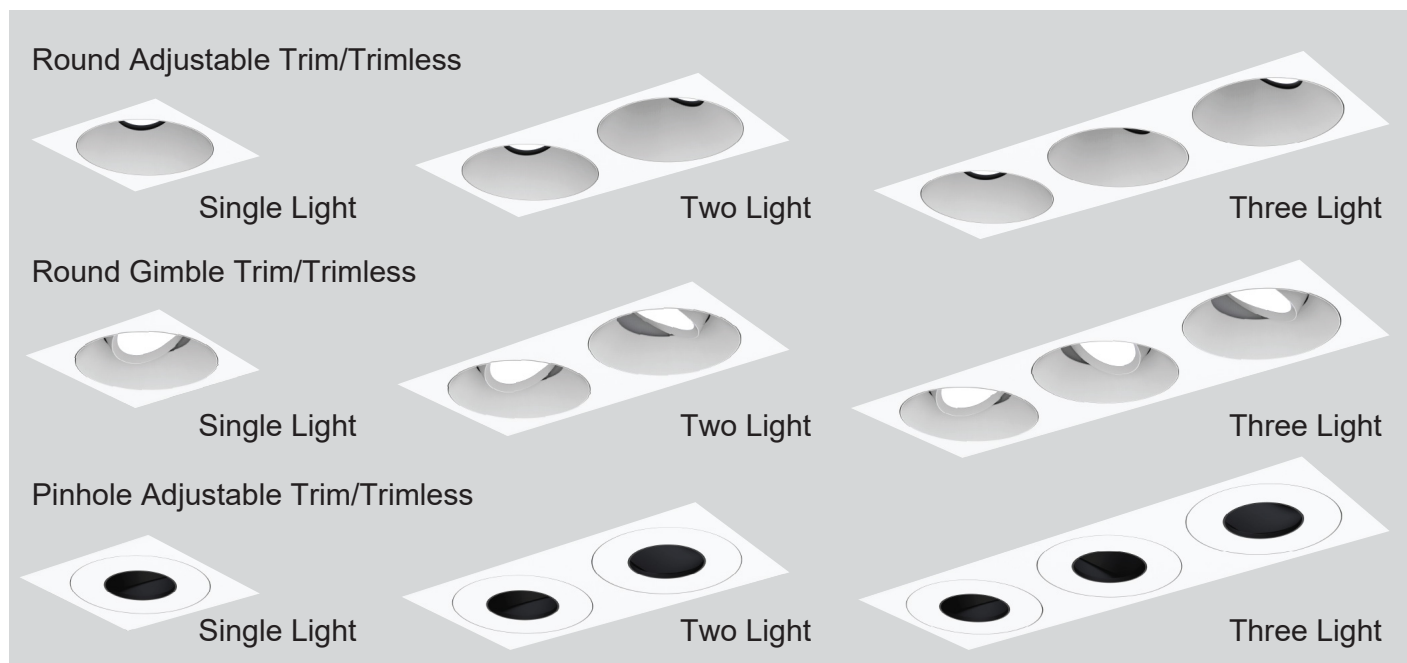

Design Features:

- Made with high powered BRIDGELUX led chip that maintains high lumens per watt with 90+ CRI.
- Available in TRIAC / 0-10v and DALI dimming.
- Standard remodel installation, new construction housing available.
- LED modules and drivers are easily replaceable.
- IC Rated Housing Available up to 10W.
- Extruded aluminium heat sink ensures optimal heat dissipation and LED life.
- Available with accessories for optics.
- 5 Year warranty.



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

SILENTIUM 3.5 MULTI

Specs Code:

FIXTURE ID 1	TRIM OPTION 2	MOUNTING 3	TRIM STYLE 4	TRIM FINISH 5
Silentium 3.5 Multi SLTM3.5-ML	Trim TR Trimless TRL	Drywall DW Millwork MW	Adjustable AD Gimbal Adjustable GAD Pinhole Adjustable PIN	White WH Black BLK
NO. OF LIGHT 6	LUMENS/ WATT 7	LED OPTION 8	BEAM ANGLE 9	DIMMING 10
Single Light 1L	L980 / 14W L98/14W*	2700K 27K	15 Degree 15D	TRIAC TRIAC
Two Light 2L	L1210 / 18W L12/18W*	3000K 30K	30 Degree 30D	0-10V DMV
Three Light 3L	L1580 / 21W L15/21W* L1750 / 25W L17/25W* L2257 / 30W L22/30W*	3500K 35K 4000K 40K Dim To Warm DTW	40 Degree 40D 50 Degree 50D 60 Degree 60D	DALI DALI
HOUSING 11	VOLTAGE 12			
New Construction NC IC Rated Housing IC Remodel RMOD	120V 120V 120-277V UNV			

* Please Refer The Lighting Chart For Lumens Per Light.

Order Guide:

1	2	3	4	5	6
7	8	9	10	11	12

*Example : SLTM3.5-ML-TR-DW-FX-BLK-2L-L98/14W-40K-50D-TRIAC-NC-UNV

Accessories :

	Solite Lense [SL]	Frosted Lense [FR]	Hex Louver [HL]
OPTICS			



Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek

SILENTIUM 3.5 MULTI


Product Details:

Round Bevel Trim
Adjustable- One Light

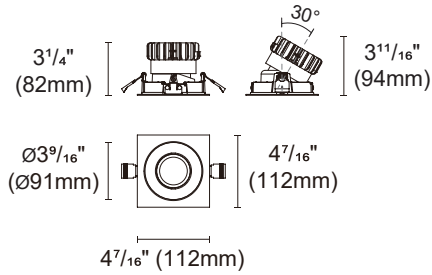


 Cut out : 4¹/₃₂"X4¹/₃₂" (102X102mm)

Round Bevel Trim
Adjustable- Two Light

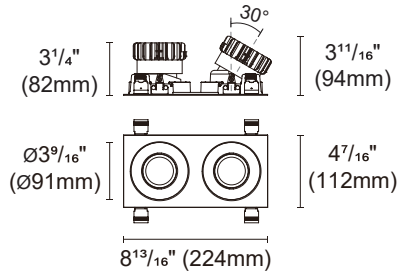


 Cut out : 4¹/₃₂"X8¹¹/₃₂" (102X212mm)

Round Bevel Trim
Adjustable- Three Light

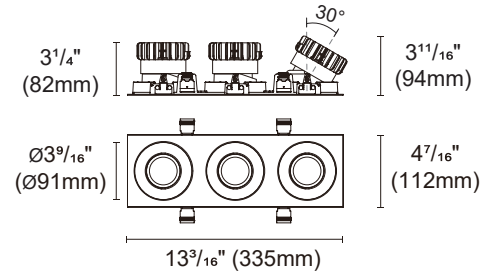


 Cut out : 4¹/₃₂"X12²³/₃₂" (102X323mm)

Round Bevel Trimless
Adjustable- One Light

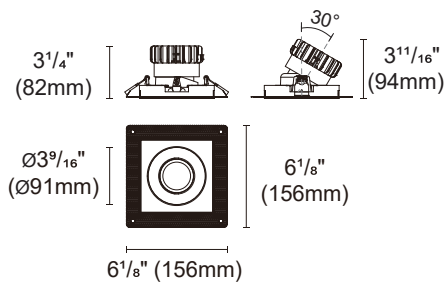


 Cut out : 4²³/₃₂"X4²³/₃₂" (120X120mm)

Round Bevel Trimless
Adjustable- Two Light

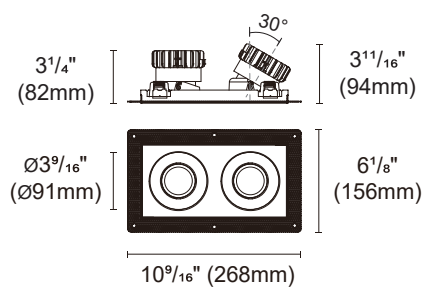

 Cut out : 4²³/₃₂"X9⁴/₃₂" (120X232mm)

Round Bevel Trimless
Adjustable- Three Light

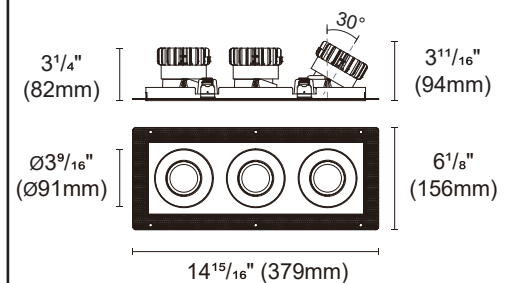

 Cut out : 4²³/₃₂"X13¹⁵/₃₂" (120X342mm)



Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek

SILENTIUM 3.5 MULTI


Product Details:

Round Bevel Trim Gimbal Adjustable - One Light

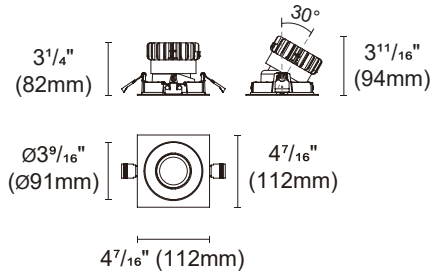


 Cut out : 4 1/32" X 4 1/32" (102 X 102mm)

Round Bevel Trim Gimbal Adjustable - Two Light

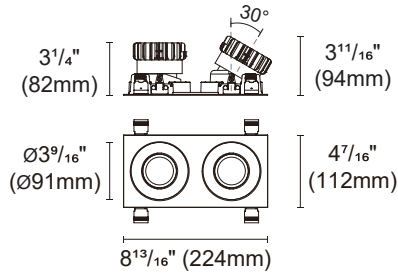


 Cut out : 4 1/32" X 8 11/32" (102 X 212mm)

Round Bevel Trim Gimbal Adjustable - Three Light

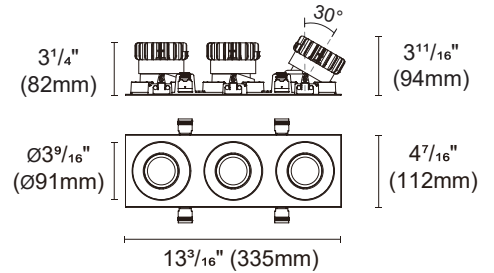


 Cut out : 4 1/32" X 12 23/32" (102 X 323mm)

Round Bevel Trimless Gimbal Adjustable - One Light

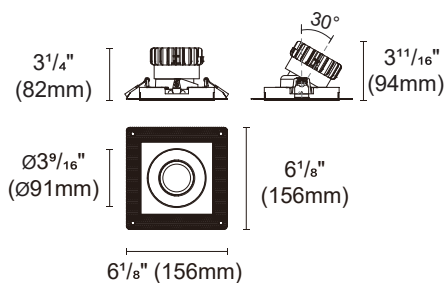


 Cut out : 4 23/32" X 4 23/32" (120 X 120mm)

Round Bevel Trimless Gimbal Adjustable - Two Light

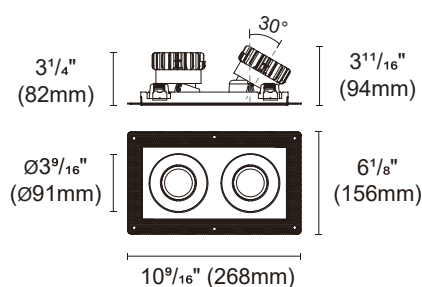

 Cut out : 4 23/32" X 9 4/32" (120 X 232mm)

Round Bevel Trimless Gimbal Adjustable - Three Light

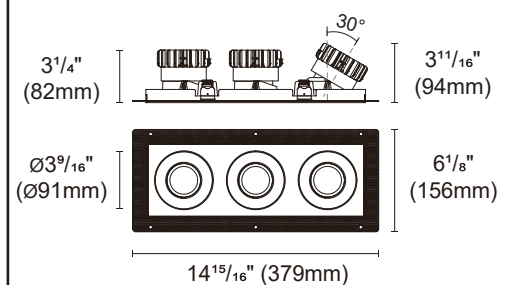

 Cut out : 4 23/32" X 13 15/32" (120 X 342mm)



Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek

SILENTIUM 3.5 MULTI


Product Details:

Round Bevel Trim Pinhole Adjustable - One Light

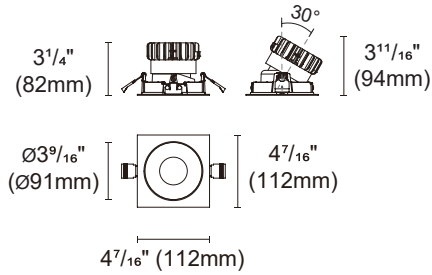


 Cut out : 4 1/32" X 4 1/32" (102 X 102mm)

Round Bevel Trim Pinhole Adjustable - Two Light

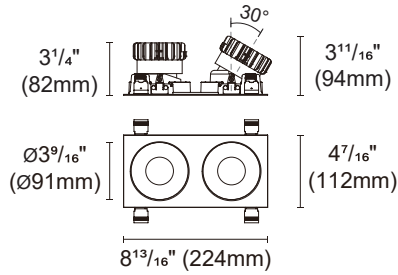


 Cut out : 4 1/32" X 8 11/32" (102 X 212mm)

Round Bevel Trim Pinhole Adjustable - Three Light

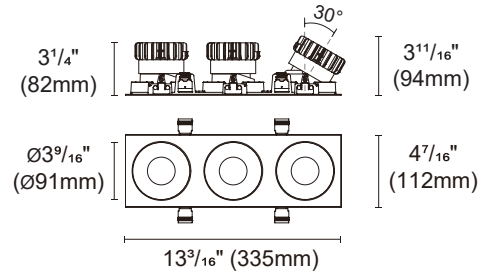


 Cut out : 4 1/32" X 12 23/32" (102 X 323mm)

Round Bevel Trimless Pinhole Adjustable - One Light

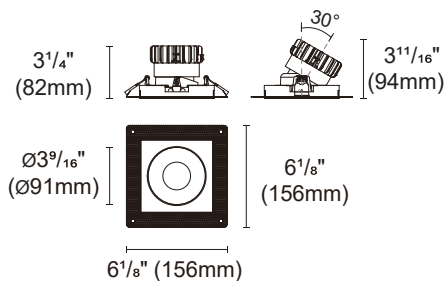


 Cut out : 4 23/32" X 4 23/32" (120 X 120mm)

Round Bevel Trimless Pinhole Adjustable - Two Light

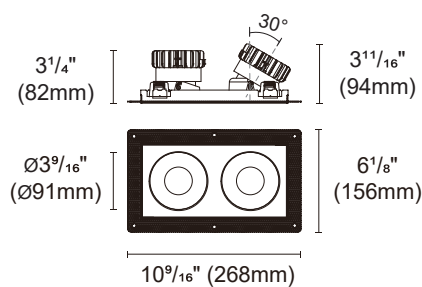

 Cut out : 4 23/32" X 9 4/32" (120 X 232mm)

Round Bevel Trimless Pinhole Adjustable - Three Light

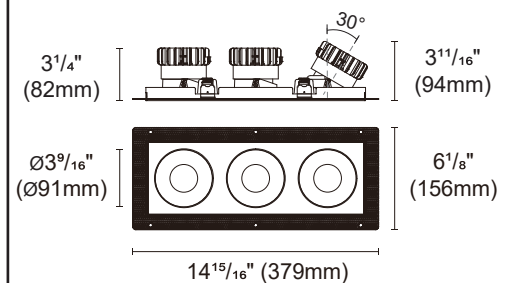

 Cut out : 4 23/32" X 13 15/32" (120 X 342mm)



Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek


SILENTIUM 3.5 MULTI

Product Details:


New Construction Plate
For Single Light
Trim / Trimless




New Construction Plate
For Two Light Trim / Trimless




New Construction Plate
For Three Light Trim / Trimless

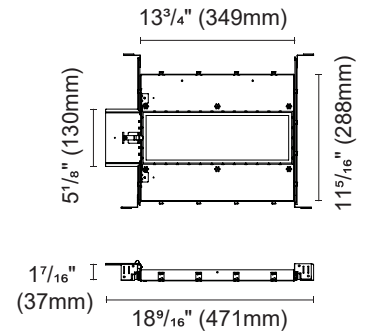

IC BOX For Single Light
Upto 14W

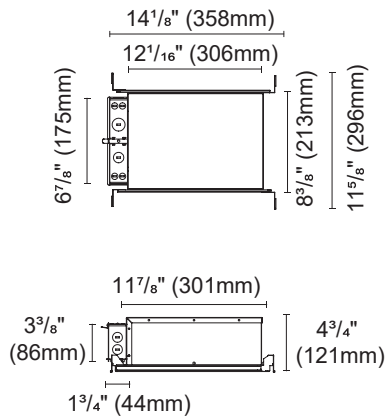

IC BOX For Single Light
For 21W

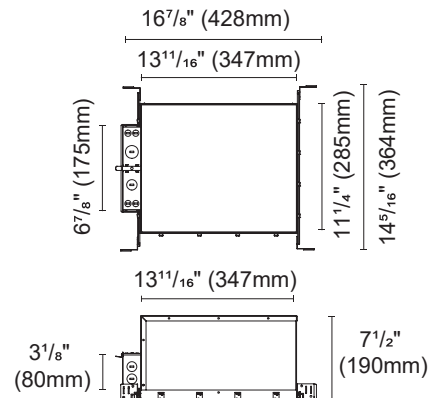

Warranty



DAMP Rated



TRIAC



Dimming







DALI



Intertek

SILENTIUM 3.5 MULTI


Mounting Details:

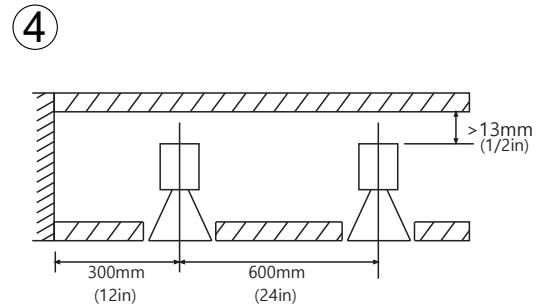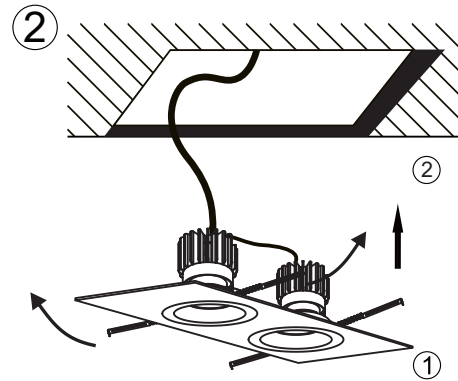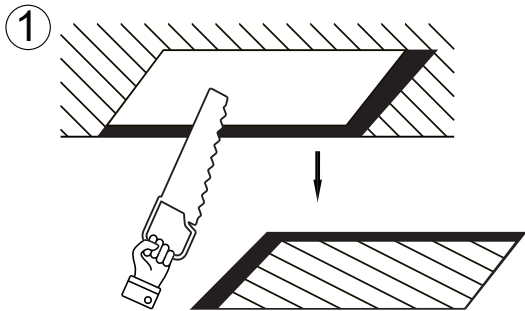


SILENTIUM 3.5 MULTI

Photometric:

Round Adjustable -21W-36D

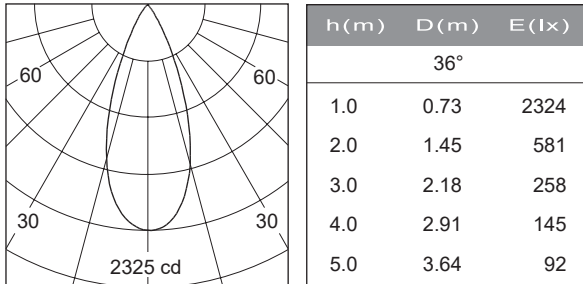

Round Gimbal Adjustable -21W-24D

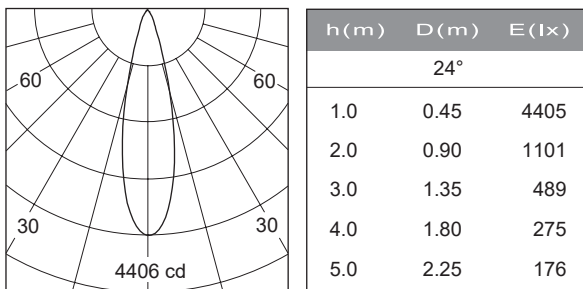

Lighting Chart:

WATT	LUMENS	CCT	CRI
1 X 14W	1 X 980 lm	3000K	CRI90
2 X 14W	2 X 980 lm	3000K	CRI90
3 X 14W	3 X 980 lm	3000K	CRI90



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek



SILENTIUM 3.5 MULTI

Lighting Chart:

WATT	LUMENS	CCT	CRI
1 X 18W	1 X 1210 lm	3000K	CRI90
2 X 18W	2 X 1210 lm	3000K	CRI90
3 X 18W	3 X 1210 lm	3000K	CRI90

WATT	LUMENS	CCT	CRI
1 X 21W	1 X 1580 lm	3000K	CRI90
2 X 21W	2 X 1580 lm	3000K	CRI90
3 X 21W	3 X 1580 lm	3000K	CRI90

WATT	LUMENS	CCT	CRI
1 X 25W	1 X 1750 lm	3000K	CRI90
2 X 25W	2 X 1750 lm	3000K	CRI90
3 X 25W	3 X 1750 lm	3000K	CRI90

WATT	LUMENS	CCT	CRI
1 X 30W	1 X 2257 lm	3000K	CRI90
2 X 30W	2 X 2257 lm	3000K	CRI90
3 X 30W	3 X 2257 lm	3000K	CRI90



Warranty



DAMP Rated



TRIAC



Dimming




DALI



Intertek

SILENTIUM 3.5 MULTI

Driver Details:

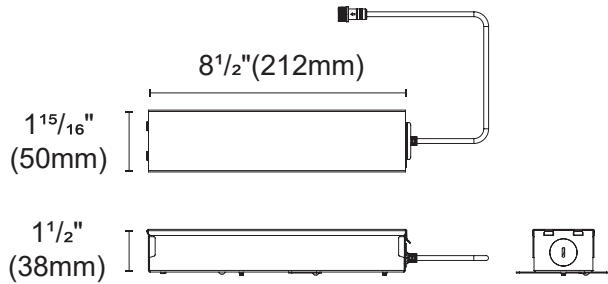


22B-PUP20A-1WMC
22B-PUP20D-1WMC
22B-PUP20T-1LMC

0/1-10V
DALI
TRIAC

Internal space dimension:

L 8 1/4" (209mm) X W 1 7/8" (48mm) X H 1 5/16" (33mm)

* Suitable for 14-21W

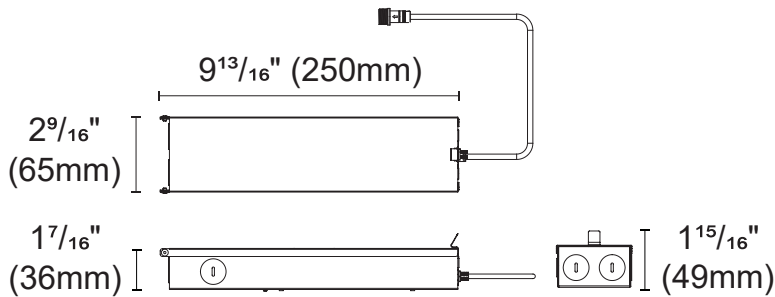

16B-PUP40A-1WMC-850
16B-PUP40D-1WMC-850
16B-PUP40T-1LMC-850

0/1-10V
DALI
TRIAC

Internal space dimension:

L 9 13/16" (250mm) X W 2 1/2" (64mm) X H 1 5/16" (34mm)

* Suitable for 25-30W



Warranty



DAMP Rated



TRIAC



Dimming




DALI



Intertek

SILENTIUM 3.5 MULTI

Driver Details:

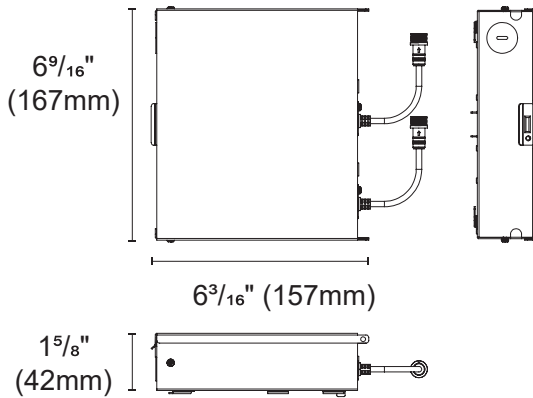

32B-PUP20A-1WMC

0/1-10V

32B-PUP20D-1WMC

DALI

32B-PUP20T-1LMC

TRIAC

* Suitable for two light - 14-21W

32B-PUP40A-1WMC-850

0/1-10V


32B-PUP40D-1WMC-850

DALI

32B-PUP40T-1LMC-850

TRIAC

* Suitable for two light - 25-30W

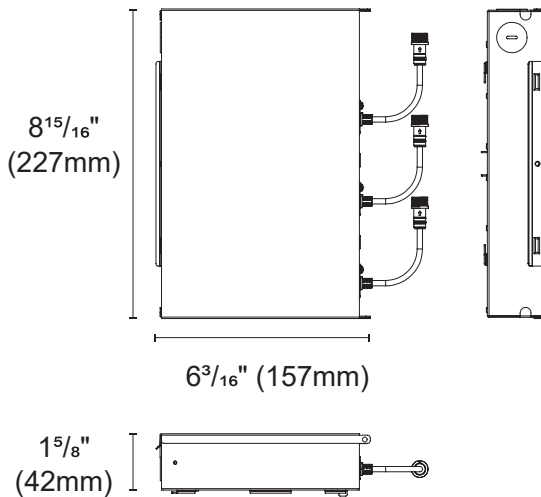

33B-PUP20A-1WMC

0/1-10V

33B-PUP20D-1WMC

DALI

33B-PUP20T-1LMC

TRIAC

* Suitable for three light - 14-21W

33B-PUP40A-1WMC-850

0/1-10V

33B-PUP40D-1WMC-850

DALI

33B-PUP40T-1LMC-850

TRIAC

* Suitable for three light - 25-30W



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

SILENTIUM 3.5 MULTI

Technical Details:

Material	Aluminium
Trim Options	Trim / Trimless
Trim Style	Adjustable / Gimbal Adjustable
	/ Pinhole Adjustable
Trim Finish	White / Black
Lumens	Upto 2257lm Non IC And 1750lm IC Rated
Wattage	14W / 18W / 21W / 25W / 30W
No. Of Lights	1 Light / 2 Light / 3 Light
Efficacy	70 Lm/W
UGR	<16
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K / DTW
Beam Angle	15° / 30° / 40° / 50° / 60°
Dimming	TRIAC / 0-10V / DALI
Voltage	120V / 120-277V
Life expectancy	LM 80 > 66,000 Hrs. / LM 70 > 66,000 Hrs.
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Housing	Non IC Rated / IC Rated / Remodel
Certification	ETL LISTED / DAMP RATED



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek