

Type: _____ Qty: _____

Project: _____




HELIUM LYTE


SILENTIUM 3.5 MULTI WALL WASH

Round Wall Wash Adjustable Trim/Trimless


Single Light

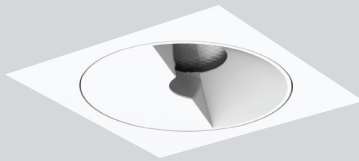

Two Light

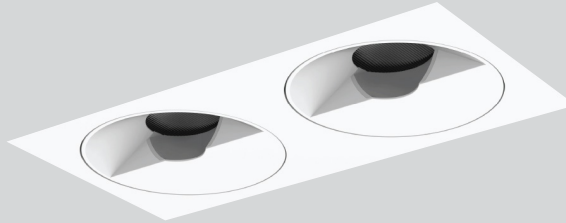

Three Light

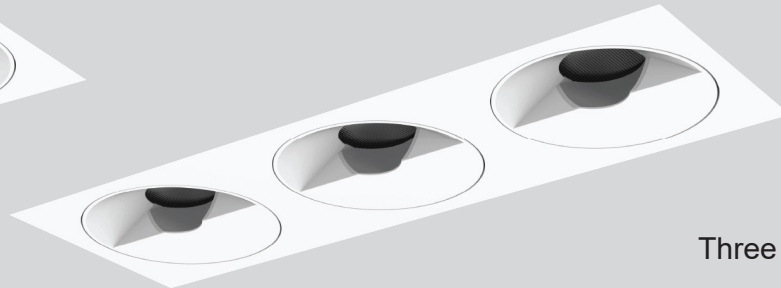

Design Features:

- Made with high powered BRIDGELUX led chip that maintains high lumens per watt with 90+ CRI.
- Available in TRIAC / 0-10v and DALI dimming.
- Standard remodel installation, new construction housing available.
- LED modules and drivers are easily replaceable.
- IC Rated Housing Available up to 25W.
- Extruded aluminium heat sink ensures optimal heat dissipation and LED life.
- 5 Year warranty.



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

SILENTIUM 3.5 MULTI WALL WASH

Specs Code:

FIXTURE ID 1	TRIM OPTION 2	MOUNTING 3	TRIM STYLE 4	TRIM FINISH 5
Silentium 3.5 Multi Wall Wash SLTM3.5-ML-WW	Trim TR Trimless TRL	Drywall DW Millwork MW	Adjustable AD	White WH Black BLK
NO. OF LIGHT 6	LUMENS/ WATT 7	LED OPTION 8	BEAM ANGLE 9	DIMMING 10
Single Light 1L Two Light 2L Three Light 3L	L686 / 14W L68/14W* L713 / 18W L71/18W* L1100 / 21W L11/21W* L1184 / 25W L11/25W* L1497 / 30W L14/30W*	2700K 27K 3000K 30K 3500K 35K 4000K 40K Dim To Warm DTW	Wall Wash WW	TRIAC TRIAC 0-10V DMV DALI DALI
HOUSING 11	VOLTAGE 12			
New Construction NC IC Rated Housing IC Remodel RMOD	120V 120V 120-277V UNV			

* Please Refer The Lighting Chart For Lumens Per Light.

Order Guide:

1	2	3	4	5	6
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
7	8	9	10	11	12
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>


*Example : SLTM3.5-ML-WW-TR-DW-AD-WH-2L-L68/14W-40K-WW-TRIAC-NC-UNV



SILENTIUM 3.5 MULTI WALL WASH


Product Details:

Wall Wash Trim Adjustable- One Light

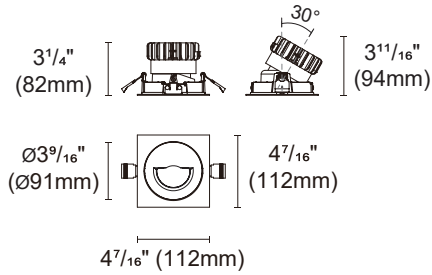


Cut out : 4 1/32" X 4 1/32" (102 X 102mm)

Wall Wash Trim Adjustable- Two Light

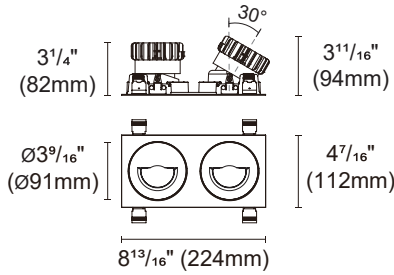


Cut out : 4 1/32" X 8 11/32" (102 X 212mm)

Wall Wash Trim Adjustable- Three Light

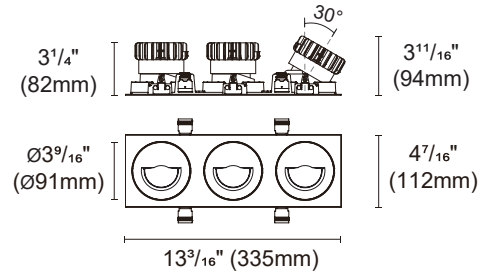


Cut out : 4 1/32" X 12 23/32" (102 X 323mm)

Wall Wash Trimless Adjustable- One Light

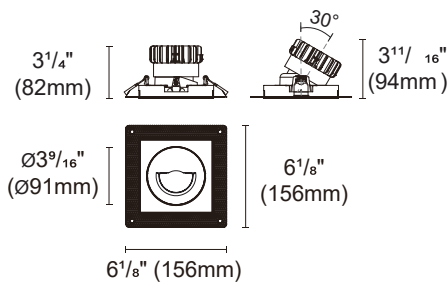


Cut out : 4 23/32" X 4 23/32" (120 X 120mm)

Wall Wash Trimless Adjustable- Two Light

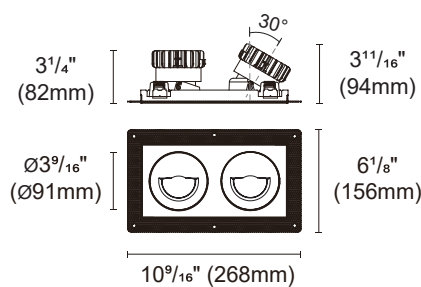

Cut out : 4 23/32" X 9 4/32" (120 X 232mm)

Wall Wash Trimless Adjustable- Three Light

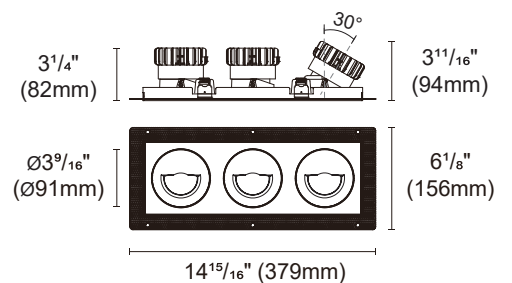

Cut out : 4 23/32" X 13 15/32" (120 X 342mm)



Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek




SILENTIUM 3.5 MULTI WALL WASH

Product Details:


New Construction Plate
For Single Light
- Trim / Trimless

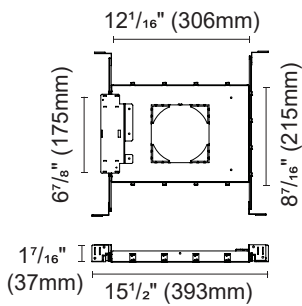


New Construction Plate
For Two Light
- Trim / Trimless

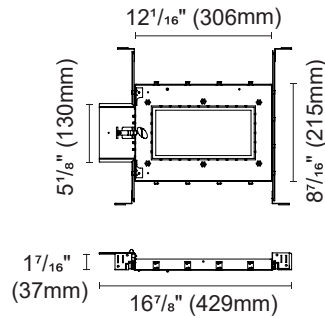


New Construction Plate
For Three Light
- Trim / Trimless

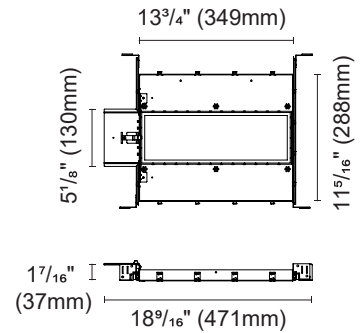

IC BOX For Single Light
Upto 14W




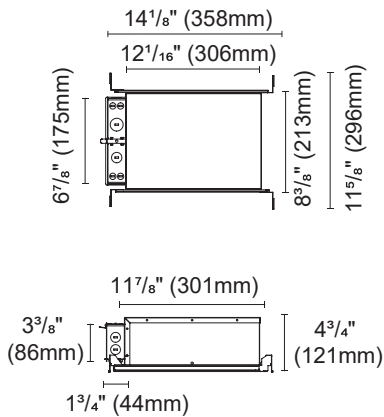


IC BOX For Single Light
For 21W

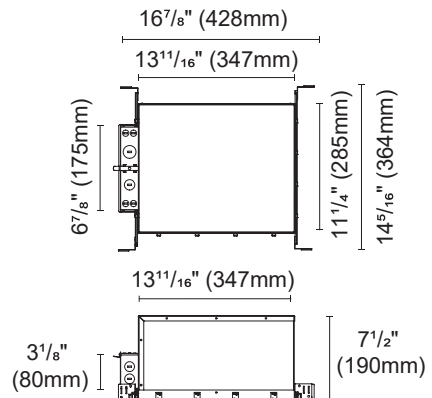

SILENTIUM 3.5 MULTI WALL WASH

Mounting Details:

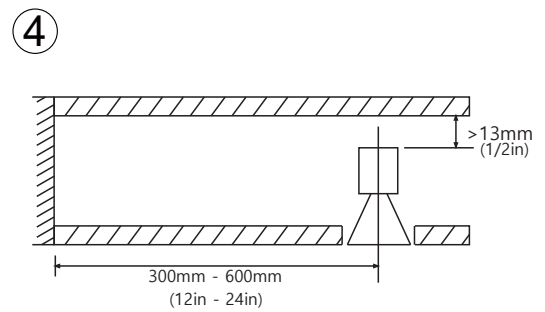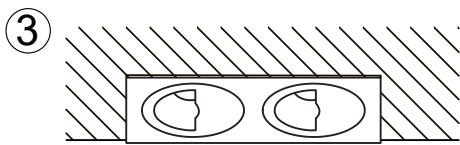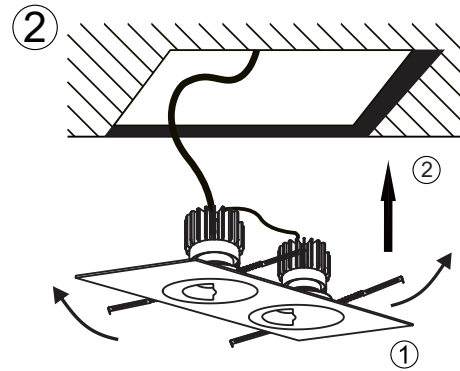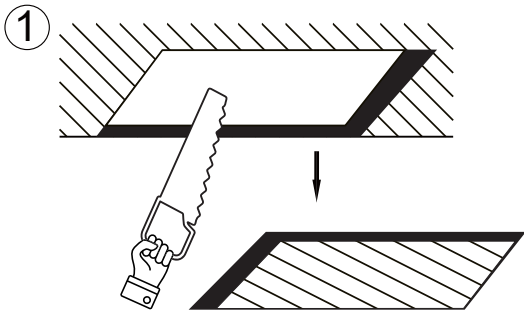

Warranty



DAMP Rated



TRIAC



Dimming



DALI




Intertek

SILENTIUM 3.5 MULTI WALL WASH

Photometric:

Round Fixed -30W-Wall Wash

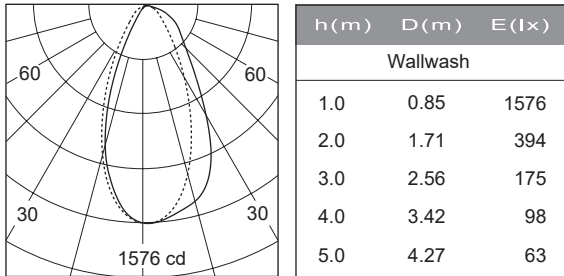

Lighting Chart:

WATT	LUMENS	CCT	CRI
1 X 14W	1 X 686 lm	3000K	CRI90
2 X 14W	2 X 686 lm	3000K	CRI90
3 X 14W	3 X 686 lm	3000K	CRI90



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

SILENTIUM 3.5 MULTI WALL WASH

Lighting Chart:

WATT	LUMENS	CCT	CRI
1 X 18W	1 X 713 lm	3000K	CRI90
2 X 18W	2 X 713 lm	3000K	CRI90
3 X 18W	3 X 713 lm	3000K	CRI90

WATT	LUMENS	CCT	CRI
1 X 21W	1 X 1100 lm	3000K	CRI90
2 X 21W	2 X 1100 lm	3000K	CRI90
3 X 21W	3 X 1100 lm	3000K	CRI90

WATT	LUMENS	CCT	CRI
1 X 25W	1 X 1184 lm	3000K	CRI90
2 X 25W	2 X 1184 lm	3000K	CRI90
3 X 25W	3 X 1184 lm	3000K	CRI90

WATT	LUMENS	CCT	CRI
1 X 30W	1 X 1497 lm	3000K	CRI90
2 X 30W	2 X 1497 lm	3000K	CRI90
3 X 30W	3 X 1497 lm	3000K	CRI90



Warranty



DAMP Rated



TRIAC



Dimming




DALI



Intertek

SILENTIUM 3.5 MULTI WALL WASH

Driver Details:

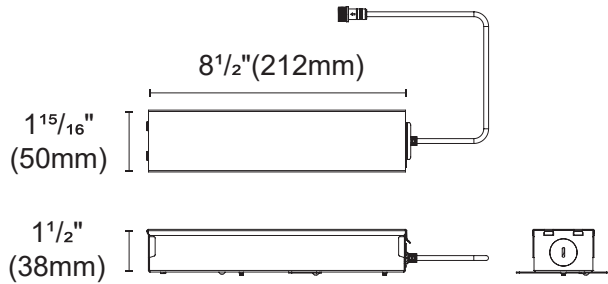


22B-PUP20A-1WMC
 22B-PUP20D-1WMC
 22B-PUP20T-1LMC

0/1-10V
 DALI
 TRIAC

Internal space dimension:

L 8 1/4" (209mm) X W 1 7/8" (48mm) X H 1 5/16" (33mm)

* Suitable for 14-21W

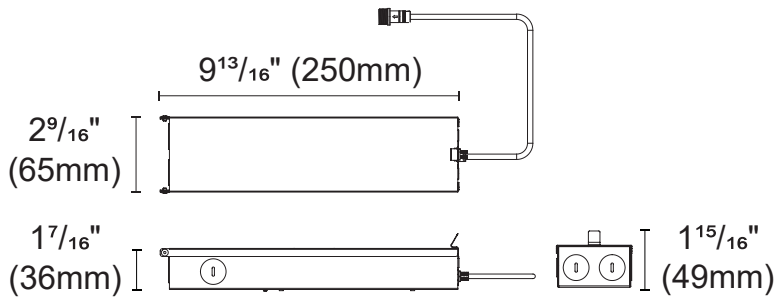

16B-PUP40A-1WMC-850
 16B-PUP40D-1WMC-850
 16B-PUP40T-1LMC-850

0/1-10V
 DALI
 TRIAC


Internal space dimension:

L 9 13/16" (250mm) X W 2 1/2" (64mm) X H 1 5/16" (34mm)

* Suitable for 25-30W

SILENTIUM 3.5 MULTI WALL WASH

Driver Details:

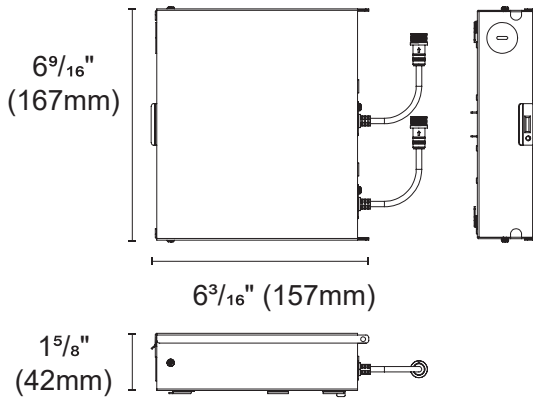


32B-PUP20A-1WMC 0/1-10V
 32B-PUP20D-1WMC DALI
 32B-PUP20T-1LMC TRIAC

* Suitable for two light - 14-21W

32B-PUP40A-1WMC-850 0/1-10V
 32B-PUP40D-1WMC-850 DALI
 32B-PUP40T-1LMC-850 TRIAC

* Suitable for two light - 25-30W

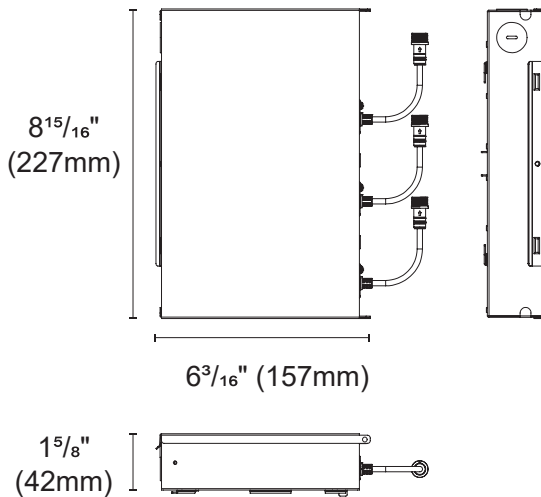

33B-PUP20A-1WMC 0/1-10V
 33B-PUP20D-1WMC DALI
 33B-PUP20T-1LMC TRIAC

* Suitable for three light - 14-21W

33B-PUP40A-1WMC-850 0/1-10V
 33B-PUP40D-1WMC-850 DALI
 33B-PUP40T-1LMC-850 TRIAC

* Suitable for three light - 25-30W



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek

SILENTIUM 3.5 MULTI WALL WASH

Technical Details:

Material	Aluminium
Trim Options	Trim / Trimless
Trim Style	Adjustable
Trim Finish	White / Black
Lumens	Upto 1497lm Non IC And 1184lm IC Rated
Wattage	14W / 18W / 21W / 25W / 30W
No. Of Lights	1 Light / 2 Light / 3 Light
Efficacy	49 Lm/W
UGR	<16
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K / DTW
Beam Angle	Wall Wash
Dimming	TRIAC / 0-10V / DALI
Voltage	120V / 120-277V
Life expectancy	LM 80 > 66,000 Hrs. / LM 70 > 66,000 Hrs.
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Housing	Non IC Rated / IC Rated / Remodel
Certification	ETL LISTED / DAMP RATED



Warranty



DAMP Rated



TRIAC



Dimming



DALI



Intertek