

Type:_____ Qty:_____

Project:_____




HELIUM LYTE

LUMINARA ADJUSTABLE

Adjustable Baffle Trim Recessed Downlight



Adjustable Baffle Trimless Recessed Downlight

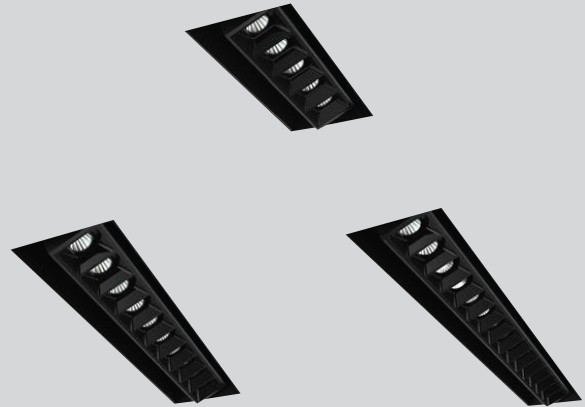

Design Features:

- Introducing Luminara, a cutting-edge downlight that seamlessly fits into the Inspira and Silentium family. Designed with advanced high-power LED technology and a precision-engineered low-glare baffle, Luminara combines comfort with architectural finesse. Its elegant circular design ensures consistent, anti-glare illumination, making it the perfect choice for both primary and decorative lighting needs. Luminara's sophisticated aesthetic enhances upscale interiors, from offices and restaurants to hotels, luxury boutiques, and residential spaces, bringing unparalleled light quality and architectural elegance to every environment.
- Made with high powered BRIDGELUX led chip that maintains high lumens per watt with 90+ CRI.
- Available in both TRIAC and 0-10v dimming.
- Standard remodel installation, new construction housing available.
- IC Rated Housing Available up to 28W.
- Extruded aluminium heat sink ensures optimal heat dissipation and LED life.
- 5 Year warranty.



Warranty



Damp Rated



TRIAC



Dimming



Intertek



LUMINARA ADJUSTABLE

Specs Code:

FIXTURE ID 1	FLANGE 2	NO. OF LIGHT - LUMENS - WATTAGE 3		TRIM FINISH 4
Luminara Adjustable LUMINARA-AD	Trim TR Trimless TRL	5 Light - 679Lumens / 12 Watt 5L-L679/12W 10 Light - 1370Lumens / 21 Watt 10L-L1370/21W 15 Light - 1969Lumens / 28 Watt 15L-L1969/28W		White WH Black BLK
BAFFLE FINISH 5	LED OPTION 6	BEAM ANGLE 7	DIMMING 8	HOUSING 9
White WH Black BLK Crome CR Rose Gold RG Gold G	2700K 27K 3000K 30K 3500K 35K 4000K 40K	15 Degree 15D 30 Degree 30D 40 Degree 40D	TRIAC TRIAC 0-10V DMV	New Construction NC Remodel RMOD
VOLTAGE 10				
120V 120V 120-277V UNV				

* Please Refer The Lighting Chart For Lumens Per Light.

Order Guide:

1	2	3	4	5	6
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
7	8	9	10		
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>		

*Example : LUMINARA-AD-TR-5L-L679/12W-WH-BLK-27K-15D-TRIAC-NC-UNV



Warranty



Damp Rated



TRIAC



Dimming





Intertek

LUMINARA ADJUSTABLE


Product Details:


Adjustable Baffle Trim Recessed Downlight

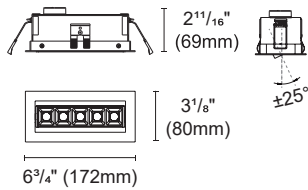



 Cut out : 2²⁴/₃₂"X6¹⁰/₃₂" (70X160mm)


Adjustable Baffle Trimless Recessed Downlight

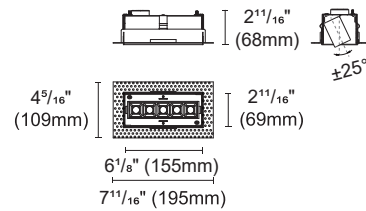



 Cut out : 3²/₃₂"X6²⁰/₃₂" (78X168mm)

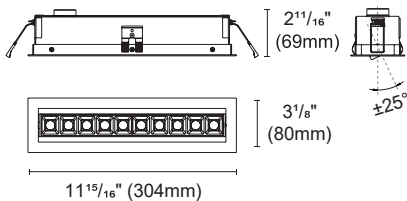


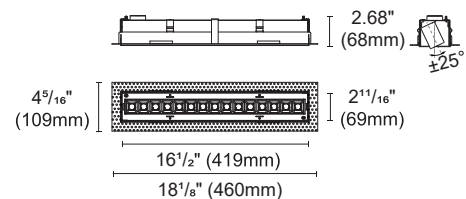
 Cut out : 2²⁴/₃₂"X11¹⁷/₃₂" (70X293mm)

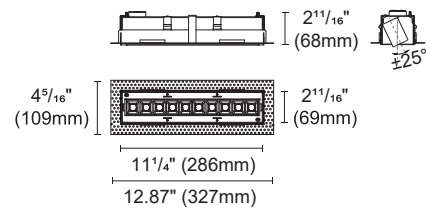


 Cut out : 3²/₃₂"X11²⁶/₃₂" (78X300mm)

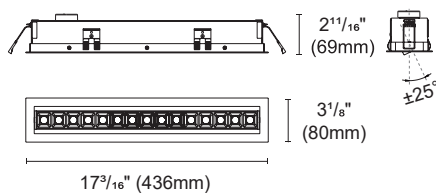

 Cut out : 2²⁴/₃₂"X16²³/₃₂" (70X425mm)



 Cut out : 3²/₃₂"X17²/₃₂" (78X433mm)




KANO ADJUSTABLE

Product Details:

New Construction Plate for Trim


ACCG-25-69x272

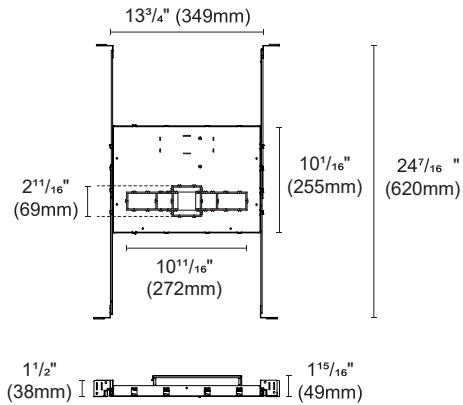

-for 5 Light / 10 Light

New Construction Plate for Trimless


ACCG-25-75X284

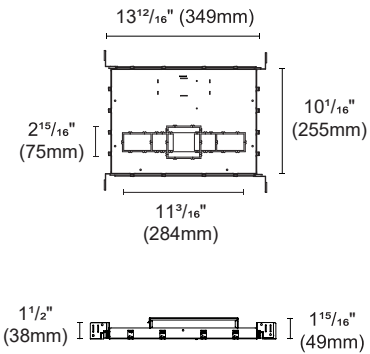

-for 5 Light / 10 Light

New Construction Plate for Trim


ACCH-1-70x426

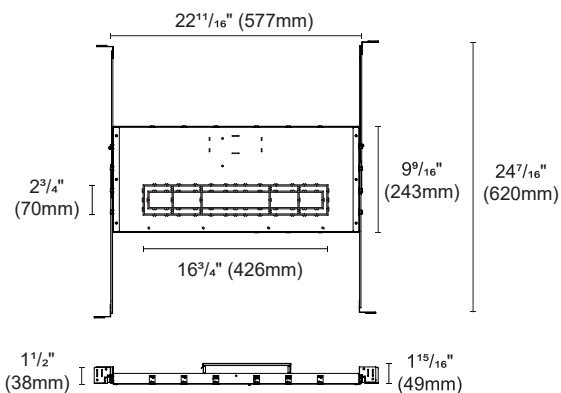

-for 15 Light

New Construction Plate for Trimless

ACCH-1-78X432

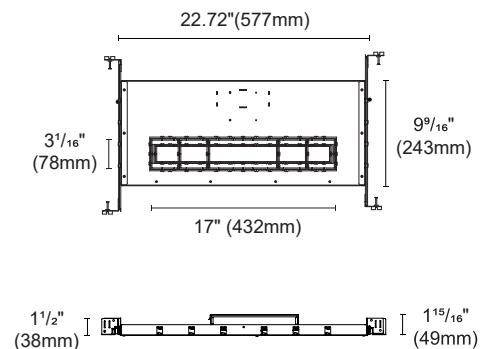


-for 15 Light




LUMINARA ADJUSTABLE


Mounting Details:

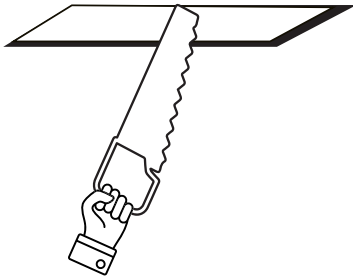


1. Cutting a mounting hole in the ceiling.

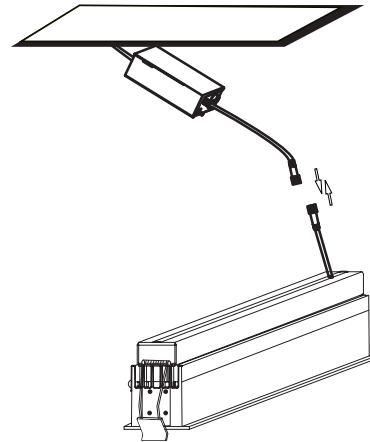

1. Connect to the driver.

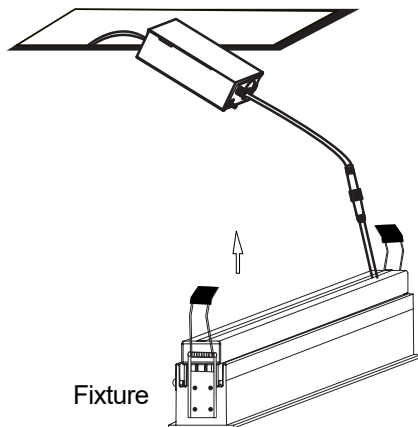

3. Completing the installation by pushing the fixture into the mounting hole.



4. Finish the installation, turn on the power.



Warranty



Damp Rated



TRIAC



Dimming




Intertek

LUMINARA ADJUSTABLE


Photometric:

Adjustable -12W-15D

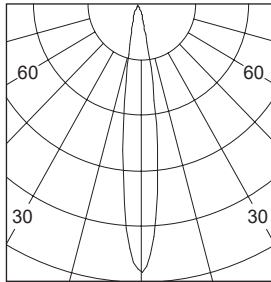


h(m)	D(m)	E(lx)
15°		
1.0	0.25	7253
2.0	0.51	1813
3.0	0.77	805
4.0	1.03	453
5.0	1.29	290

Adjustable -21W-15D

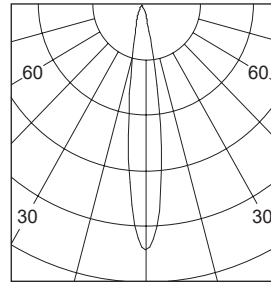

h(m)	D(m)	E(lx)
15°		
1.0	0.26	13320
2.0	0.53	3330
3.0	0.80	1480
4.0	1.07	832
5.0	1.34	532

Adjustable -28W-15D

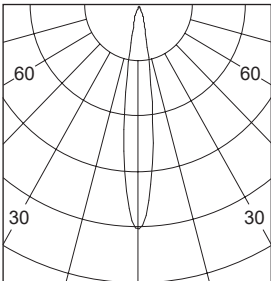

h(m)	D(m)	E(lx)
15°		
1.0	0.26	20159
2.0	0.52	5040
3.0	0.78	2240
4.0	1.04	1260
5.0	1.30	806

Lighting Chart:


WATT	LUMENS	CCT	CRI
12W	679 lm	3000K	CRI90
21W	1370 lm	3000K	CRI90
28W	1969 lm	3000K	CRI90





LUMINARA ADJUSTABLE

Driver Details:

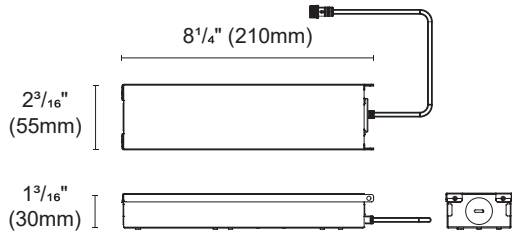

Inside: L $7\frac{7}{8}"$ (200mm) X W $2\frac{1}{16}"$ (53mm) X H $1\frac{1}{16}"$ (27mm)

Type: Gear box and Driver

ACCG-20A-LBS12W-16-C0600-RD -for 5 Light

ACCG-20A-LBS30W-42-C0600-RD -for 10 Light

ACCG-20A-LBS30W-48-C0550-RD -for 15 Light

0-10V



Warranty



Damp Rated



TRIAC



Dimming



Intertek

LUMINARA ADJUSTABLE

Technical Details:

Material	Aluminium
Trim Options	Trim / Trimless
Trim Style	Adjustable
Trim Finish	White / Black
Lumens	Upto 1969lm
Wattage	12W / 21W / 28W
Efficacy	70 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	15° / 30° / 45°
Dimming	TRIAC / 0-10V
Voltage	120V / 120-277V
Life expectancy	LM 80 > 66,000 Hrs. / LM 70 > 66,000 Hrs.
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Housing	Non IC Rated / Remodel
Certification	ETL LISTED / DAMP RATED

