

Type:\_\_\_\_\_ Qty:\_\_\_\_\_


Project:\_\_\_\_\_




HELIUM LYTE

# LUMINARA WALL WASH

Adjustable Baffle Trim Recessed Wall wash

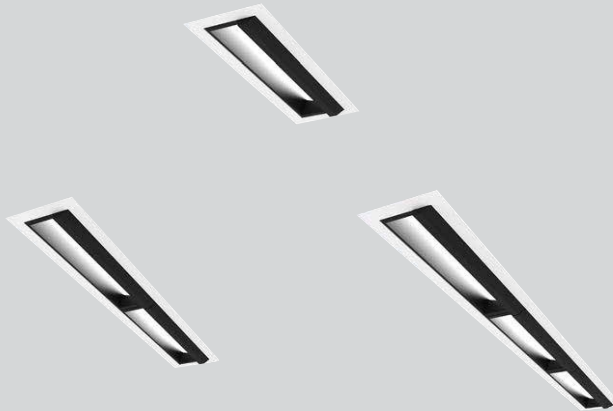

Adjustable Baffle Trimless Recessed Wall wash

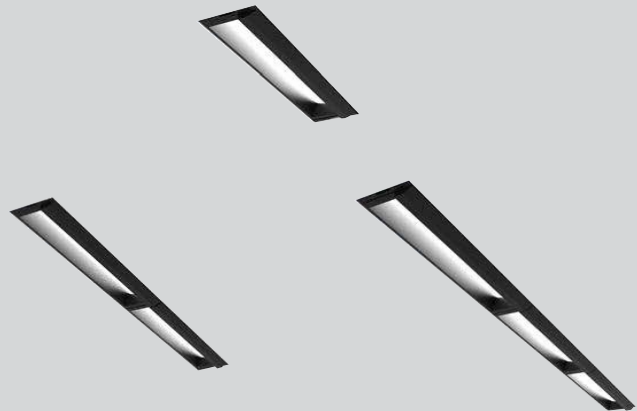

## Design Features:

- Introducing Luminara, a cutting-edge downlight that seamlessly fits into the Inspira and Silentium family. designed with advanced high-power LED technology and a precision-engineered low-glare baffle, Luminara combines comfort with architectural finesse. Its elegant circular design ensures consistent, anti-glare illumination, making it the perfect choice for both primary and decorative lighting needs. Luminara's sophisticated aesthetic enhances upscale interiors, from offices and restaurants to hotels, luxury boutiques, and residential spaces, bringing unparalleled light quality and architectural elegance to every environment.
- Made with high powered BRIDGELUX led chip that maintains high lumens per watt with 90+ CRI.
- Available in both TRIAC and 0-10v dimming.
- Standard remodel installation, new construction housing available.
- Extruded aluminium heat sink ensures optimal heat dissipation and LED life.
- 5 Year warranty.



Warranty



Damp Rated



TRIAC



Dimming



Intertek

# LUMINARA WALL WASH

Specs Code:

FIXTURE ID <b>1</b>	FLANGE <b>2</b>	NO. OF LIGHT - LUMENS - WATTAGE <b>3</b>		TRIM FINISH <b>4</b>
Luminara Wall Wash <b>LUMINARA -W</b>	Trim <b>TR</b> Trimless <b>TRL</b>	1 Light - 431Lumens / 12 Watt <b>1L-L431/12W</b> 2 Light - 834Lumens / 21 Watt <b>2L-L834/21W</b> 3 Light - 1217Lumens / 28 Watt <b>3L-L1217/28W</b>		White <b>WH</b> Black <b>BLK</b>
BAFFLE FINISH <b>5</b>	LED OPTION <b>6</b>	BEAM ANGLE <b>7</b>	DIMMING <b>8</b>	HOUSING <b>9</b>
White <b>WH</b> Black <b>BLK</b> Crome <b>CR</b> Rose Gold <b>RG</b> Gold <b>G</b>	2700K <b>27K</b> 3000K <b>30K</b> 3500K <b>35K</b> 4000K <b>40K</b>	Wall Wash <b>WW</b>	TRIAC <b>TRIAC</b> 0-10V <b>DMV</b>	New Construction <b>NC</b> Remodel <b>RMOD</b>
VOLTAGE <b>10</b>				
120V <b>120V</b> 120-277V <b>UNV</b>				

\* Please Refer The Lighting Chart For Lumens Per Light.

Order Guide:

<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>		
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>		


\*Example : LUMINARA-W-TRM-1L-L431/12W-WH-BLK27K-WW-TRIAC-NC-UNV




# LUMINARA WALL WASH


## Product Details:


### Adjustable Baffle Trim Recessed Wall Wash





 Cut out : 1<sup>17</sup>/<sub>32</sub>"X5<sup>15</sup>/<sub>32</sub>" (39X138mm)


### Adjustable Baffle Trimless Recessed Wall Wash





 Cut out : 1<sup>26</sup>/<sub>32</sub>"X6<sup>1</sup>/<sub>32</sub>" (46X153mm)

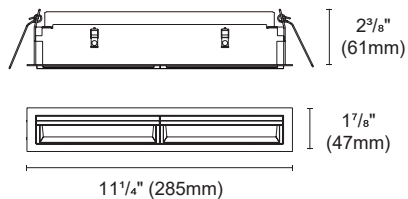


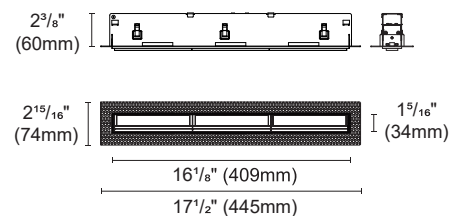
 Cut out : 1<sup>20</sup>/<sub>32</sub>"X10<sup>23</sup>/<sub>32</sub>" (41X272mm)

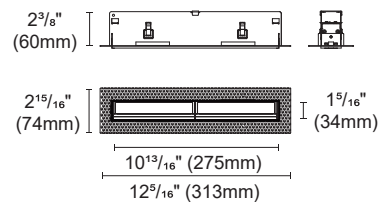


 Cut out : 1<sup>26</sup>/<sub>32</sub>"X11<sup>8</sup>/<sub>32</sub>" (46X286mm)

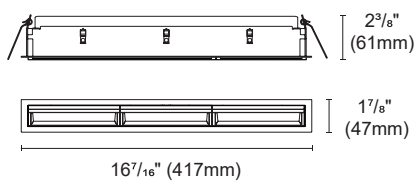

 Cut out : 1<sup>20</sup>/<sub>32</sub>"X15<sup>29</sup>/<sub>32</sub>" (41X404mm)



 Cut out : 1<sup>26</sup>/<sub>32</sub>"X16<sup>15</sup>/<sub>32</sub>" (46X418mm)




# LUMINARA WALL WASH

## Product Details:

### New Construction Plate for Trim


#### ACCG-25-69x272

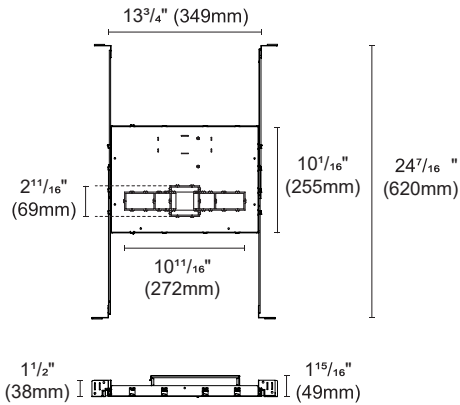

-for 1 Light / 2 Light

### New Construction Plate for Trimless


#### ACCG-25-75X284

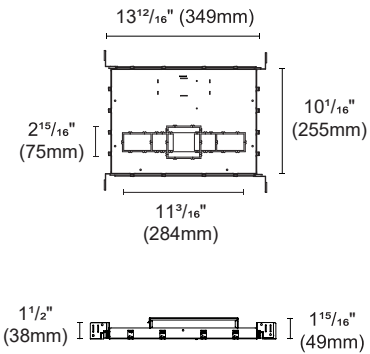

-for 1 Light / 2 Light

### New Construction Plate for Trim


#### ACCH-1-70x426

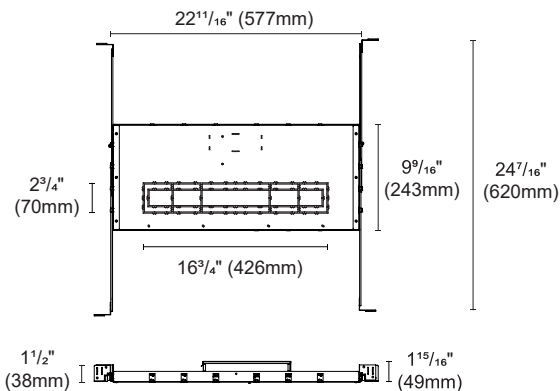

-for 3 Light

### New Construction Plate for Trimless

#### ACCH-1-78X432

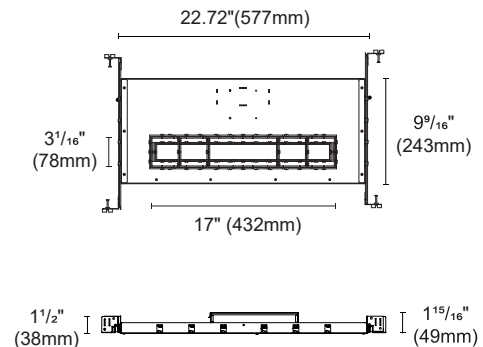


-for 3 Light




# LUMINARA WALL WASH


## Mounting Details:

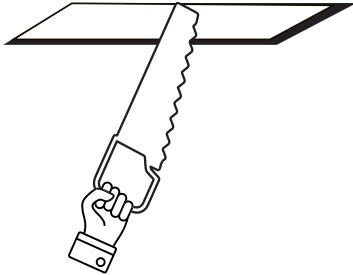


1. Cutting a mounting hole in the ceiling.

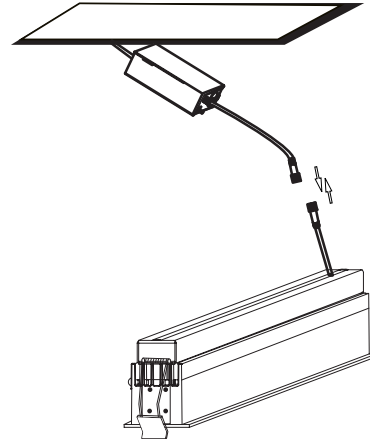

1. Connect to the driver.

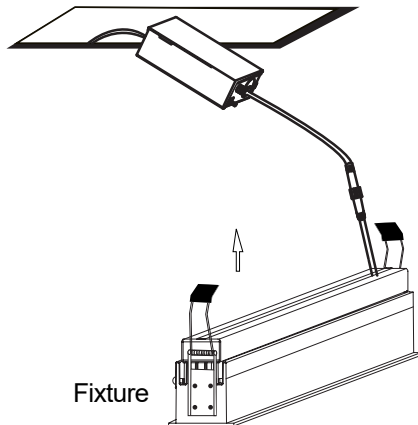

3. Completing the installation by pushing the fixture into the mounting hole.



4. Finish the installation, turn on the power.



Warranty



Damp Rated



TRIAC



Dimming




Intertek

# LUMINARA WALL WASH


## Photometric:

### Adjustable -12W-Wall Wash




h(m)	D(m)	E(lx)
Wallwash		
1.0	1.53	205
2.0	3.06	51
3.0	4.60	22
4.0	6.13	12
5.0	7.66	8

### Adjustable -21W-Wall Wash



h(m)	D(m)	E(lx)
Wallwash		
1.0	1.53	395
2.0	3.05	98
3.0	4.58	43
4.0	6.10	24
5.0	7.63	15

### Adjustable -28W-Wall Wash



h(m)	D(m)	E(lx)
Wallwash		
1.0	1.42	633
2.0	2.83	158
3.0	4.25	70
4.0	5.66	39
5.0	7.08	25

## Lighting Chart:


WATT	LUMENS	CCT	CRI
12W	679 lm	3000K	CRI90
21W	1370 lm	3000K	CRI90
28W	1969 lm	3000K	CRI90





# LUMINARA WALL WASH

## Driver Details:

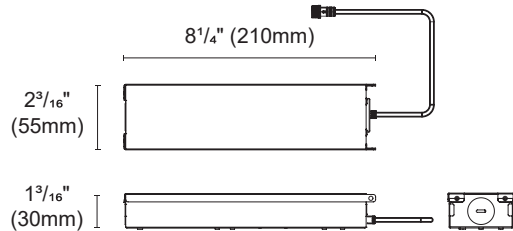

Inside: L 7<sup>7</sup>/<sub>8</sub>" (200mm)X W 2<sup>1</sup>/<sub>16</sub>" (53mm)X H 1<sup>1</sup>/<sub>16</sub>" (27mm)

Type: Gear box and Driver

**ACCG-20A-LBS12W-16-C0600-RD** -for 1 Light

**ACCG-20A-LBS30W-42-C0600-RD** -for 2 Light

**ACCG-20A-LBS30W-48-C0550-RD** -for 3 Light

0-10V



Warranty



Damp Rated



TRIAC



Dimming



Intertek

# LUMINARA WALL WASH

## Technical Details:

Material	Aluminium
Trim Options	Trim / Trimless
Trim Style	Fixed
Trim Finish	White / Black
Lumens	Upto 1217lm
Wattage	12W / 21W / 28W
Efficacy	45 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	Wall Wash
Dimming	TRIAC / 0-10V
Voltage	120V / 120-277V
Life expectancy	LM 80 > 66,000 Hrs. / LM 70 > 66,000 Hrs.
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Housing	Non IC Rated / Remodel
Certification	ETL LISTED / DAMP RATED

