

Design Features:

- Made with high powered BRIDGELUX led chip that maintains high lumens per watt with 90 +CRI / Fixture comes with both Single CCT and Dim To Warm options.
- The gimbal led heads can rotate 360 degree horizontally and tilt 30 degree.
- Integral thermal protection provided on Non-IC models to indicate improper installations.
- Available in both TRIAC and 0-10V dimming.
- LED modules and drivers are easily replaceable.
- Standard remodel installation, new construction housing available.
- Modules are IC Rated available in wattage up to 14W without additional IC box.
- Extruded aluminium heat sink ensures optimal heat dissipation and LED life.
- 5 Year warranty.













Specs Code:

FIXTURE ID 1 TRIM OPTION		2	TRIM FINISH	3	NO. OF LIGHTS / LUMENS / WATT			4	
Inspira INS	S-MULTI	Trim	TR	White	WH	1 Light - L700 / 10W			1L-L70/10W
Multi				Black	BLK	2 Light - L1400 / 20W			2L-L14/20W
				Custom	CSTM	1 3 Light - L2100 / 30W			3L-L21/30W
						4 Light - L2800 / 40	WC		3L-L28/40W
LED OPTION	5	BEAM ANGLE	6	DIMMING	7	HOUSING	8	VOLTAGE	9
2700K	27K	15 Degree	15D	TRIAC	TRIAC	New Construction	NC	120V	120V
3000K	30K	24 Degree	24D	0-10V	DMV	IC Rated Housing	IC	120-277V	UNV
3500K	35K	36 Degree	36D			Remodel F	RMOD		
4000K	40K								
5000K	50K								
Dim To Warm	DTW								

Order Guide:	1	2	3	4	5	6
	7	8	9			

*Example: INS-MULTI-TR-BLK-1L-L70/10W-40K-36D-TRIAC-NC-UNV












Warranty


Damp Rated


Dimming

Product Details:

MULTI LED - 1 Light










CUT-OUT : 3-3/4" × 3-7/8" (95mm × 98mm)

MULTI LED - 2 Light







CUT-OUT : 3-7/8" × 7-1/2" (98mm × 190mm)

*All Dimensions are milimeters (Inches) unless otherwise indicated.














Product Details:

MULTI LED - 3 Light










CUT-OUT : 3-7/8" × 10-13/16" (98mm × 275mm)

MULTI LED - 4 Light







CUT-OUT : 3-7/8" × 14-1/4" (98mm × 361 mm)

*All Dimensions are milimeters (Inches) unless otherwise indicated.













Product Details:

New construction housing plate for Multi Downlight

Part number - 503048

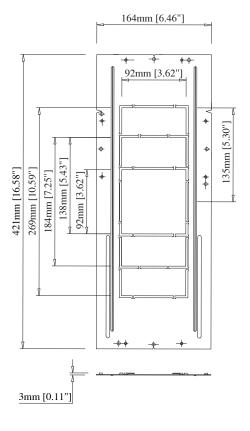
















Warranty


Damp Rated

Dimming

Photometric:

Round -10W-36D





Lighting Chart:

WATT	LUMENS	ССТ	CRI
10W	700 lm	3000K	CRI90
20W	1400 lm	3000K	CRI90
30W	2100 lm	3000K	CRI90
40W	2800 lm	3000K	CRI90











Damp Rated

Technical Details:

Material	Aluminium	
Trim Options	Trim	
Trim Style	Fixed	
Trim Finish	White / Black	
Lumens	Upto 2800lm	
No.of Light -Wattage	1L-10W / 2L-20W / 3L-30W / 4L-40W	
Efficacy	70 Lm/W	
UGR	<19	
CRI	90+	
ССТ	2700K / 3000K / 3500K / 4000K / 5000K	
	/ Dim To Warm (DTW)	
Beam Angle	15° / 24° / 36°	
Dimming	TRIAC / 0-10V	
Voltage	120V / 120-277V	
Life expectancy	LM 80 > 66,000 Hrs. / LM 70 > 66,000 Hrs.	
Operating Temp.	-20°C \sim 40°C (-4°F \sim 104°F)	
Housing	Non IC Rated / IC Rated / Remodel	
Certification	ETL LISTED / DAMP RATED	









