


INSTALLATION STRUCTURE - SHALLOW

SAFETY PRECAUTIONS :

1. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE!
2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
3. CAUTION RISK OF FIRE . CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR.
4. FOR EXTERNAL USE ONLY, RECOMMEND APPLYING WATERPROOF SILICONE TO SEAL AROUND TRIM AND CEILING.

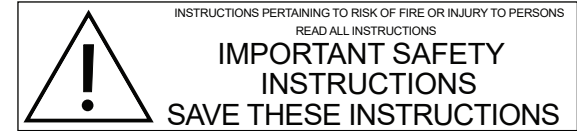

TOOLS AND MATERIALS REQUIRED:



Phillips
Screwdriver



Wire Cutters




Pliers




Wrench


Wiring supplies
as required by
the Canadian
Electrical Code
and/or the
Quebec
Electrical code

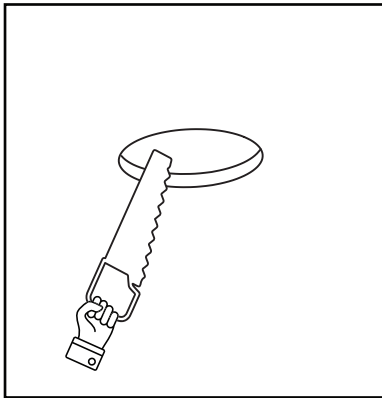


1. Cutting a mounting hole in the ceiling.

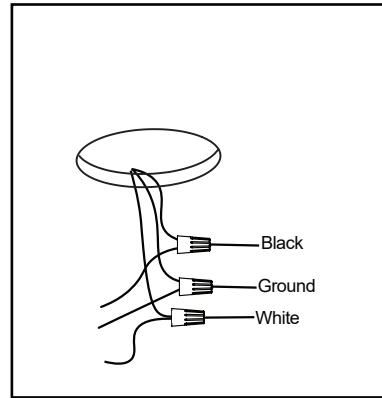

2. Connect supply wires to wires on fixture with wire nuts or push wires into Quick Connector. Connect white to white, black to black, and copper wire to copper wire as grounding connection.

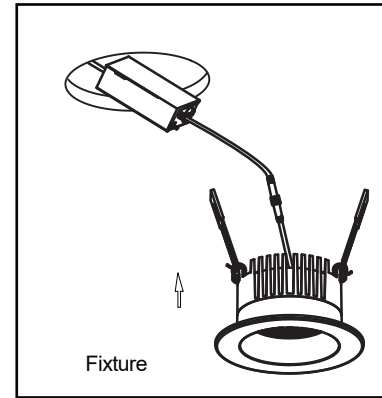

3. Completing the installation by pushing the fixture into the mounting hole.

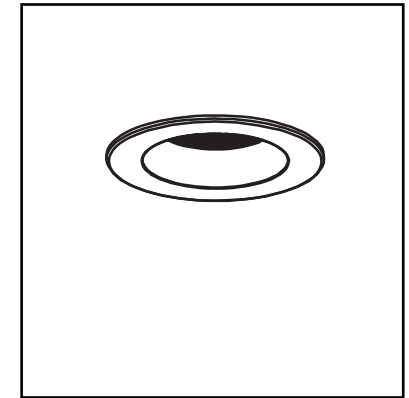

4. Finish the installation, turn on the power.