

Type:_____ Qty:_____

Project:_____



HELIUM LYTE

FLEXGLOW ROUND



Design Features:

- Made up with Aluminium Housing with Optic Grade Opal PMMA diffuser used for maximum output.
- CRI90+ up to 104lm/w.
- Can be available in Custom size, Please contact sales representative.
- Indoor Use: IP22 available.
- 5 Year warranty .



Warranty



Dimming



DALI



Intertek

FLEXGLOW ROUND

Specs Code:

FIXTURE ID 1	MOUNTING 2	SIZE 3	LED OPTION 4	DIMMING 5
Flexglow Round FLXG-RD	Surface SRF	17.7" (450mm) 04	3000K 30K	0-10V DMV
	Pendant-Type A PEN-A	24" (600mm) 06	3500K 35K	DALI DALI
	Pendant-Type B PEN-B	29.5" (750mm) 07	4000K 40K	
		36" (900mm) 09	6000K 60K	
		48" (1200mm) 12		
FINISH 6	ACOUSTIC COLOUR (OPTIONAL) 7		VOLTAGE 8	
Matt White - RAL9016 WH	Cloudy Black AC01	Ocean Blue AC06	120V 120V	
Matt Black - RAL9017 BLK	Moon Grey AC02	Navy Blue AC07	120-277V UNV	
Anodize - RAL9000 AZ	Conctete Grey AC03	Stone Blue AC08		
	Silver Grey AC04	Red AC09		
	Indigo blue AC05	Camel Brown AC10		

*Please check mounting details page for pendant mounting options.

*Please find more acoustic colour options available on last page.


Order Guide:

1	2	3	4	5	6
7	8				

*Example : FLXG-RD-PEN-06-60K-DMV-WH-NA-UNV

FLEXGLOW ROUND

Product Details:

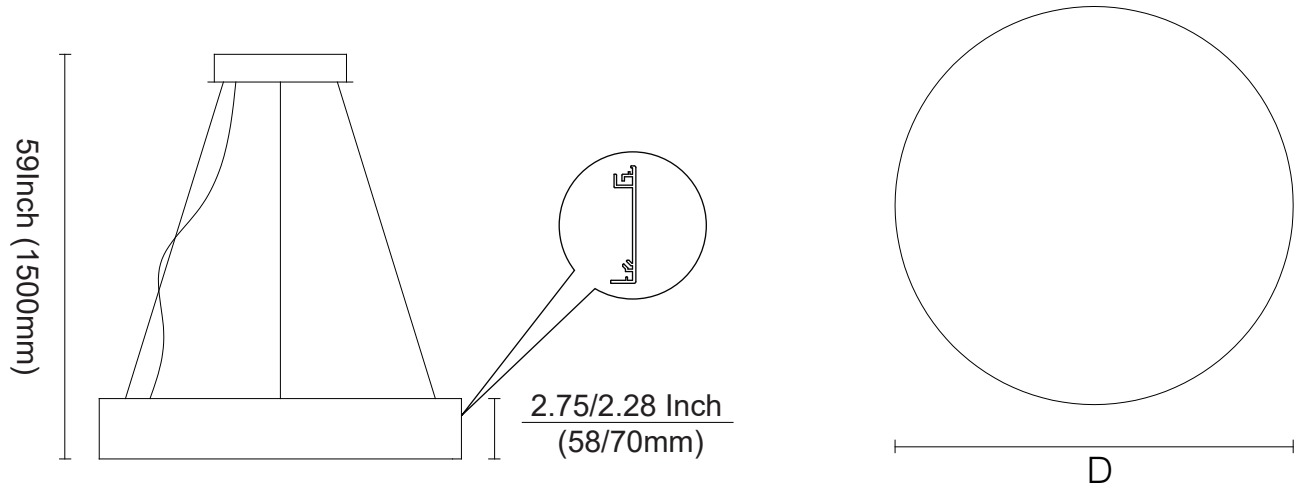

*Suspension Cable - 1.5 M Length (Standard), other lengths can be customized.

Size Chart:

SIZE	DIA (Ø)	HEIGHT (H)
04	17.7" (450mm)	4" (100mm)
06	24" (600mm)	4" (100mm)
07	29.5" (750mm)	4" (100mm)
09	36" (900mm)	4" (100mm)
12	48" (1200mm)	4" (100mm)

• Can be available in Custom size, Please contact sales representative.







FLEXGLOW ROUND

Mounting Details:

Suspended Mounting

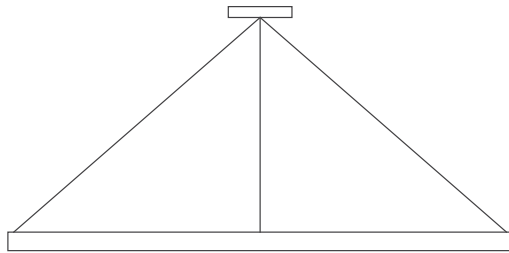

Type A (Central Axis Canopy System)

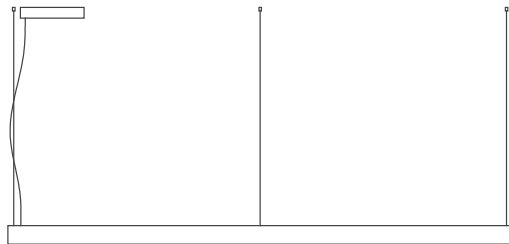

Type B (Vertical Installation System)

*
TYPE A - Mounting used for Size- 04 / 06 / 07 Fixture.
TYPE B - Mounting used for Size- 09 / 12 & Above.



FLEXGLOW ROUND

Photometric:

Lighting Chart:

SIZE	WATT	LUMENS	CCT	CRI
04	40W	3164 lm	3000K	CRI90
06	60W	4765 lm	3000K	CRI90
07	72W	6048 lm	3000K	CRI90
09	92W	9635 lm	3000K	CRI90
12	140W	12363 lm	3000K	CRI90



Warranty



Dimming



DALI



Intertek

FLEXGLOW ROUND

Technical Details:

Material	Aluminium + Optic Grade Opal PMMA diffuser
Size	Ø 17.7" X 4" (Ø 450 x 100 mm) / Ø 24" X 4" (Ø 600 x 100 mm)
	Ø 29.5" X 4" (Ø 750 x 100 mm) / Ø 36" X 4" (Ø 900 x 100 mm)
	Ø 48" X 4" (Ø 1200 x 100 mm)
Lumens	Upto 12363lm
Wattage	40W / 60W / 72W / 92W / 140W
Efficacy	Upto 88 Lm/W
CRI	90+
CCT	3000K / 3500K / 4000K / 6000K
LED	SMD2835
Beam Angle	120°
Dimming	0-10V / DALI
Voltage	120V / 120-277V
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Certification	ETL LISTED / DRY RATED

OTHER ACOUSTIC COLOUR OPTIONS:



AC11
Cocoa Brown



AC12
Maroon



AC13
Beaver



AC14
Bistre



AC15
Dark Green



AC16
Forest Green



AC17
Yellow Green



AC18
Wheat



AC19
Bisque



AC20
White Smoke



AC21
Slate Grey



AC22
Blue Violet



AC23
Light Coral



AC24
Gold



AC25
Orange Red



Warranty



Dimming



DALI



Intertek