


Type:_____ Qty:_____

Project:_____



HELIUM LYTE

FLEXGLOW HEXAGON

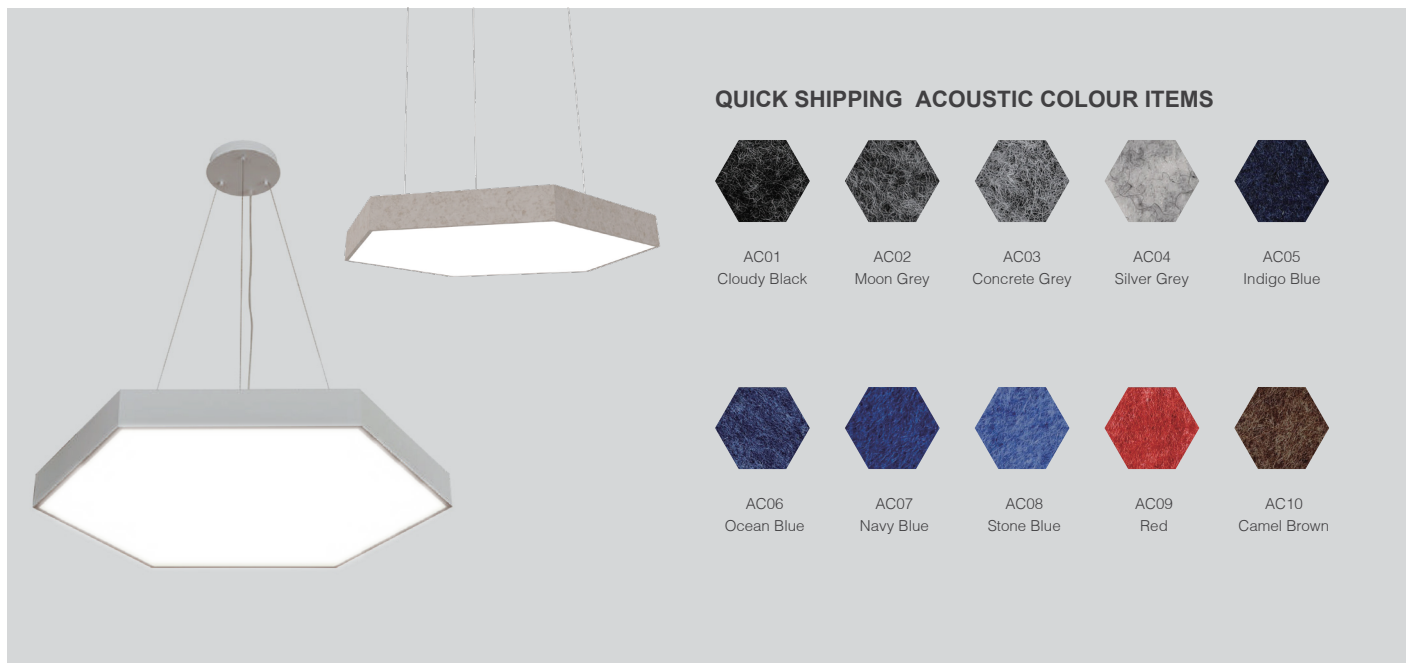

Design Features:

- Made up with Aluminium Housing with Optic Grade Opal PMMA diffuser used for maximum output.
- CRI90+ up to 87lm/w.
- Can be available in Custom size, Please contact sales representative.
- Indoor Use: IP22 available.
- 5 Year warranty .



Warranty



Dimming



DALI



Intertek



FLEXGLOW HEXAGON

Specs Code:

FIXTURE ID 1	MOUNTING 2	SIZE 3	LED OPTION 4	DIMMING 5
Flexglow Hexagon FLXG-HX	Surface SRF	29.3" (745mm) 07	3000K 30K	0-10V DMV
	Pendant-Type A [*] PEN-A	48" (1200mm) 12	3500K 35K	DALI DALI
	Pendant-Type B [*] PEN-B		4000K 40K	
			6000K 60K	
FINISH 6	ACOUSTIC COLOUR (OPTIONAL) [*] 7		VOLTAGE 8	
Matt White - RAL9016 WH	Cloudy Black AC01	Ocean Blue AC06	120V 120V	
Matt Black - RAL9017 BLK	Moon Grey AC02	Navy Blue AC07	120-277V UNV	
Anodize - RAL9000 AZ	Conctete Grey AC03	Stone Blue AC08		
	Silver Grey AC04	Red AC09		
	Indigo blue AC05	Camel Brown AC10		

^{*}Please check mounting details page for pendant mounting options.

^{*}Please find more acoustic colour options available on last page.

Order Guide:

1	2	3	4	5	6
7	8				


*Example : FLXG-HX-PEN-12-60K-DMV-WH-NA-UNV





FLEXGLOW HEXAGON

Product Details:

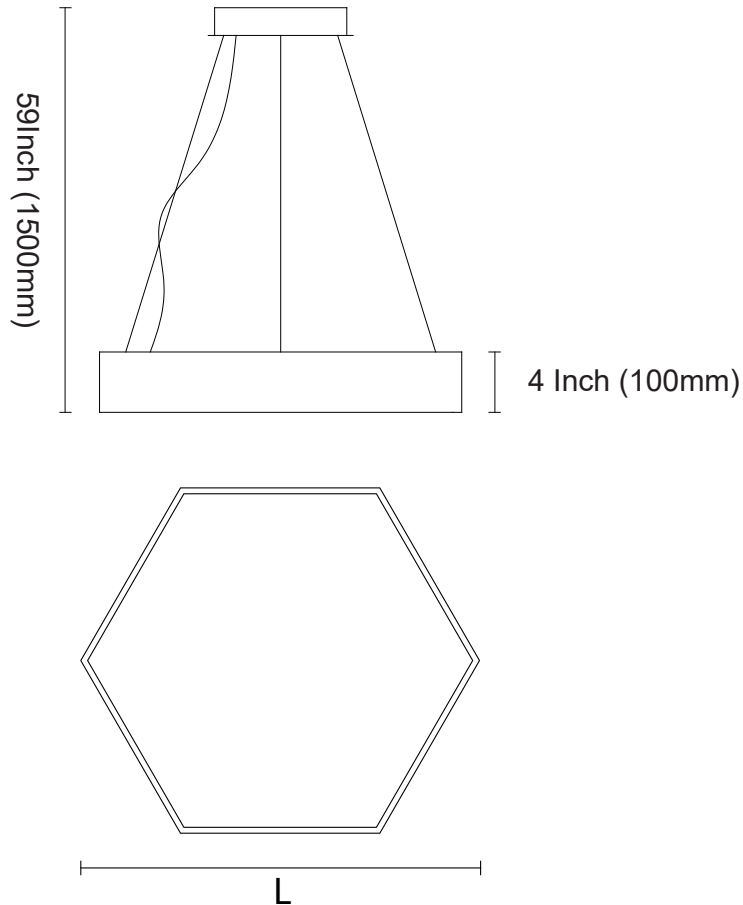

*Suspension Cable - 1.5 M Length (Standard), other lengths can be customized.

Size Chart:

SIZE	LENGTH (L)	WIDTH (W)	HEIGHT (H)
07	29.3" (745mm)	29.3" (745mm)	4" (100mm)
12	48" (1200mm)	48" (1200mm)	4" (100mm)

• Can be available in Custom size, Please contact sales representative.



Warranty



Dimming



DALI




Intertek




FLEXGLOW HEXAGON

Mounting Details:

Suspended Mounting

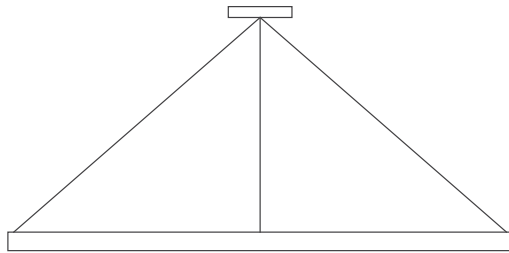

Type A (Central Axis Canopy System)

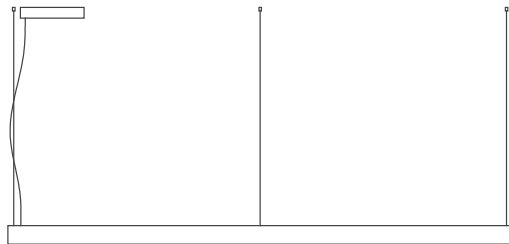

Type B (Vertical Installation System)

*
TYPE A - Mounting used for Size-07 Fixture.
TYPE B - Mounting used for Size-12 & Above.



Warranty



Dimming



DALI



Intertek



FLEXGLOW HEXAGON

Photometric:



Lighting Chart:

SIZE	WATT	LUMENS	CCT	CRI
07	72W	6312 lm	3000K	CRI90
12	142W	12365 lm	3000K	CRI90



Warranty



Dimming



DALI



Intertek



FLEXGLOW HEXAGON

Remote Driver Details:



Warranty



Dimming



DALI



Intertek

FLEXGLOW HEXAGON

Technical Details:

Material	Aluminium + Optic Grade Opal PMMA diffuser
Size	29.3" X 29.3" X 4" (745 x 745 x 100 mm)
	48" X 48" X 4" (1200 x 1200 x 100 mm)
Lumens	Upto 12365lm
Wattage	72W / 142W
Efficacy	Upto 88 Lm/W
CRI	90+
CCT	3000K / 3500K / 4000K / 6000K
LED	SMD2835
Beam Angle	120°
Dimming	0-10V / DALI
Voltage	120V / 120-277V
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Certification	ETL LISTED / DRY RATED

OTHER COLOUR OPTIONS:

