


Type:_____ Qty:_____

Project:_____



HELIUM LYTE

LIN-GA/LG

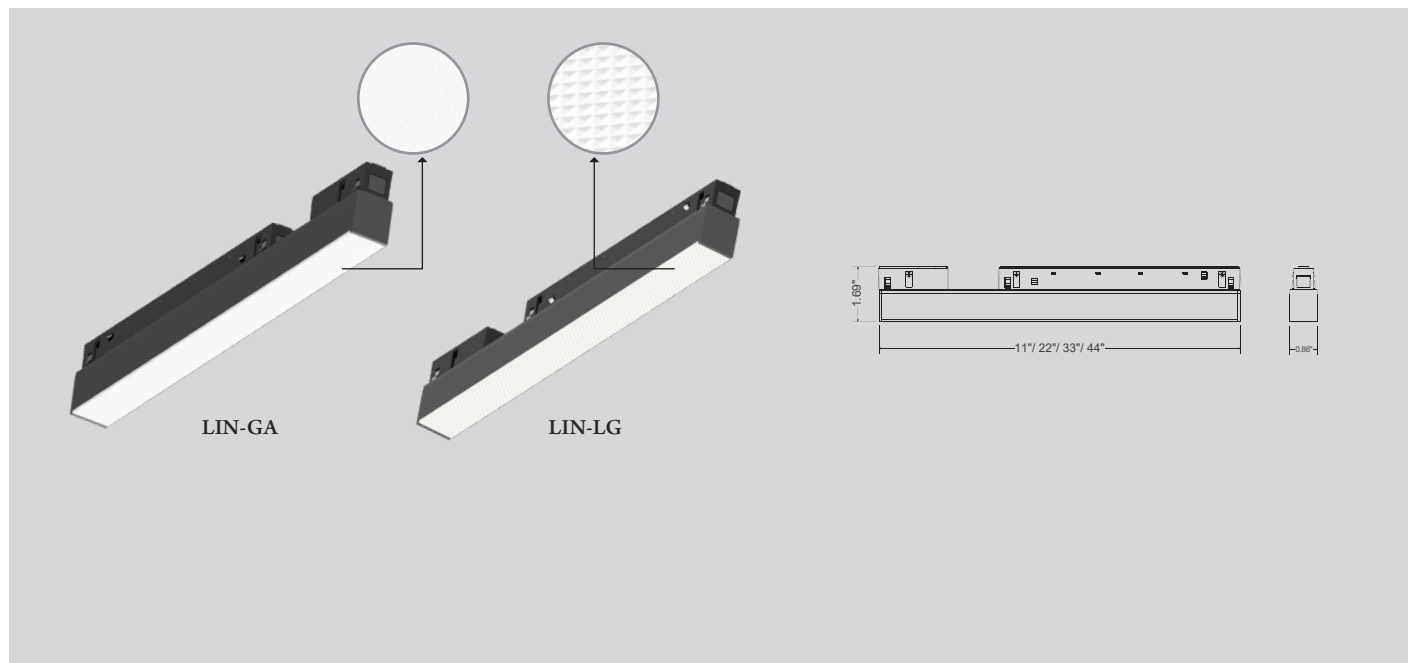

Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered SAMSUNG led chip that maintains high lumens per watt.
- Available with 65°/ 110° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.



Warranty



Dimming



DALI



Intertek



LIN-GA/LG



*Ref. Image

Specs Code:

FIXTURE ID 1		LUMENS / WATT 2				LED OPTION 3		DIMMING 4	
LIN-GA	LINGA	L400/7W	L40/7W	L380/7W	L38/7W	2700K	27K	0-10V	DMV
LIN-LG	LINLG	L800/13W	L80/13W	L750/13W	L75/13W	3000K	30K	DALI	DALI
		L1200/19W	L120/19W	L1100/19W	L110/19W	3500K	35K		
		L1600/26W	L160/26W	L1500/26W	L150/26W	4000K	40K		
		-Above for LIN-GA		-Above for LIN-LG					
BEAM ANGLE 5		FIXTURE LENGTH 6		FINISH 7		ACCESSORIES 8			
65 Degree	65D	7W -11 Inch	11IN	White	WH	Not Applicable	NA		
110 Degree	110D	13W -22 Inch	22IN	Black	BLK				
		19W -33 Inch	33IN						
		26W -44 Inch	44IN						

Ordering Code:

1	2	3	4	5	6
7	8				

*Example : LINGA-L40/7W-27K-DMV-65D-22IN-BLK-NA



Warranty



Dimming




DALI



Intertek

LIN-GA/LG


Mounting Details:

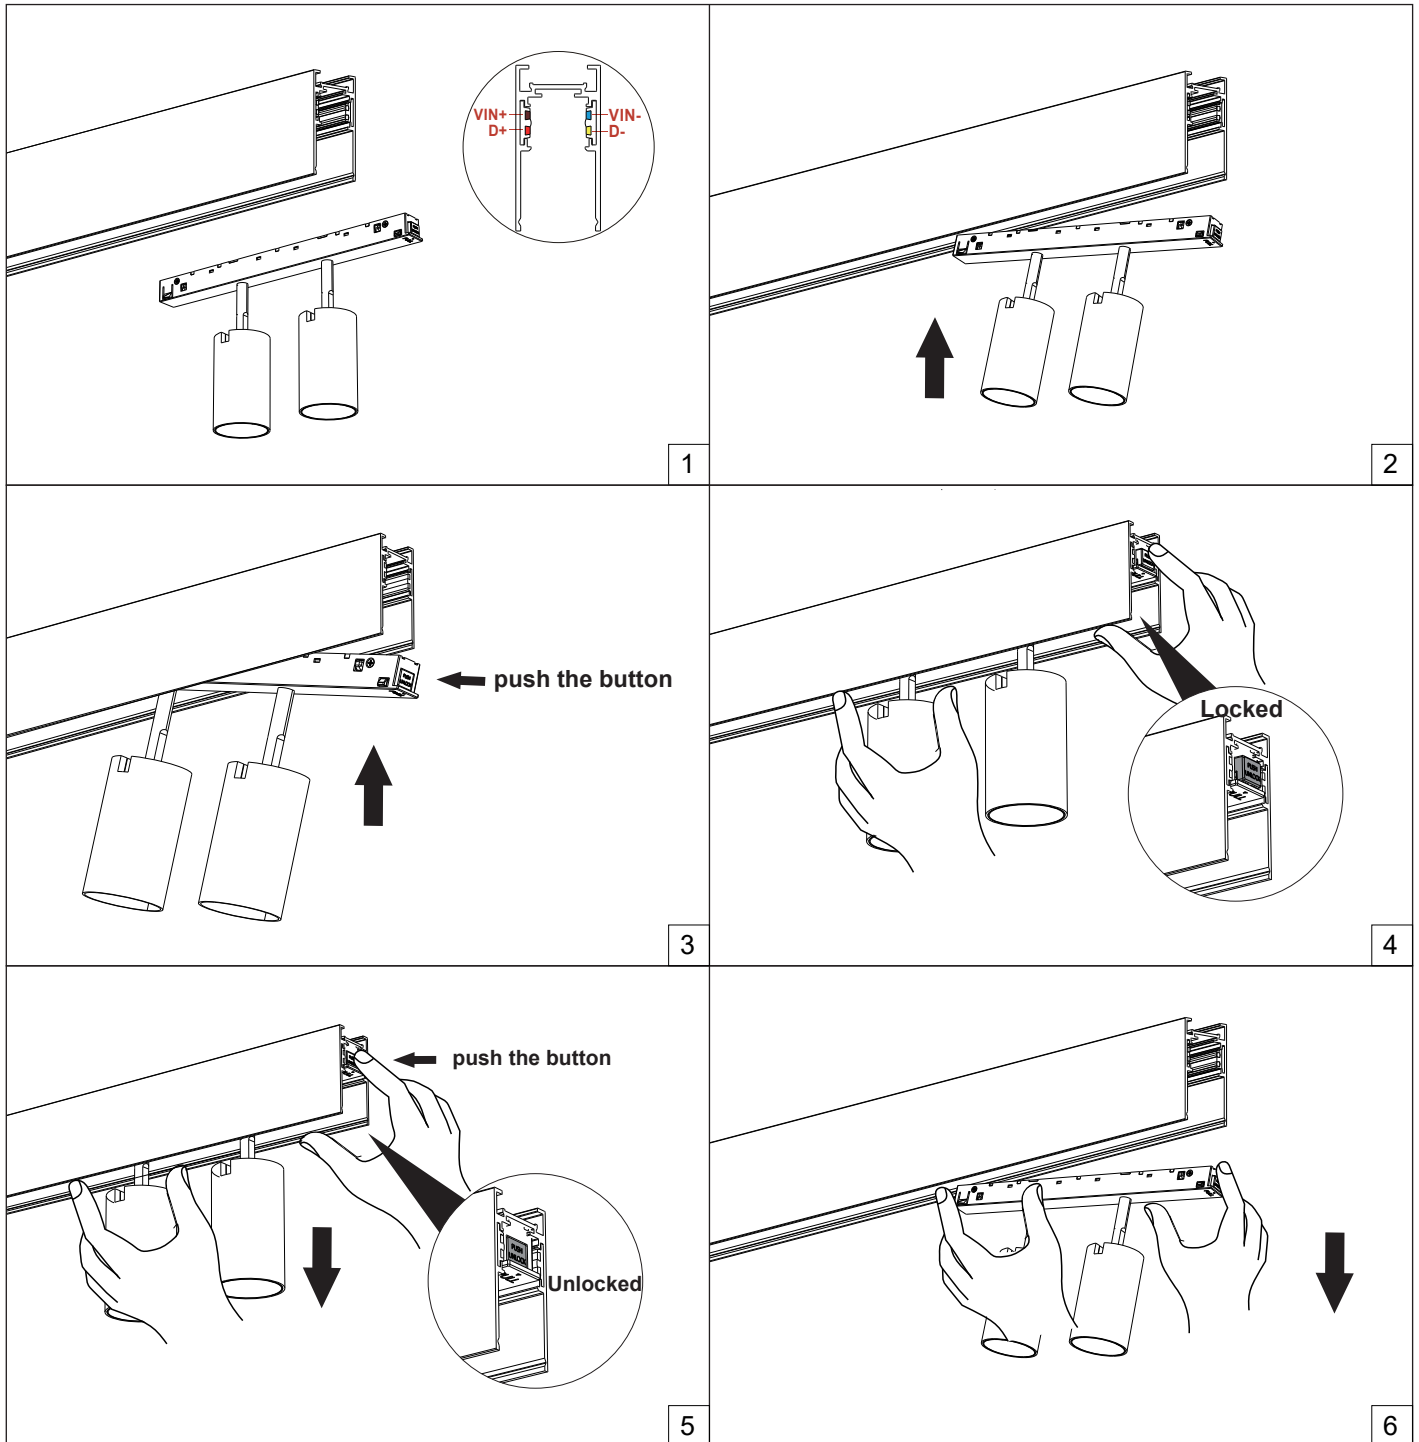


LIN-GA/LG

Photometric:

07W-65D

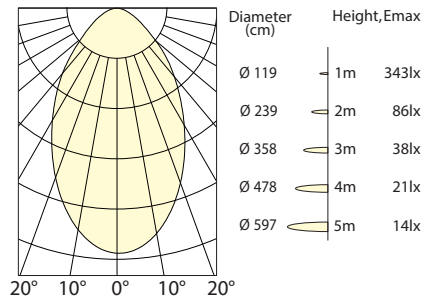

07W-110D

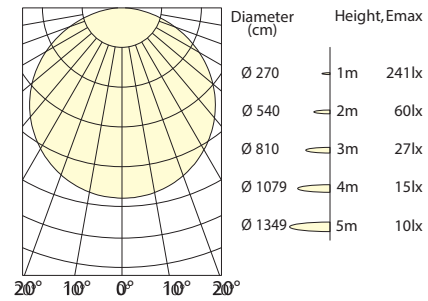

Lighting Chart:

WATT	LUMENS-GA	LUMENS-LG	CCT	CRI
07W	400 lm	380 lm	3000K	CRI90
13W	800 lm	750 lm	3000K	CRI90
19W	1200 lm	1100 lm	3000K	CRI90
26W	1600 lm	1500 lm	3000K	CRI90





LIN-GA/LG

Technical Details:

Material	Extruded Aluminium
Head Style	Fixed
Trim Finish	White / Black
Lumens	Upto 1600lm
Wattage	07W / 13W / 19W / 26W
Efficacy	62 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	65° / 110°
Dimming	DALI / 0-10V
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Voltage	120V / 120-277V
Housing	Non IC Rated / IC Rated
Certification	ETL LISTED / DRY RATED



Warranty



Dimming



DALI



Intertek