


Type: _____ Qty: _____

Project: _____



HELIUM LYTE

SPOT 12

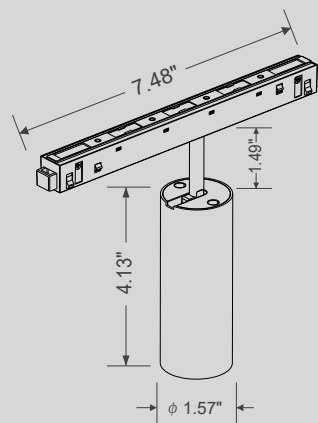

Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered CITIZEN led chip that maintains high lumens per watt.
- Available with 18°/ 30°/ 45° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.



Warranty



Dimming



DALI



Intertek

SPOT 12



*Ref. Image

Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5
SPOT-12 SPOT12	L750/12W L75/12W -For 18° & 30° L600/12W L60/12W -For 45°	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	18 Degree 18D 30 Degree 30D 45 Degree 45D
FINISH 6	ACCESSORIES 7			
White WH Black BLK	Not Applicable NA			

Ordering Code:

1

2

3

4

5

6


7

*Example : SPOT12-L75/12W-27K-DMV-30D-BLK-NA



SPOT 12


Mounting Details:

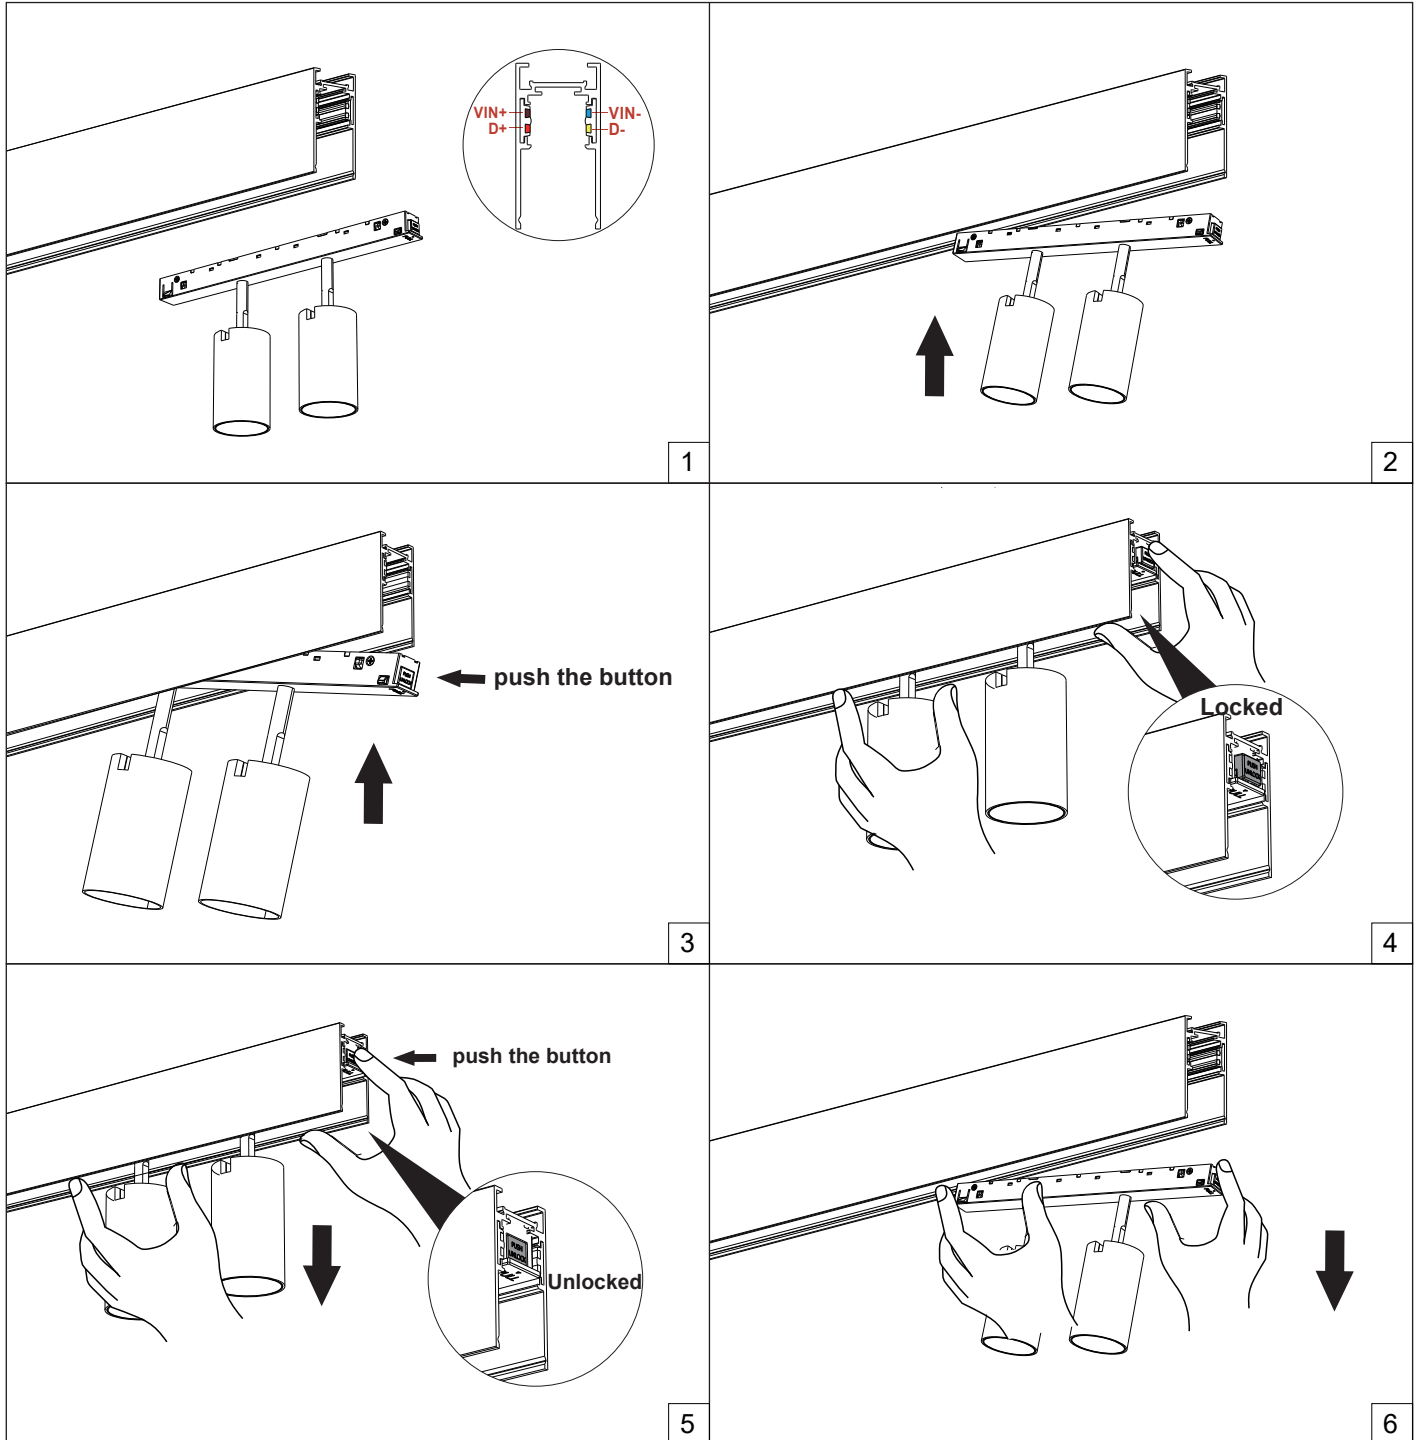


SPOT 12

Photometric:


12W-18D

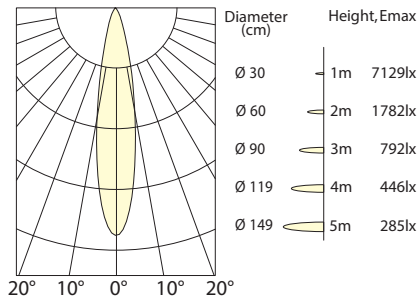

12W-30D

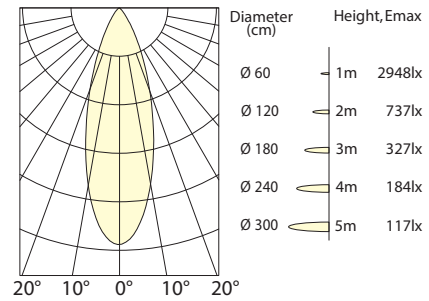

12W-45D

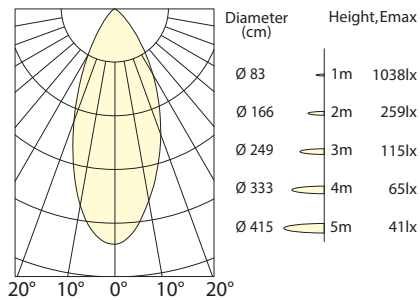

Lighting Chart:

WATT	LUMENS	CCT	CRI
12W	600 lm	3000K	CRI90





SPOT 12

Technical Details:

Material	Aluminium
Head Style	Adjustable
Trim Finish	White / Black
Lumens	Upto 600lm
Wattage	12W
Efficacy	50 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	18° / 30° / 45°
Dimming	DALI / 0-10V
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Voltage	120V / 120-277V
Housing	Non IC Rated / IC Rated
Certification	ETL LISTED / DRY RATED



Warranty



Dimming



DALI



Intertek