


Type:_____ Qty:_____

Project:_____



HELIUM LYTE

SPOT CYLINDRICAL PENDANT 12

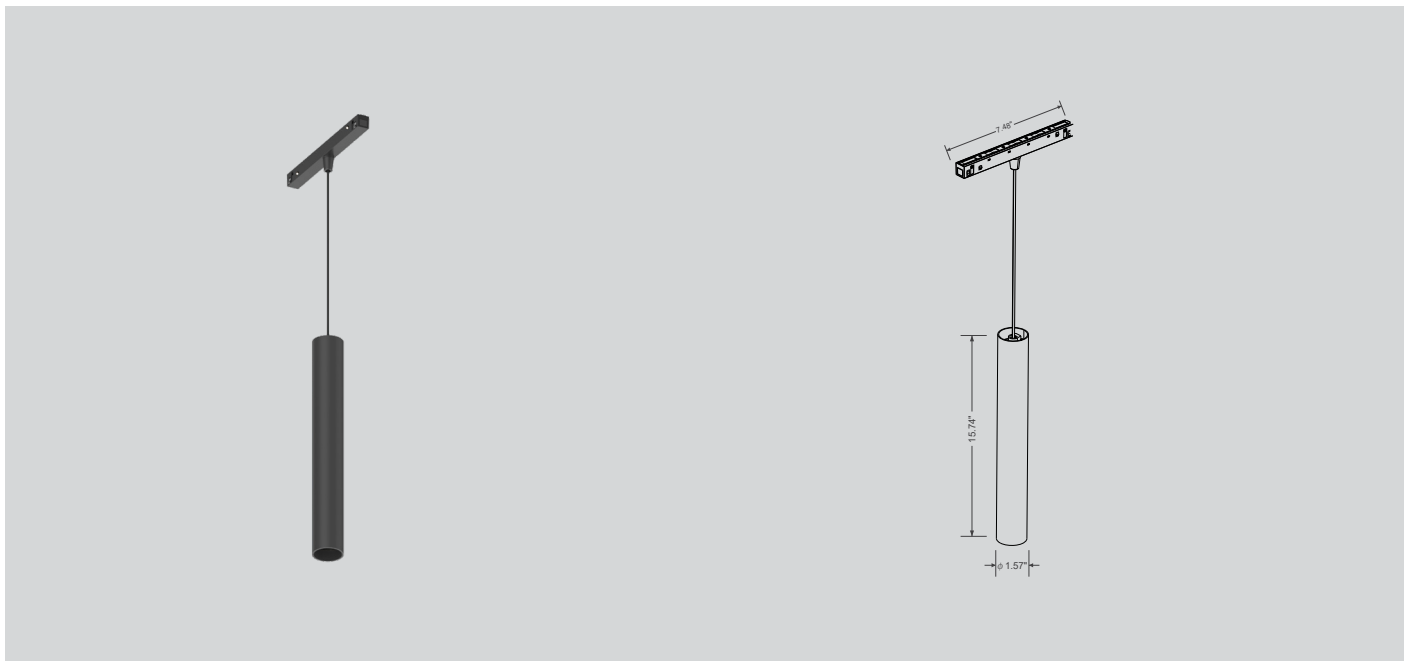

Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered CITIZEN led chip that maintains high lumens per watt.
- Available with 18°/ 30°/ 45° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.



Warranty



Dimming



DALI



Intertek

SPOT CYLINDRICAL PENDANT 12



*Ref. Image

Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5
SPOT CYLINDRICAL PENDANT-12 CYL-12	L750/12W -For 18° & 30°	L75/12W	2700K	27K
			3000K	30K
	L600/12W -For 45°	L60/12W	3500K	35K
			4000K	40K
0-10V	DMV	18 Degree	18D	
DALI	DALI	30 Degree	30D	
		45 Degree	45D	
FINISH 6	ACCESSORIES 7			
White Black	WH BLK	Not Applicable NA		

Ordering Code:

1
2
3
4
5
6


7

*Example : SPOT12-L75/12W-27K-DMV-30D-BLK-NA



SPOT CYLINDRICAL PENDANT 12


Mounting Details:

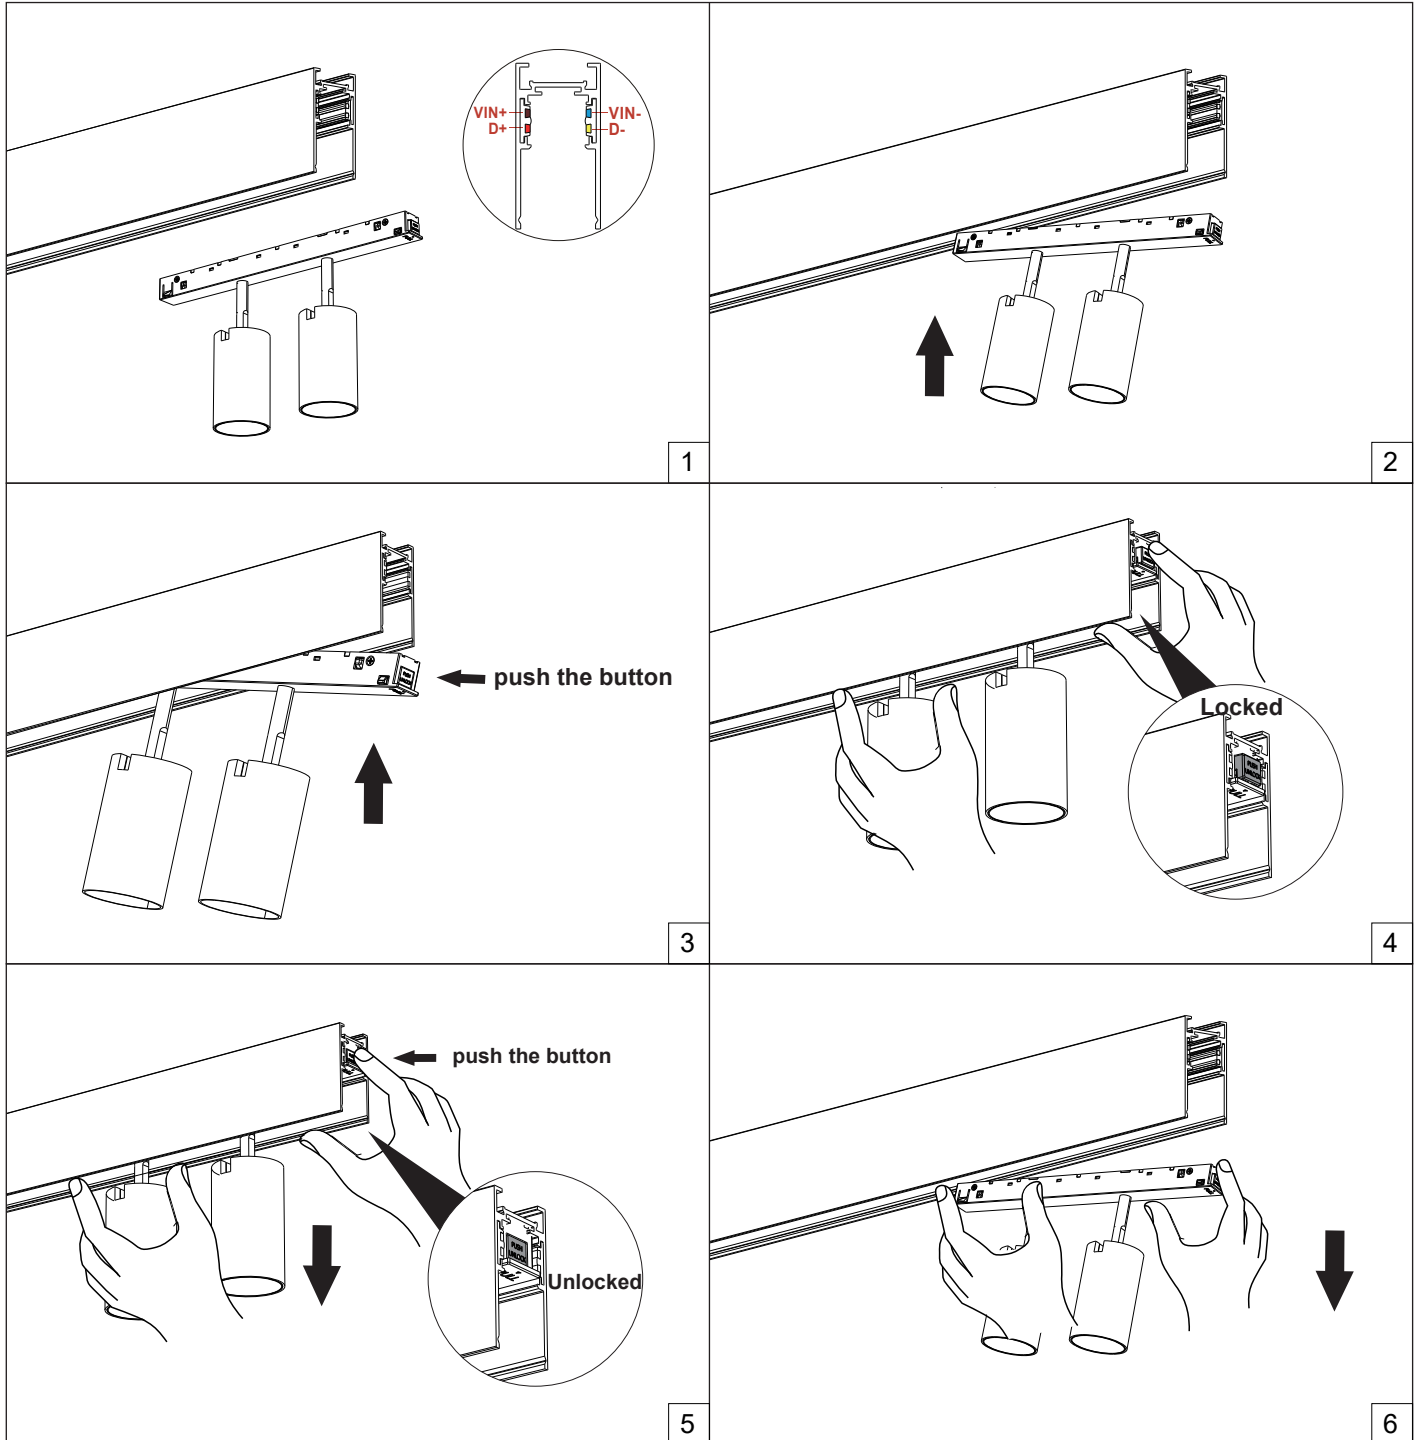


SPOT CYLINDRICAL PENDANT 12

Photometric:


12W-18D

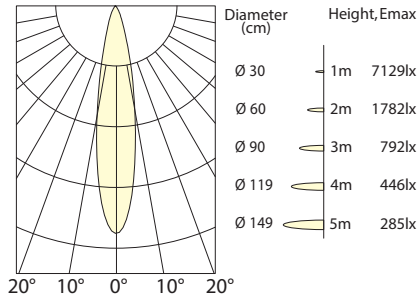

12W-30D

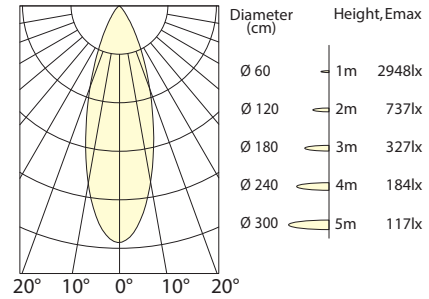

12W-45D

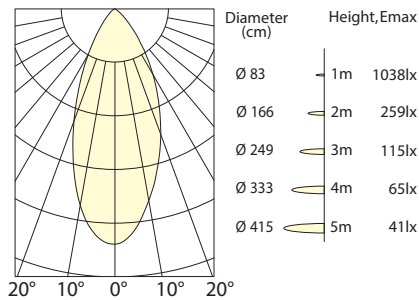

Lighting Chart:

WATT	LUMENS	CCT	CRI
12W	600 lm	3000K	CRI90



SPOT CYLINDRICAL PENDANT 12

Technical Details:

Material	Aluminium
Head Style	Adjustable
Trim Finish	White / Black
Lumens	Upto 600lm
Wattage	12W
Efficacy	50 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	18° / 30° / 45°
Dimming	DALI / 0-10V
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Voltage	120V / 120-277V
Housing	Non IC Rated / IC Rated
Certification	ETL LISTED / DRY RATED

