


Type:_____ Qty:_____

Project: _____



HELIUM LYTE

SPOT CYLINDRICAL PENDANT 14

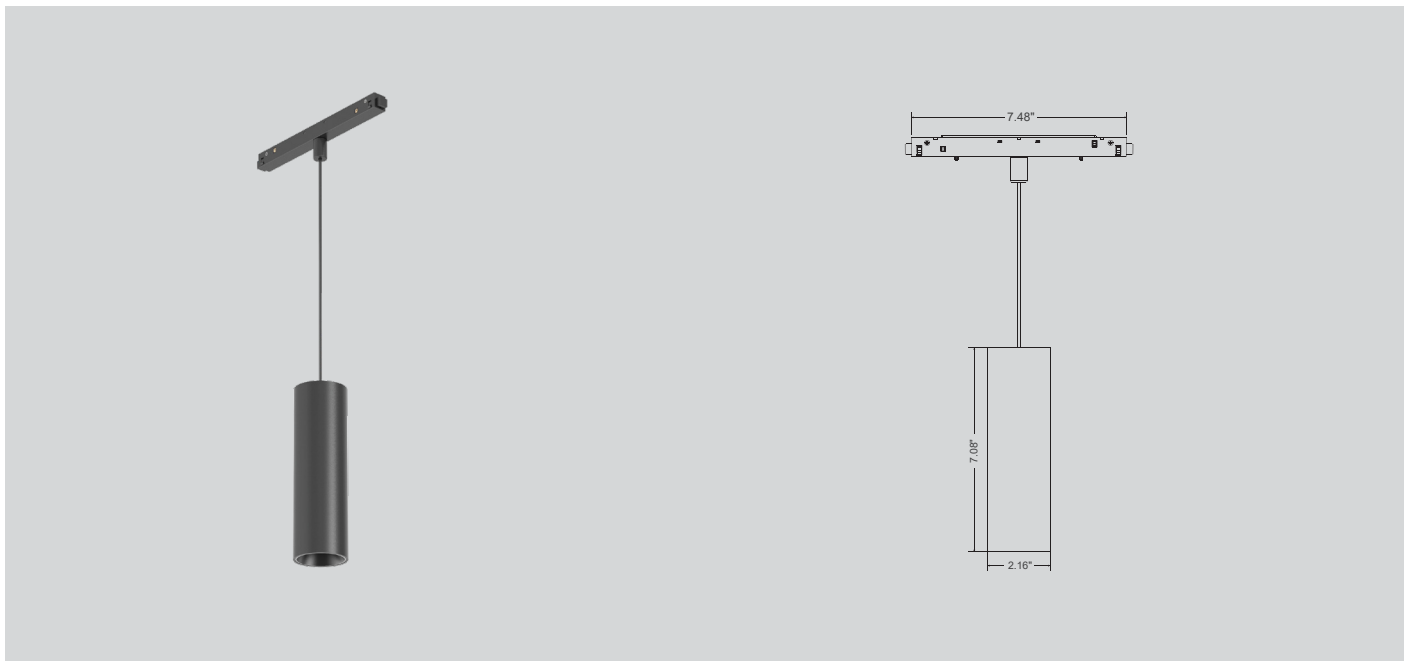

Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered CITIZEN led chip that maintains high lumens per watt.
- Available with 18°/ 24°/ 36°/ 50° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.



Warranty



Dimming



DALI



Intertek

SPOT CYLINDRICAL PENDANT 14



*Ref. Image

Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5
SPOT CYLINDRICAL PENDANT-14 CYL-14	L950/14W L95/14W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	18 Degree 18D 24 Degree 24D 36 Degree 36D 50 Degree 50D
FINISH 6	ACCESSORIES 7			
White WH Black BLK	Not Applicable NA			

Ordering Code:

1
2
3
4
5
6


7

*Example : SPOT14-L95/14W-27K-DMV-36D-BLK-NA



SPOT CYLINDRICAL PENDANT 14


Mounting Details:

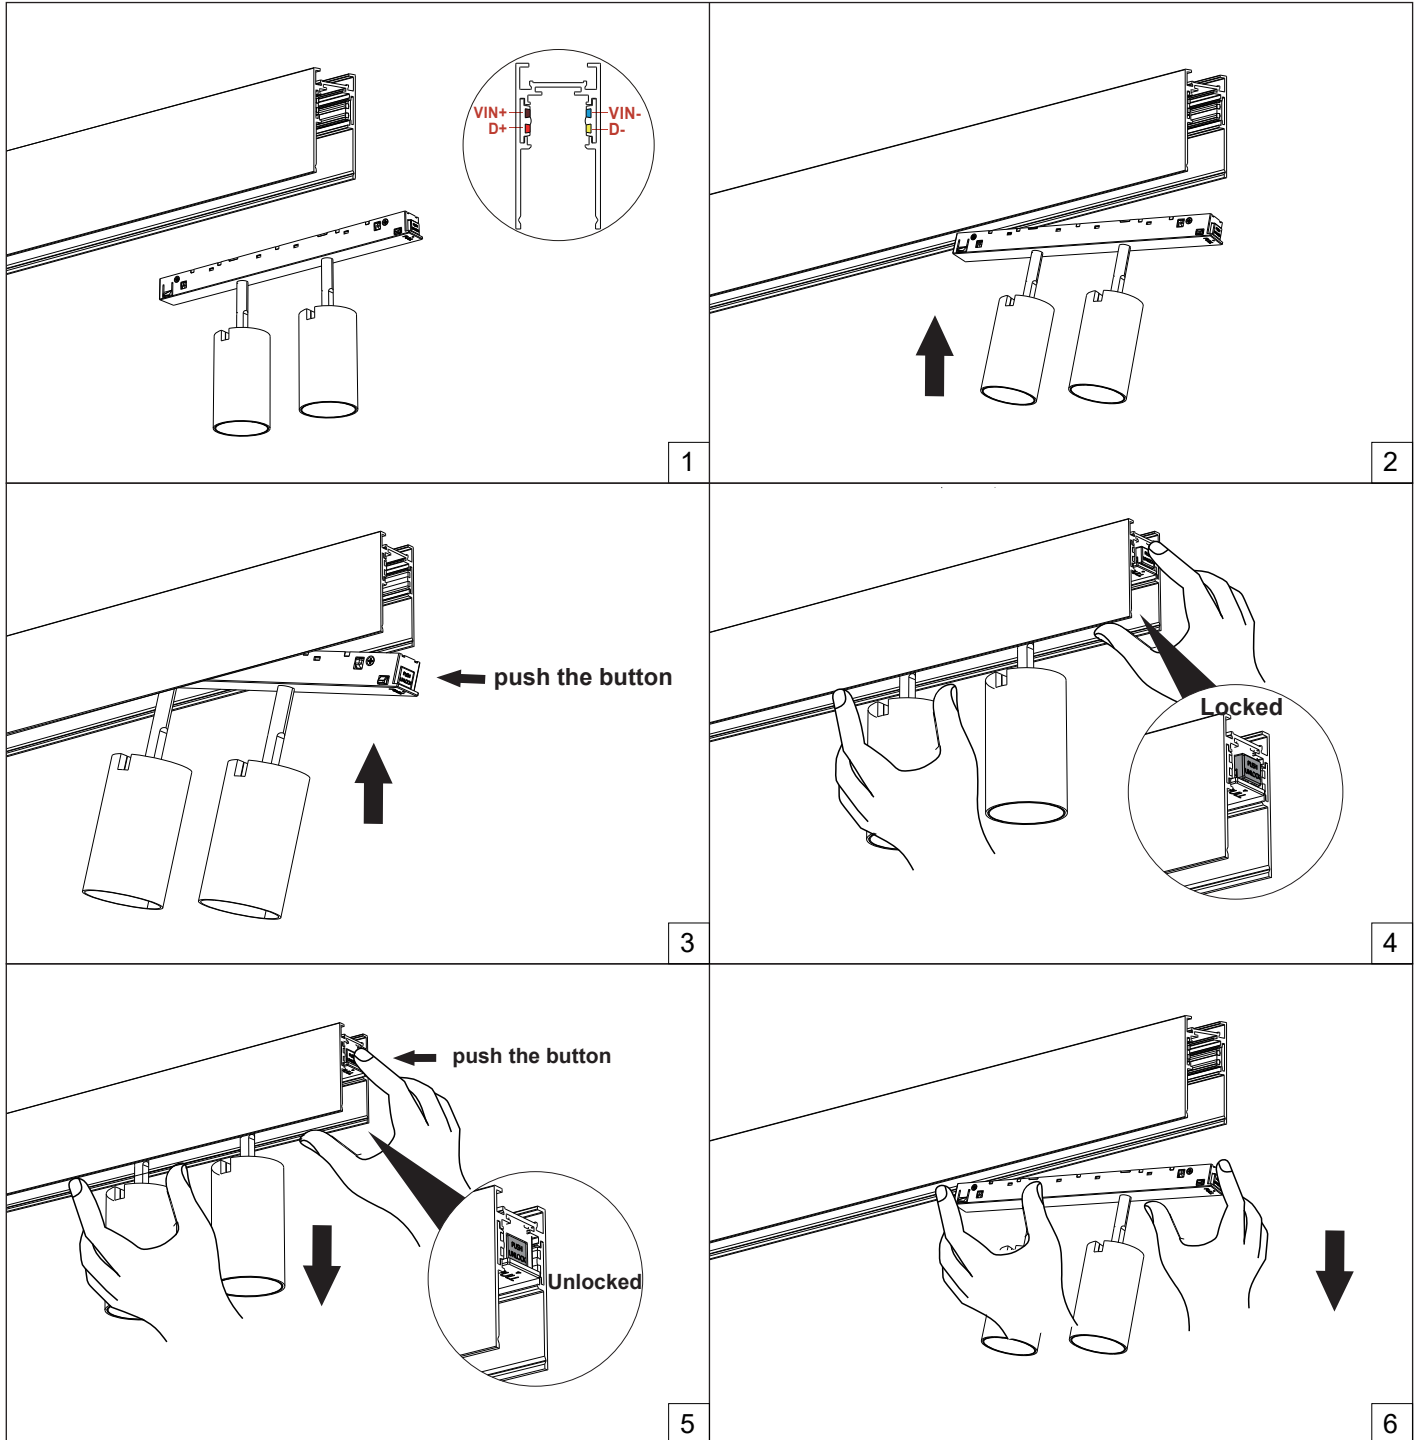


SPOT CYLINDRICAL PENDANT 14

Photometric:


14W-18D

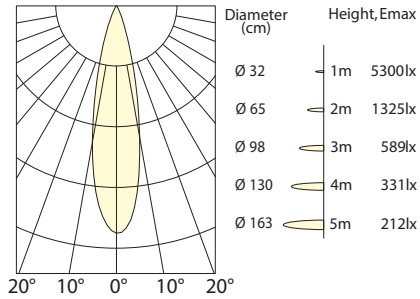

14W-24D

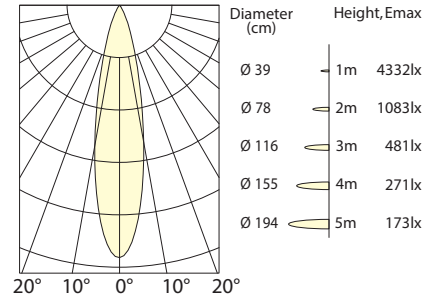

14W-36D

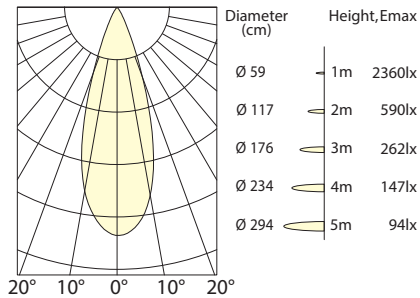

Lighting Chart:

WATT	LUMENS	CCT	CRI
14W	950 lm	3000K	CRI90



SPOT CYLINDRICAL PENDANT 14

Technical Details:

Material	Aluminium
Head Style	Adjustable
Trim Finish	White / Black
Lumens	Upto 950lm
Wattage	14W
Efficacy	68 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	18° / 24° / 36° / 50°
Dimming	DALI / 0-10V
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Voltage	120V / 120-277V
Housing	Non IC Rated / IC Rated
Certification	ETL LISTED / DRY RATED

