

Type: _____ Qty: _____

Project: _____



HELIUM LYTE

SPOT ZOOMABLE 10



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered CITIZEN led chip that maintains high lumens per watt.
- Zoom lens from 20°- 40°/ 35°- 60° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.



Warranty



Dimming




DALI



Intertek

SPOT ZOOMABLE 10

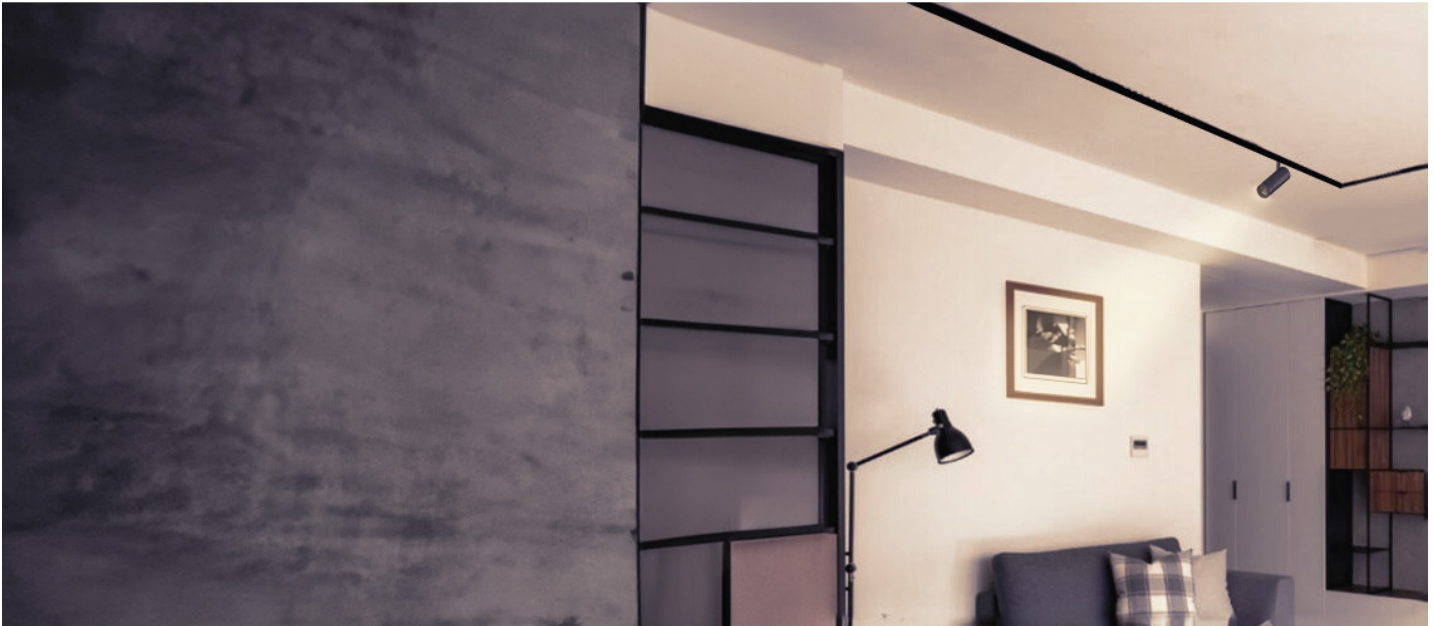

Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5
SPOT-ZOOMABLE 10 SPOTZ10	L800/10W -For 20° & 35° L80/10W	2700K 27K	0-10V DMV	20 - 40 Degree 20D-40D
	L750/10W -For 40° & 60° L75/10W	3000K 30K 3500K 35K 4000K 40K	DALI DALI	35 - 60 Degree 35D-60D
FINISH 6	ACCESSORIES 7			
White Black WH BLK	Not Applicable NA			

Ordering Code:

1
2
3
4
5
6


7

*Example : SPOTZ10-L75/10W-27K-DMV-20D-40D-BLK-NA



SPOT ZOOMABLE 10


Mounting Details:

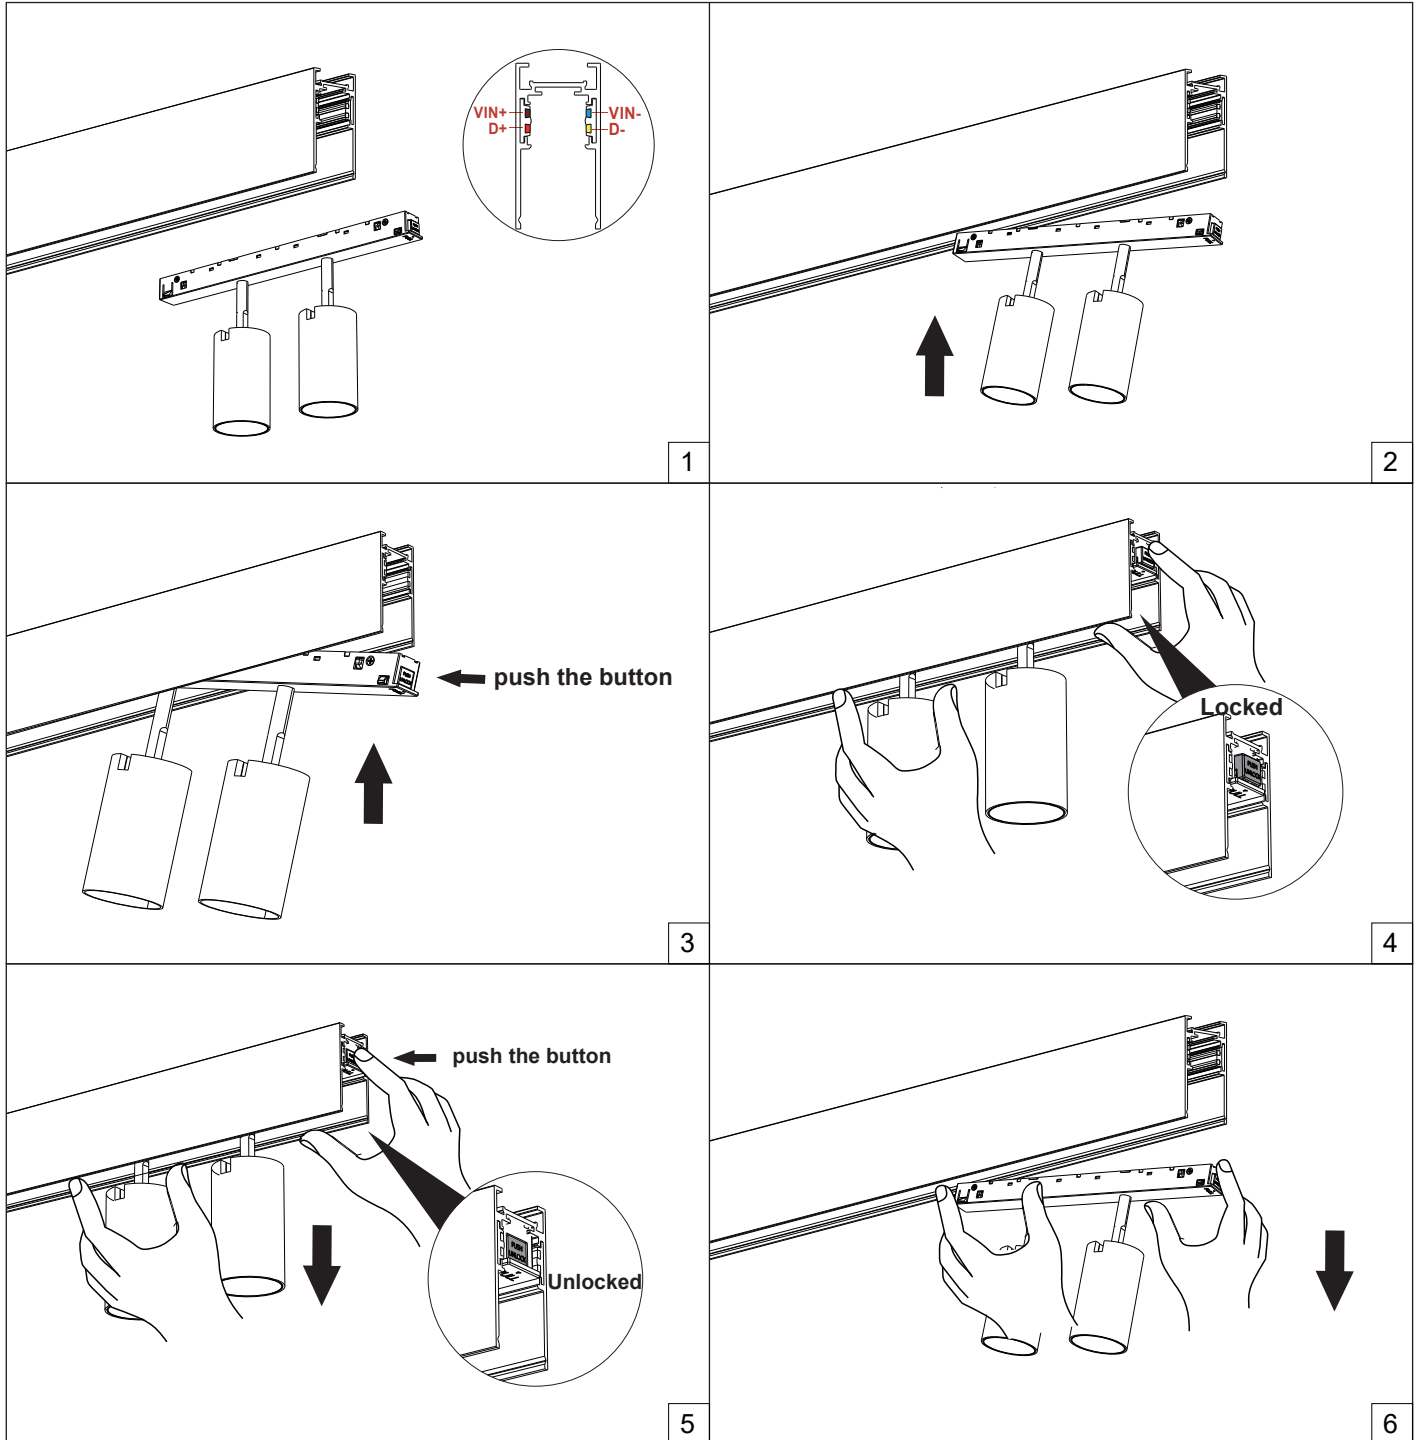


SPOT ZOOMABLE 10

Photometric:


10W-20D

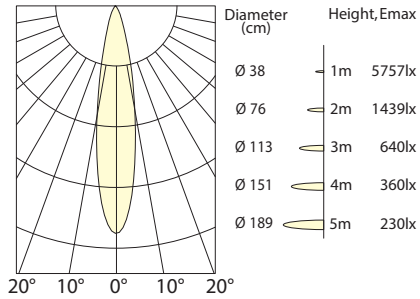

10W-35D

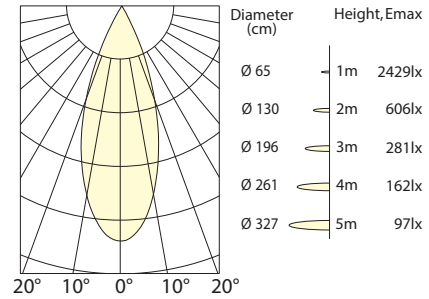

10W-40D

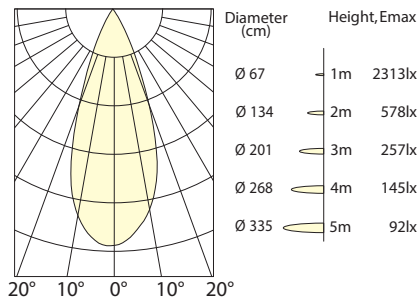

Lighting Chart:

WATT	LUMENS	CCT	CRI
10W	800 lm	3000K	CRI90



SPOT ZOOMABLE 10

Technical Details:

Material	Aluminium
Head Style	Adjustable
Trim Finish	White / Black
Lumens	Upto 800lm
Wattage	10W
Efficacy	80 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	20°-40° / 35° - 60°
Dimming	DALI / 0-10V
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Voltage	120V / 120-277V
Housing	Non IC Rated / IC Rated
Certification	ETL LISTED / DRY RATED

