


Type: \_\_\_\_\_ Qty: \_\_\_\_\_

Project: \_\_\_\_\_



HELIUM LYTE

# ADJUSTABLE 7

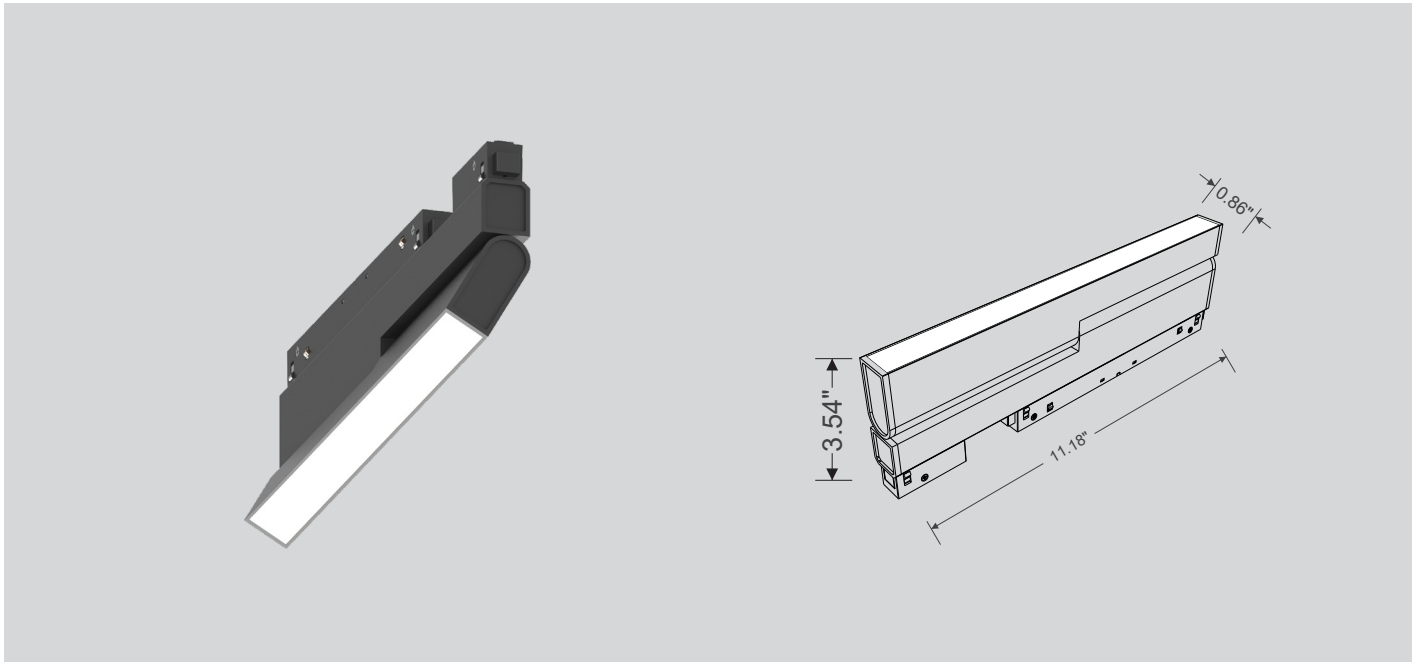

## Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered SAMSUNG led chip that maintains high lumens per watt.
- Available with 110° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.



Warranty



Dimming



DALI



Intertek

# ADJUSTABLE 7



\*Ref. Image

## Specs Code:

FIXTURE ID <span>1</span>	LUMENS / WATT <span>2</span>	LED OPTION <span>3</span>	DIMMING <span>4</span>	BEAM ANGLE <span>5</span>
ADJUSTABLE-7 <b>ADJ7</b>	L400/7W <b>L40/7W</b>	2700K <b>27K</b> 3000K <b>30K</b> 3500K <b>35K</b> 4000K <b>40K</b>	0-10V <b>DMV</b> DALI <b>DALI</b>	110 Degree <b>110D</b>
FINISH <span>6</span>	ACCESSORIES <span>7</span>			
White <b>WH</b> Black <b>BLK</b>	Not Applicable <b>NA</b>			

## Ordering Code:

1

2

3

4

5

6


7

\*Example : ADJ7-L40/7W-27K-DMV-110D-BLK-NA



# ADJUSTABLE 7


## Mounting Details:

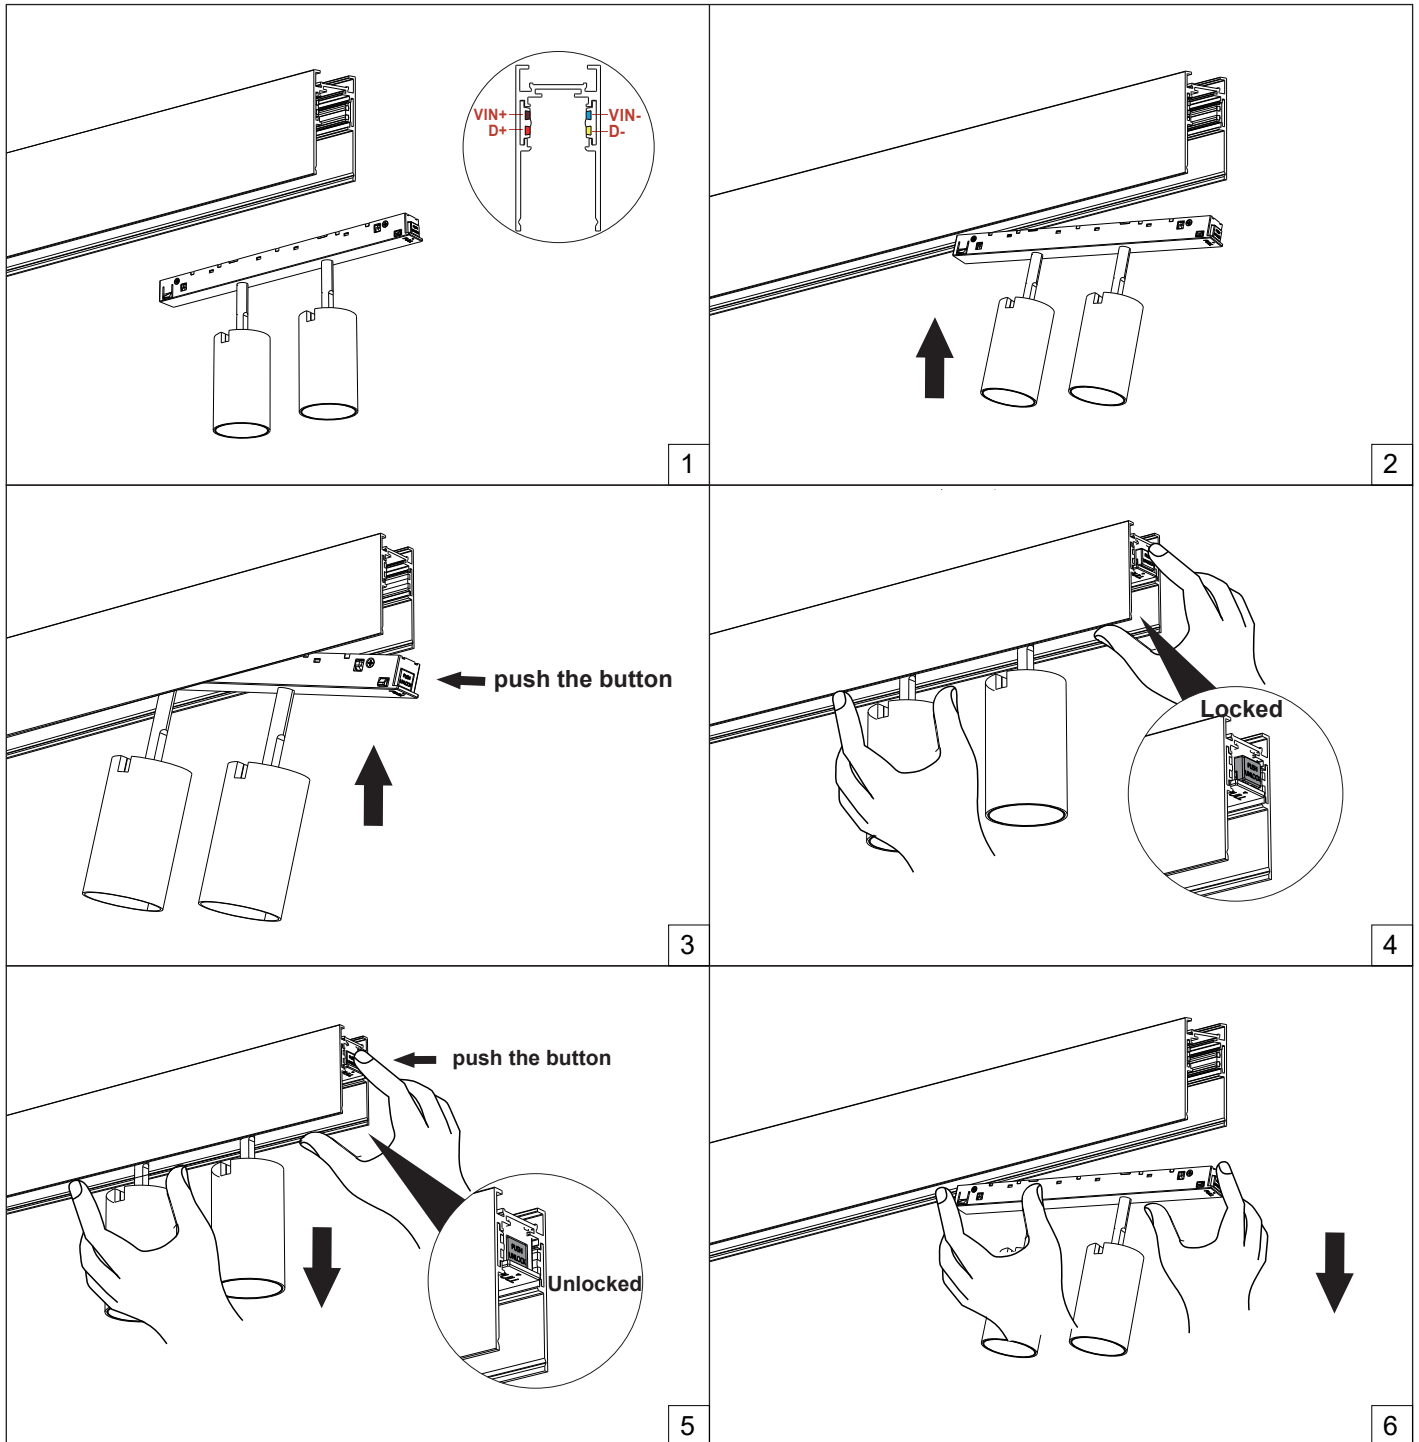

# ADJUSTABLE 7

## Photometric:

07W-110 D

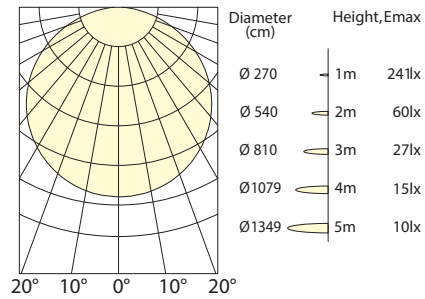

## Lighting Chart:

WATT	LUMENS	CCT	CRI
07W	400 lm	3000K	CRI90





# ADJUSTABLE 7

## Technical Details:

Material	Extruded Aluminium
Head Style	Adjustable
Trim Finish	White / Black
Lumens	Upto 400lm
Wattage	07W
Efficacy	59 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	110°
Dimming	DALI / 0-10V
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Voltage	120V / 120-277V
Housing	Non IC Rated / IC Rated
Certification	ETL LISTED / DRY RATED



Warranty



Dimming



DALI



Intertek