


Type:_____ Qty:_____

Project:_____



HELIUM LYTE

CELL 12 HEAD ADJUSTABLE

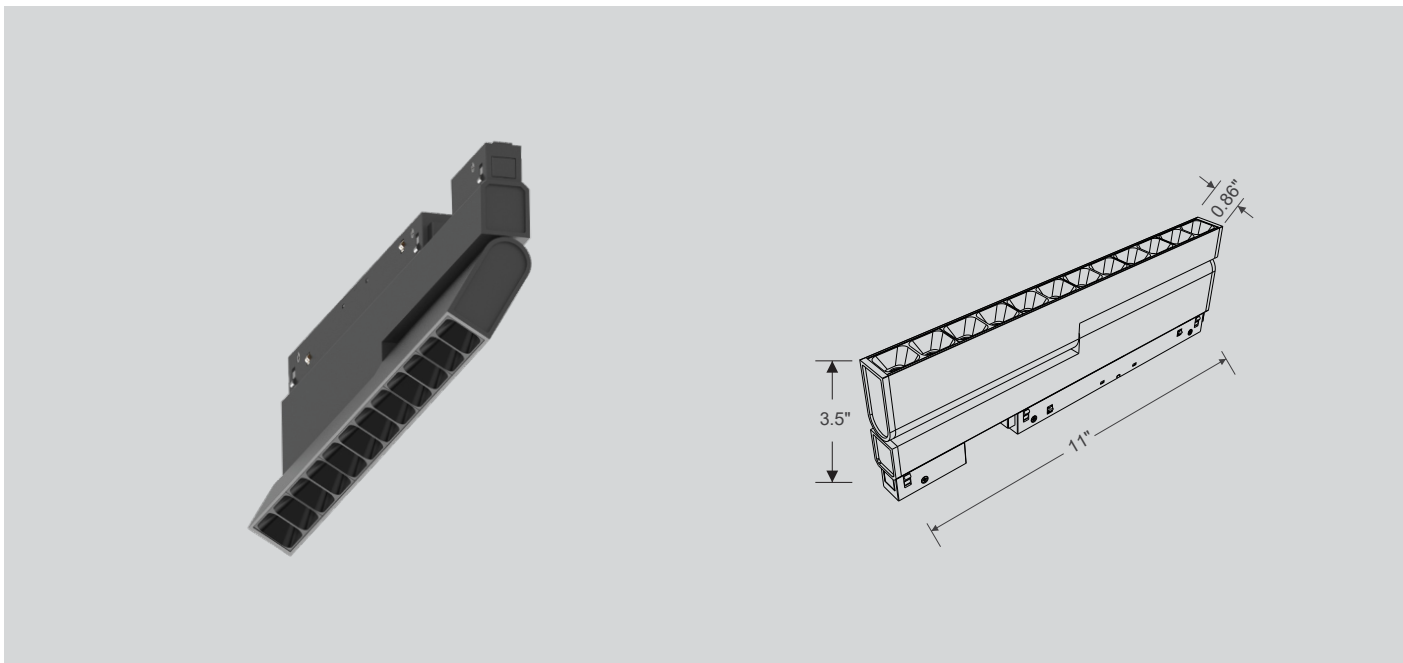

Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSARAM led chip that maintains high lumens per watt.
- Available with 20°/ 35° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.



Warranty



Dimming



DALI



Intertek

CELL 12 HEAD ADJUSTABLE



*Ref. Image

Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5
CELL- CELL12HADJ 12HEAD ADJUSTABLE	L1100/13W L110/13W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	20 Degree 20D 35 Degree 35D
FINISH 6	ACCESSORIES 7			
White WH Black BLK	Not Applicable NA			

Ordering Code:


1
2
3
4
5
6

7

*Example : CELL12HADJ-L110/13W-27K-DMV-20D-BLK-NA

CELL 12 HEAD ADJUSTABLE


Mounting Details:

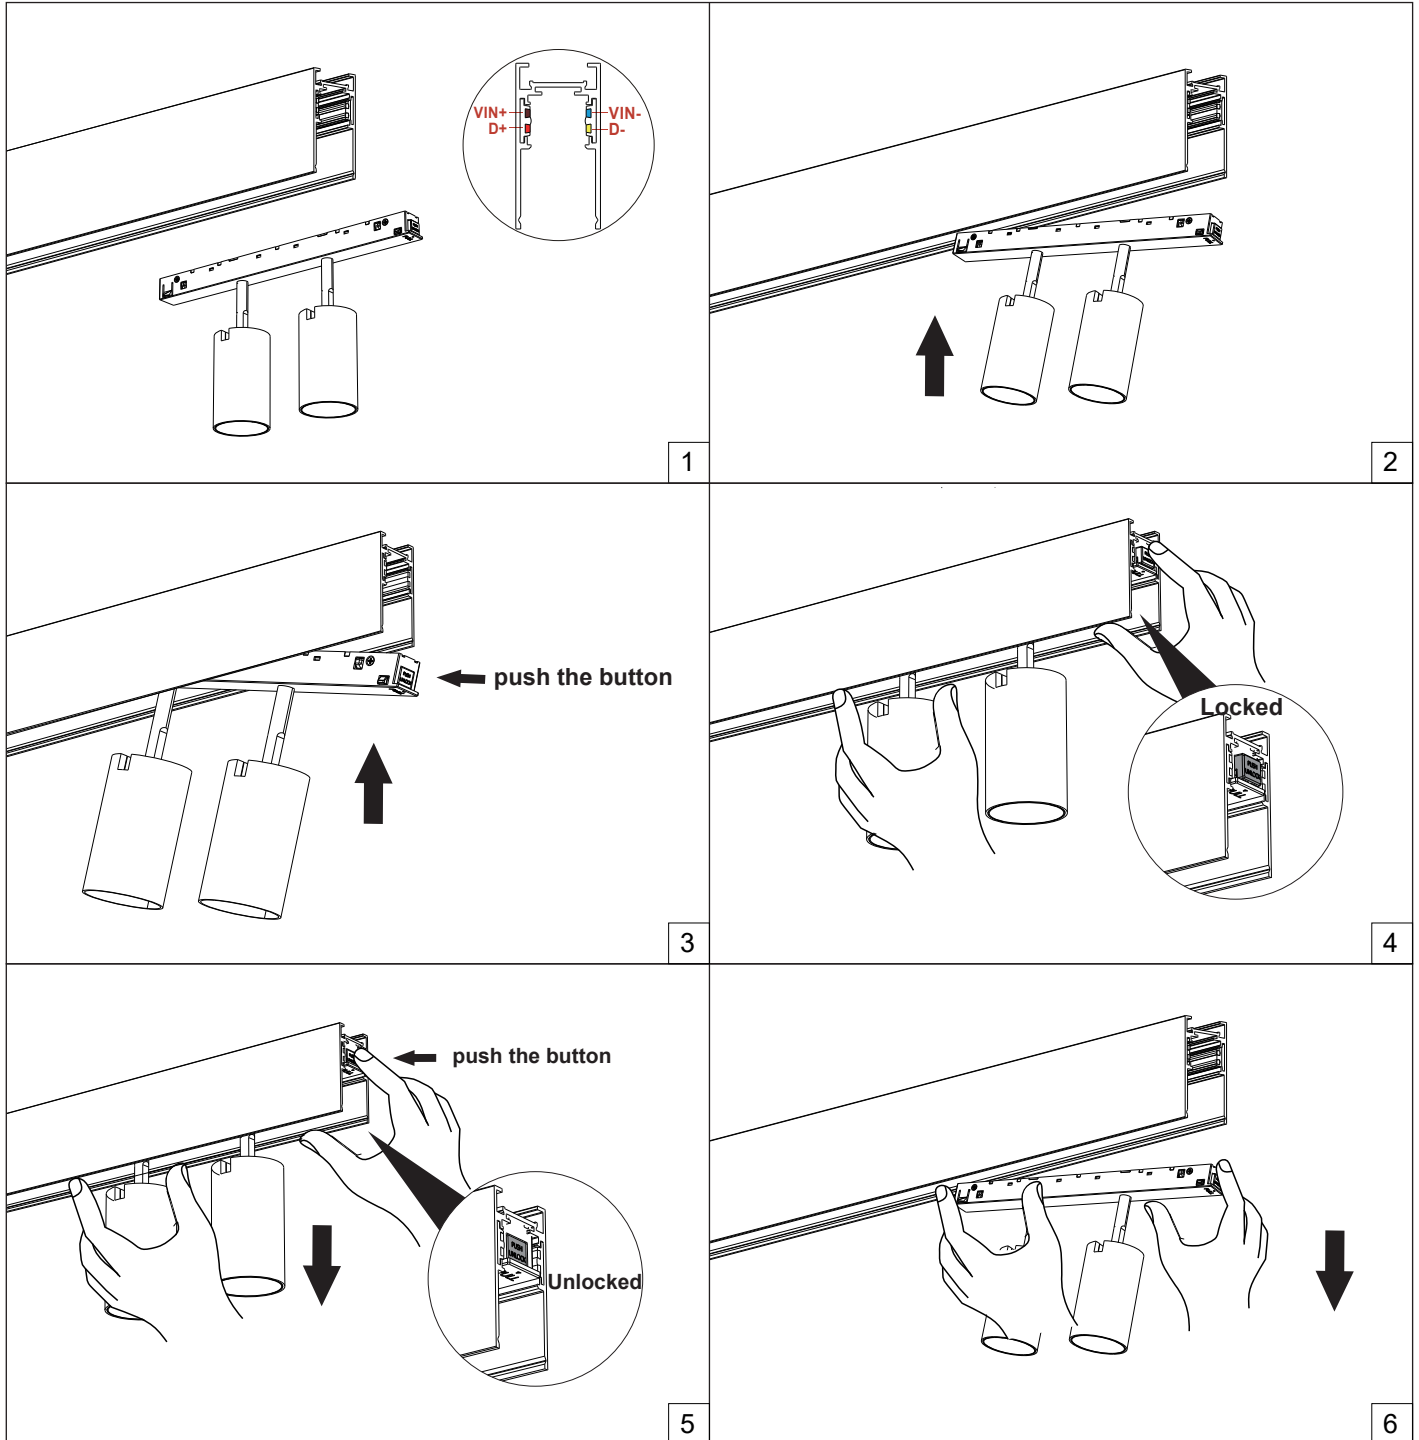


CELL 12 HEAD ADJUSTABLE

Photometric:

13W-20 D

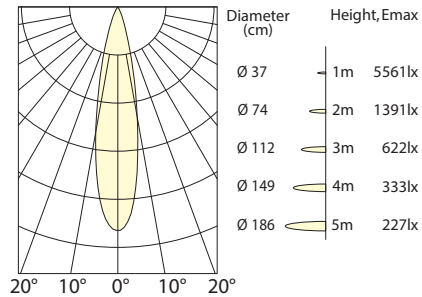

13W-35 D

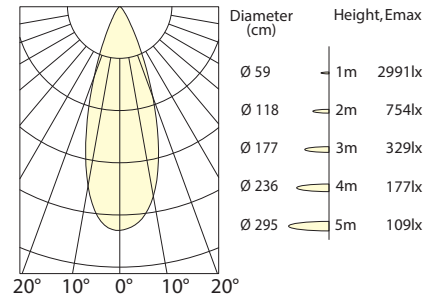

Lighting Chart:

WATT	LUMENS	CCT	CRI
13W	1100 lm	3000K	CRI90





CELL 12 HEAD ADJUSTABLE

Technical Details:

Material	Extruded Aluminium
Head Style	Adjustable
Trim Finish	White / Black
Lumens	Upto 1100lm
Wattage	13W
Efficacy	85 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	20° / 35°
Dimming	DALI / 0-10V
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Voltage	120V / 120-277V
Housing	Non IC Rated / IC Rated
Certification	ETL LISTED / DRY RATED



Warranty



Dimming



DALI



Intertek