

Type: _____ Qty: _____

Project: _____




HELIUM LYTE


TRACK WALL WASH



WW-7

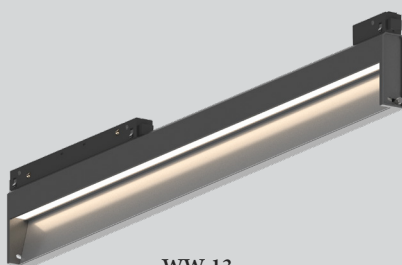

WW-13

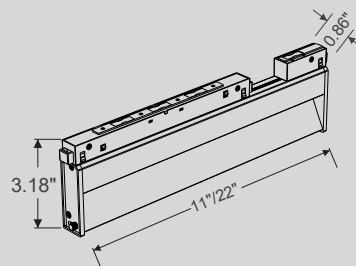

Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered SAMSUNG led chip that maintains high lumens per watt.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.



Warranty



Dimming



DALI



Intertek



TRACK WALL WASH



*Ref. Image

Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5
TRACK WALL WASH TWW	L350/7W L35/7W L700/13W L70/13W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	Wall Washer WW
FIXTURE LENGTH 6	FINISH 7	ACCESSORIES 8		
7W -11 Inch 11IN 13W -22 Inch 22IN	White WH Black BLK	Not Applicable NA		

Ordering Code:


1	2	3	4	5	6
7	8				

*Example : TWW-L35/7W-27K-DMV-WW-11IN-BLK-NA



TRACK WALL WASH


Mounting Details:

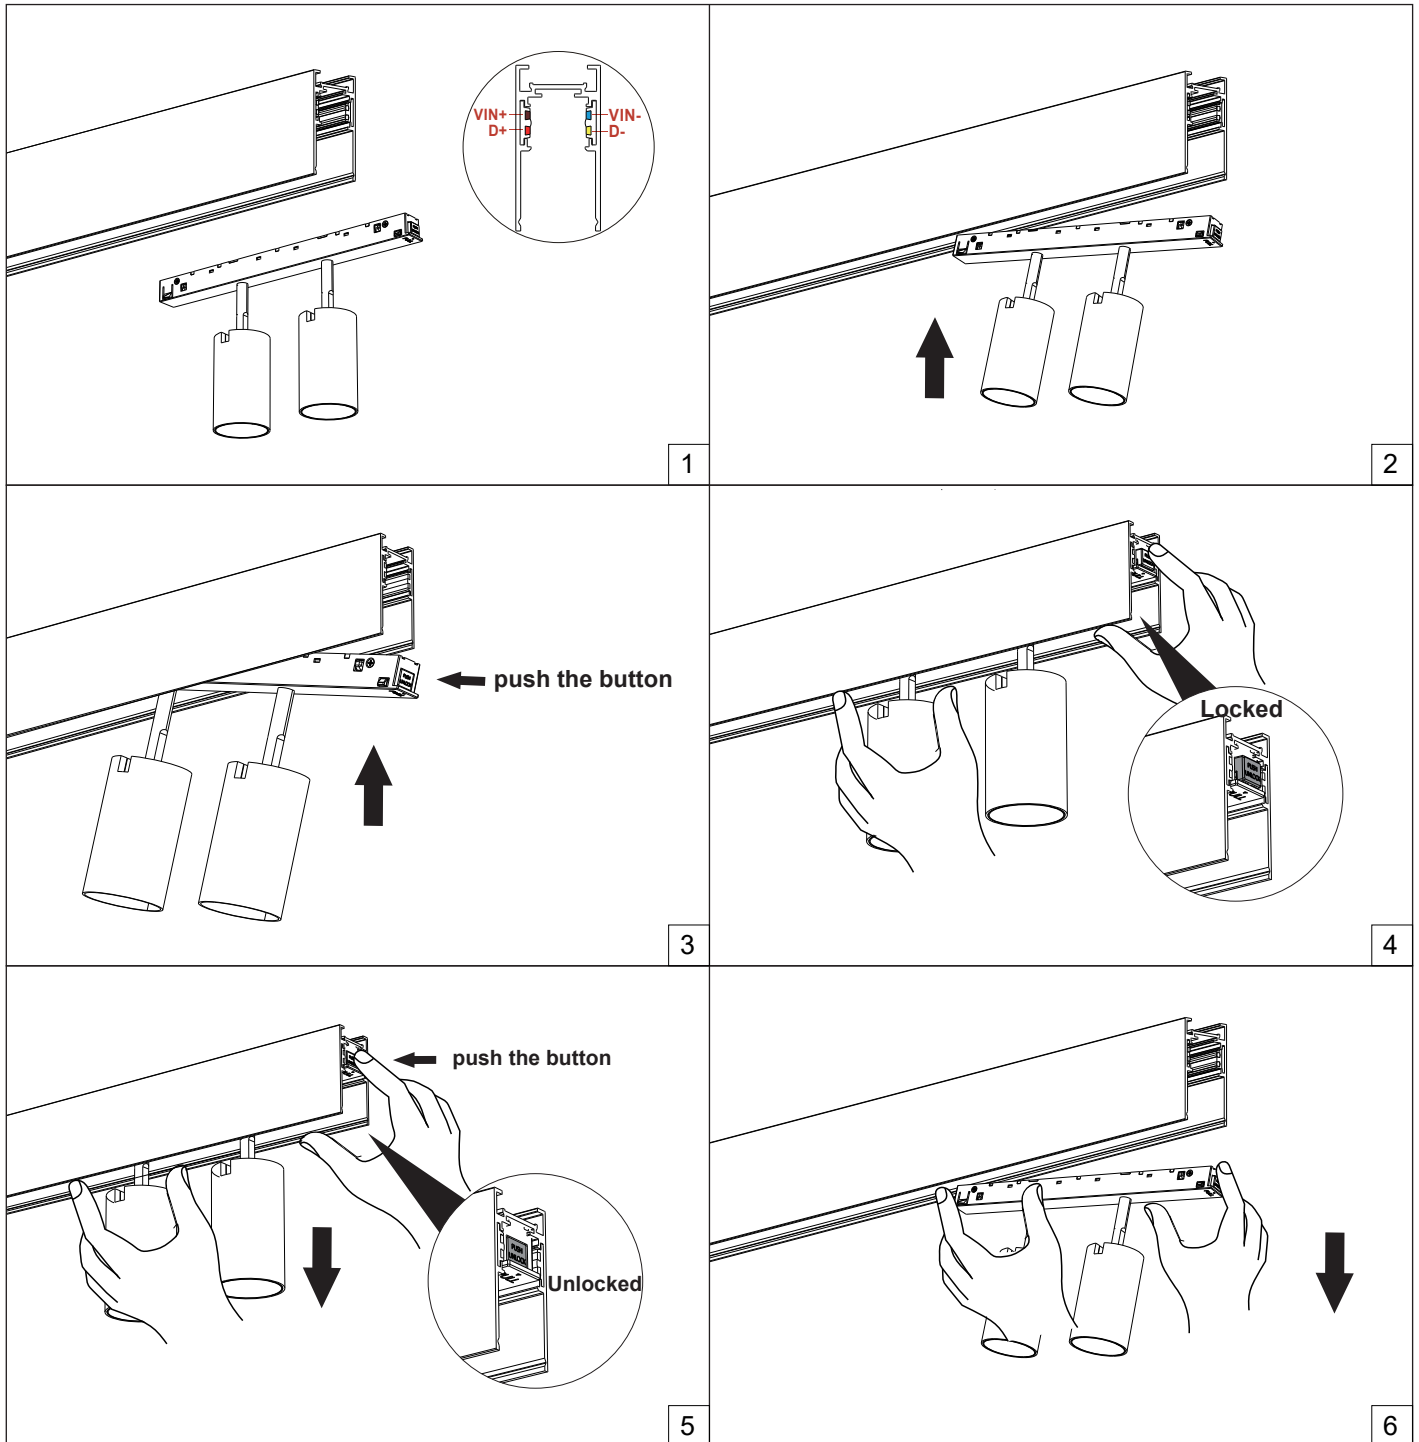

TRACK WALL WASH

Photometric:

07W-WALL WASH

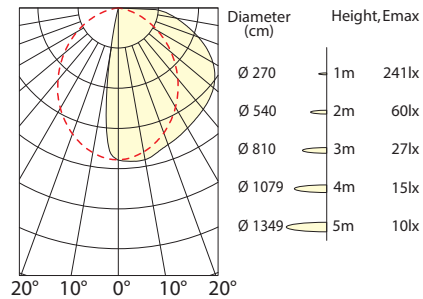

Lighting Chart:

WATT	LUMENS	CCT	CRI
07W	350 lm	3000K	CRI90
13W	700 lm	3000K	CRI90





TRACK WALL WASH

Technical Details:

Material	Extruded Aluminium
Head Style	Fixed
Trim Finish	White / Black
Lumens	Upto 700lm
Wattage	07W / 13W
Efficacy	54 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	Wall Wash
Dimming	DALI / 0-10V
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Voltage	120V / 120-277V
Housing	Non IC Rated / IC Rated
Certification	ETL LISTED / DRY RATED



Warranty



Dimming



DALI



Intertek