





SILENTIUM INSTALLATION - MILWORK CEILING

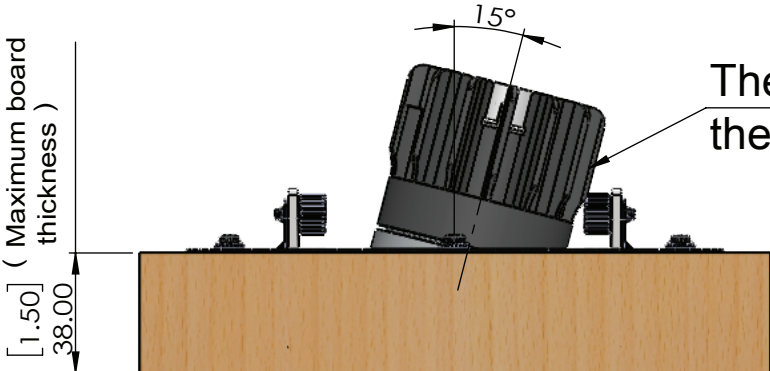


HELIUM LYTE

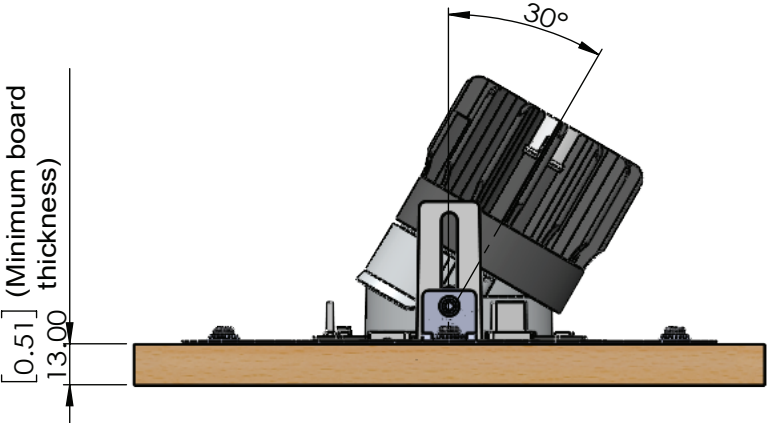


The maximum swing angle in the direction with pillars is 15°

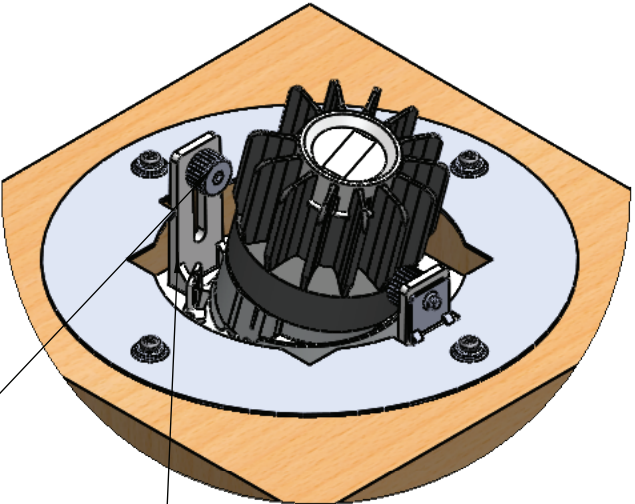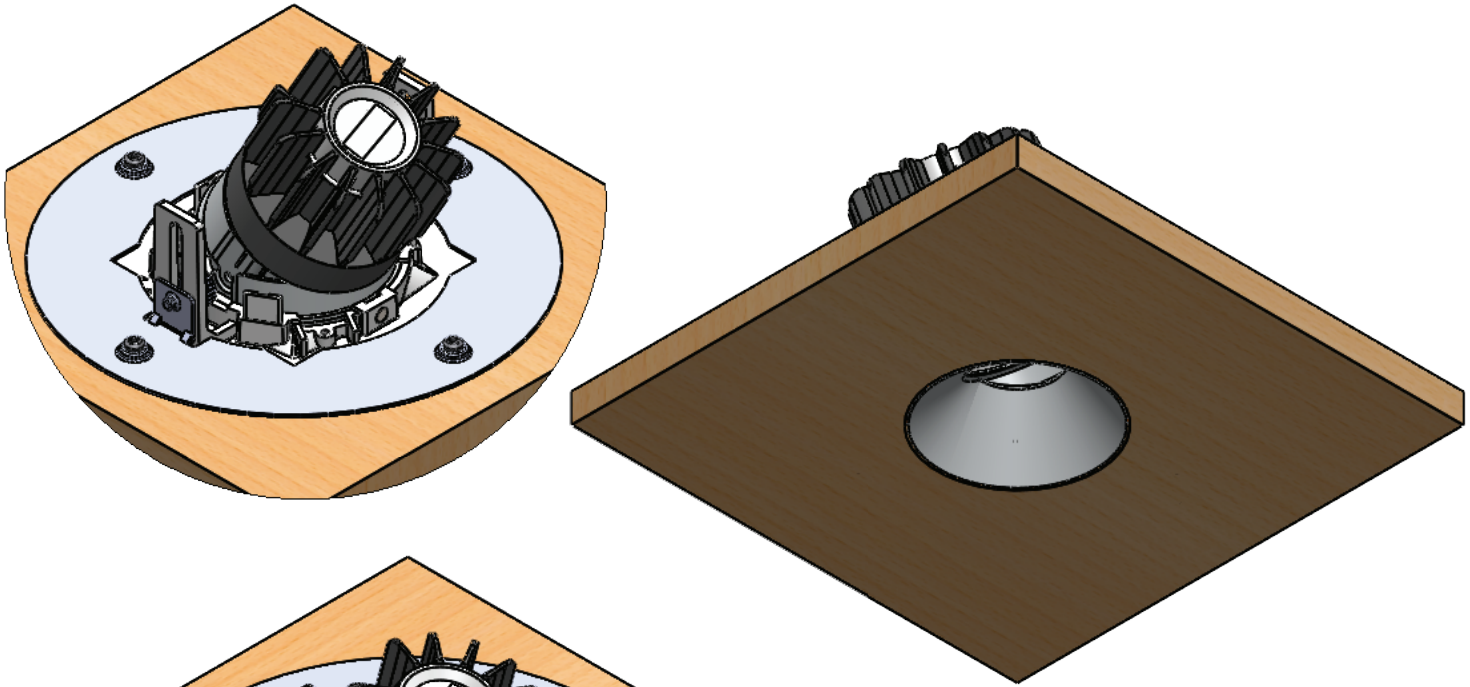

Thumb screws

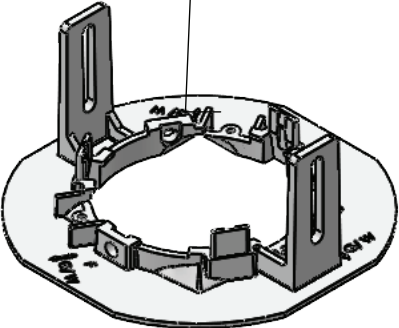


Face Frame

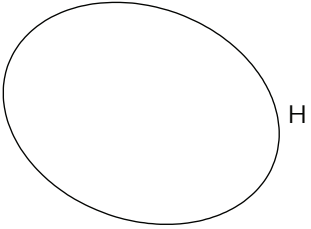



SILENTIUM INSTALLATION - MILWORK CEILING



HELIUM LYTE

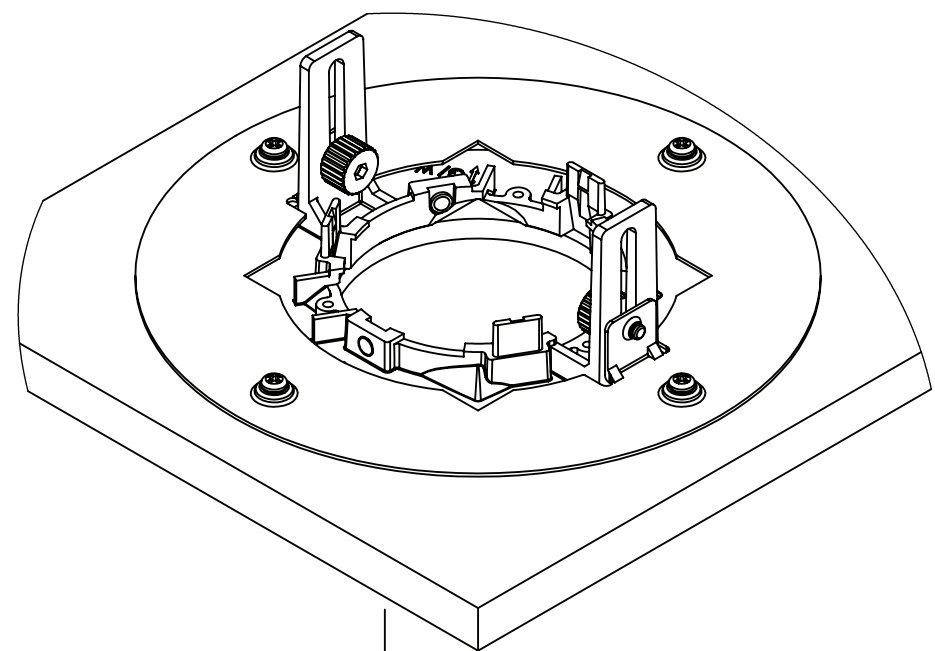


Can Be Used With Below Light Engines

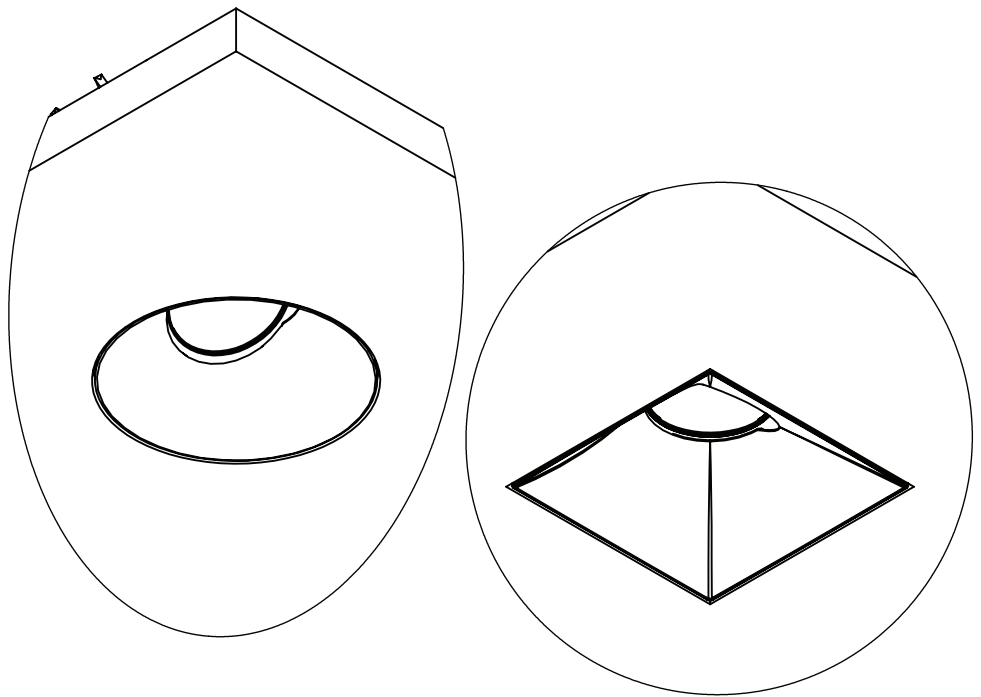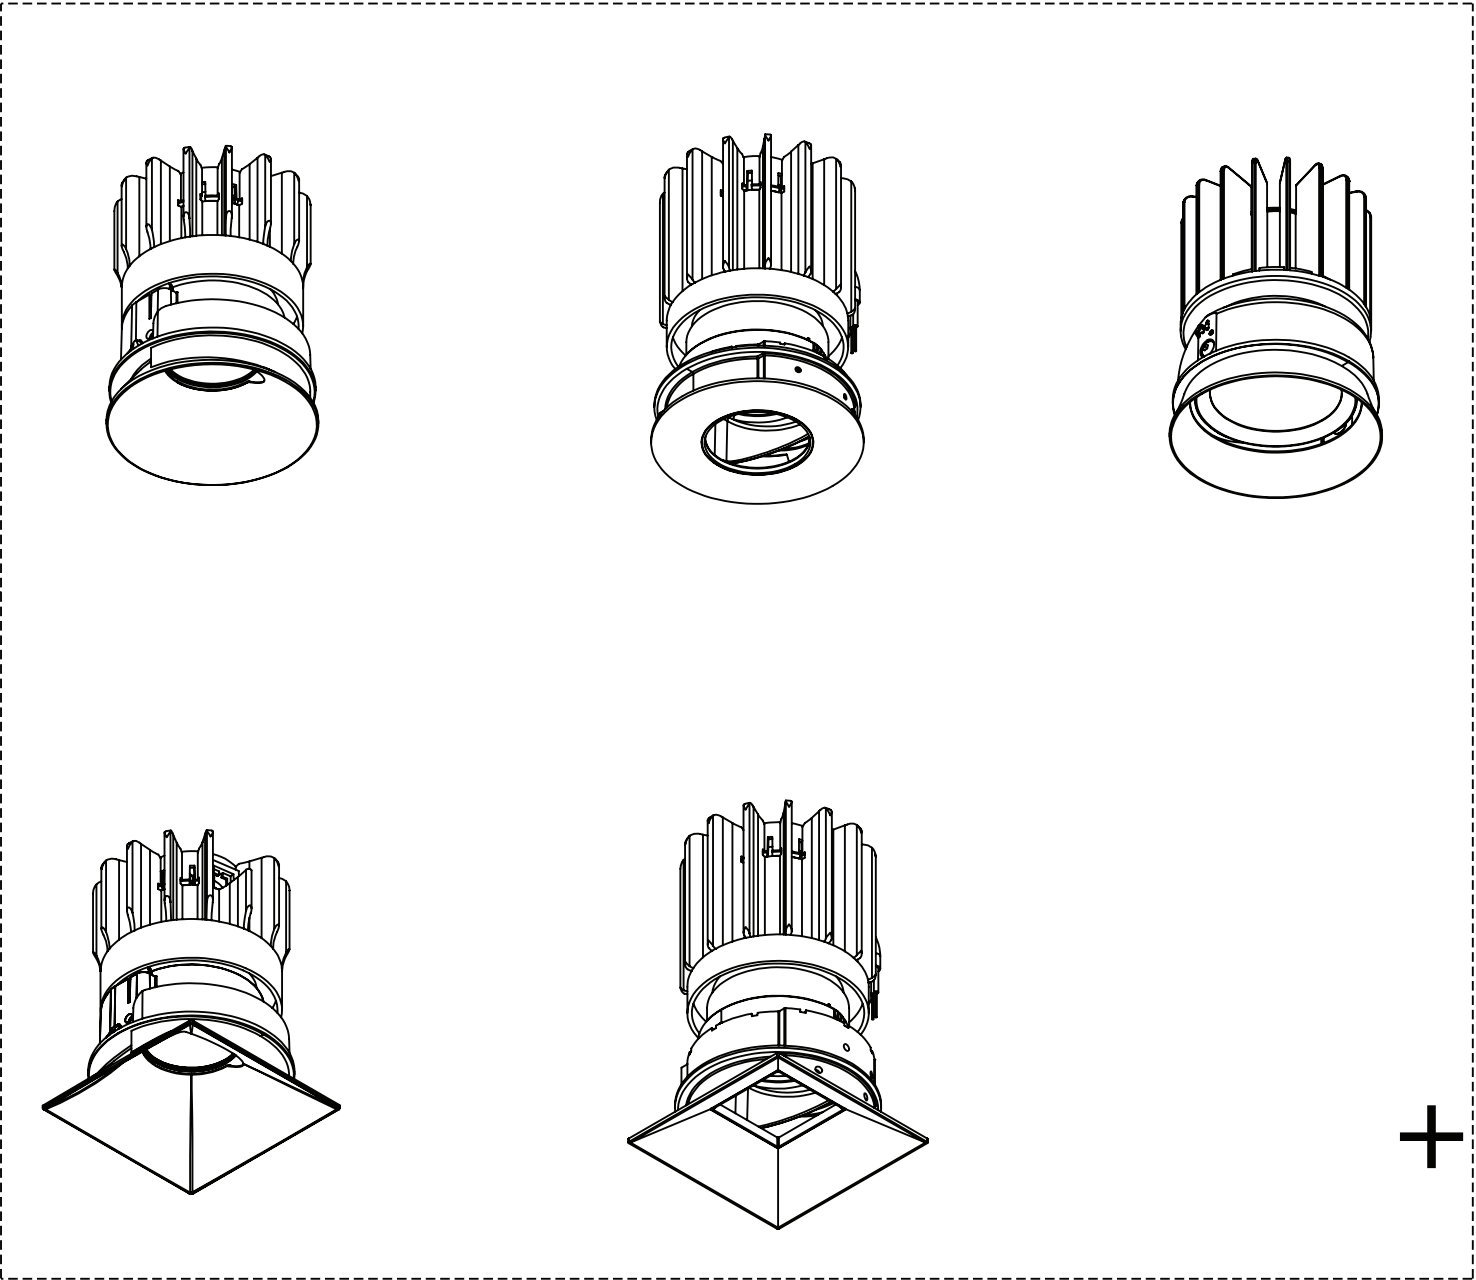

SILENTIUM INSTALLATION - MILWORK CEILING




Installation method 1

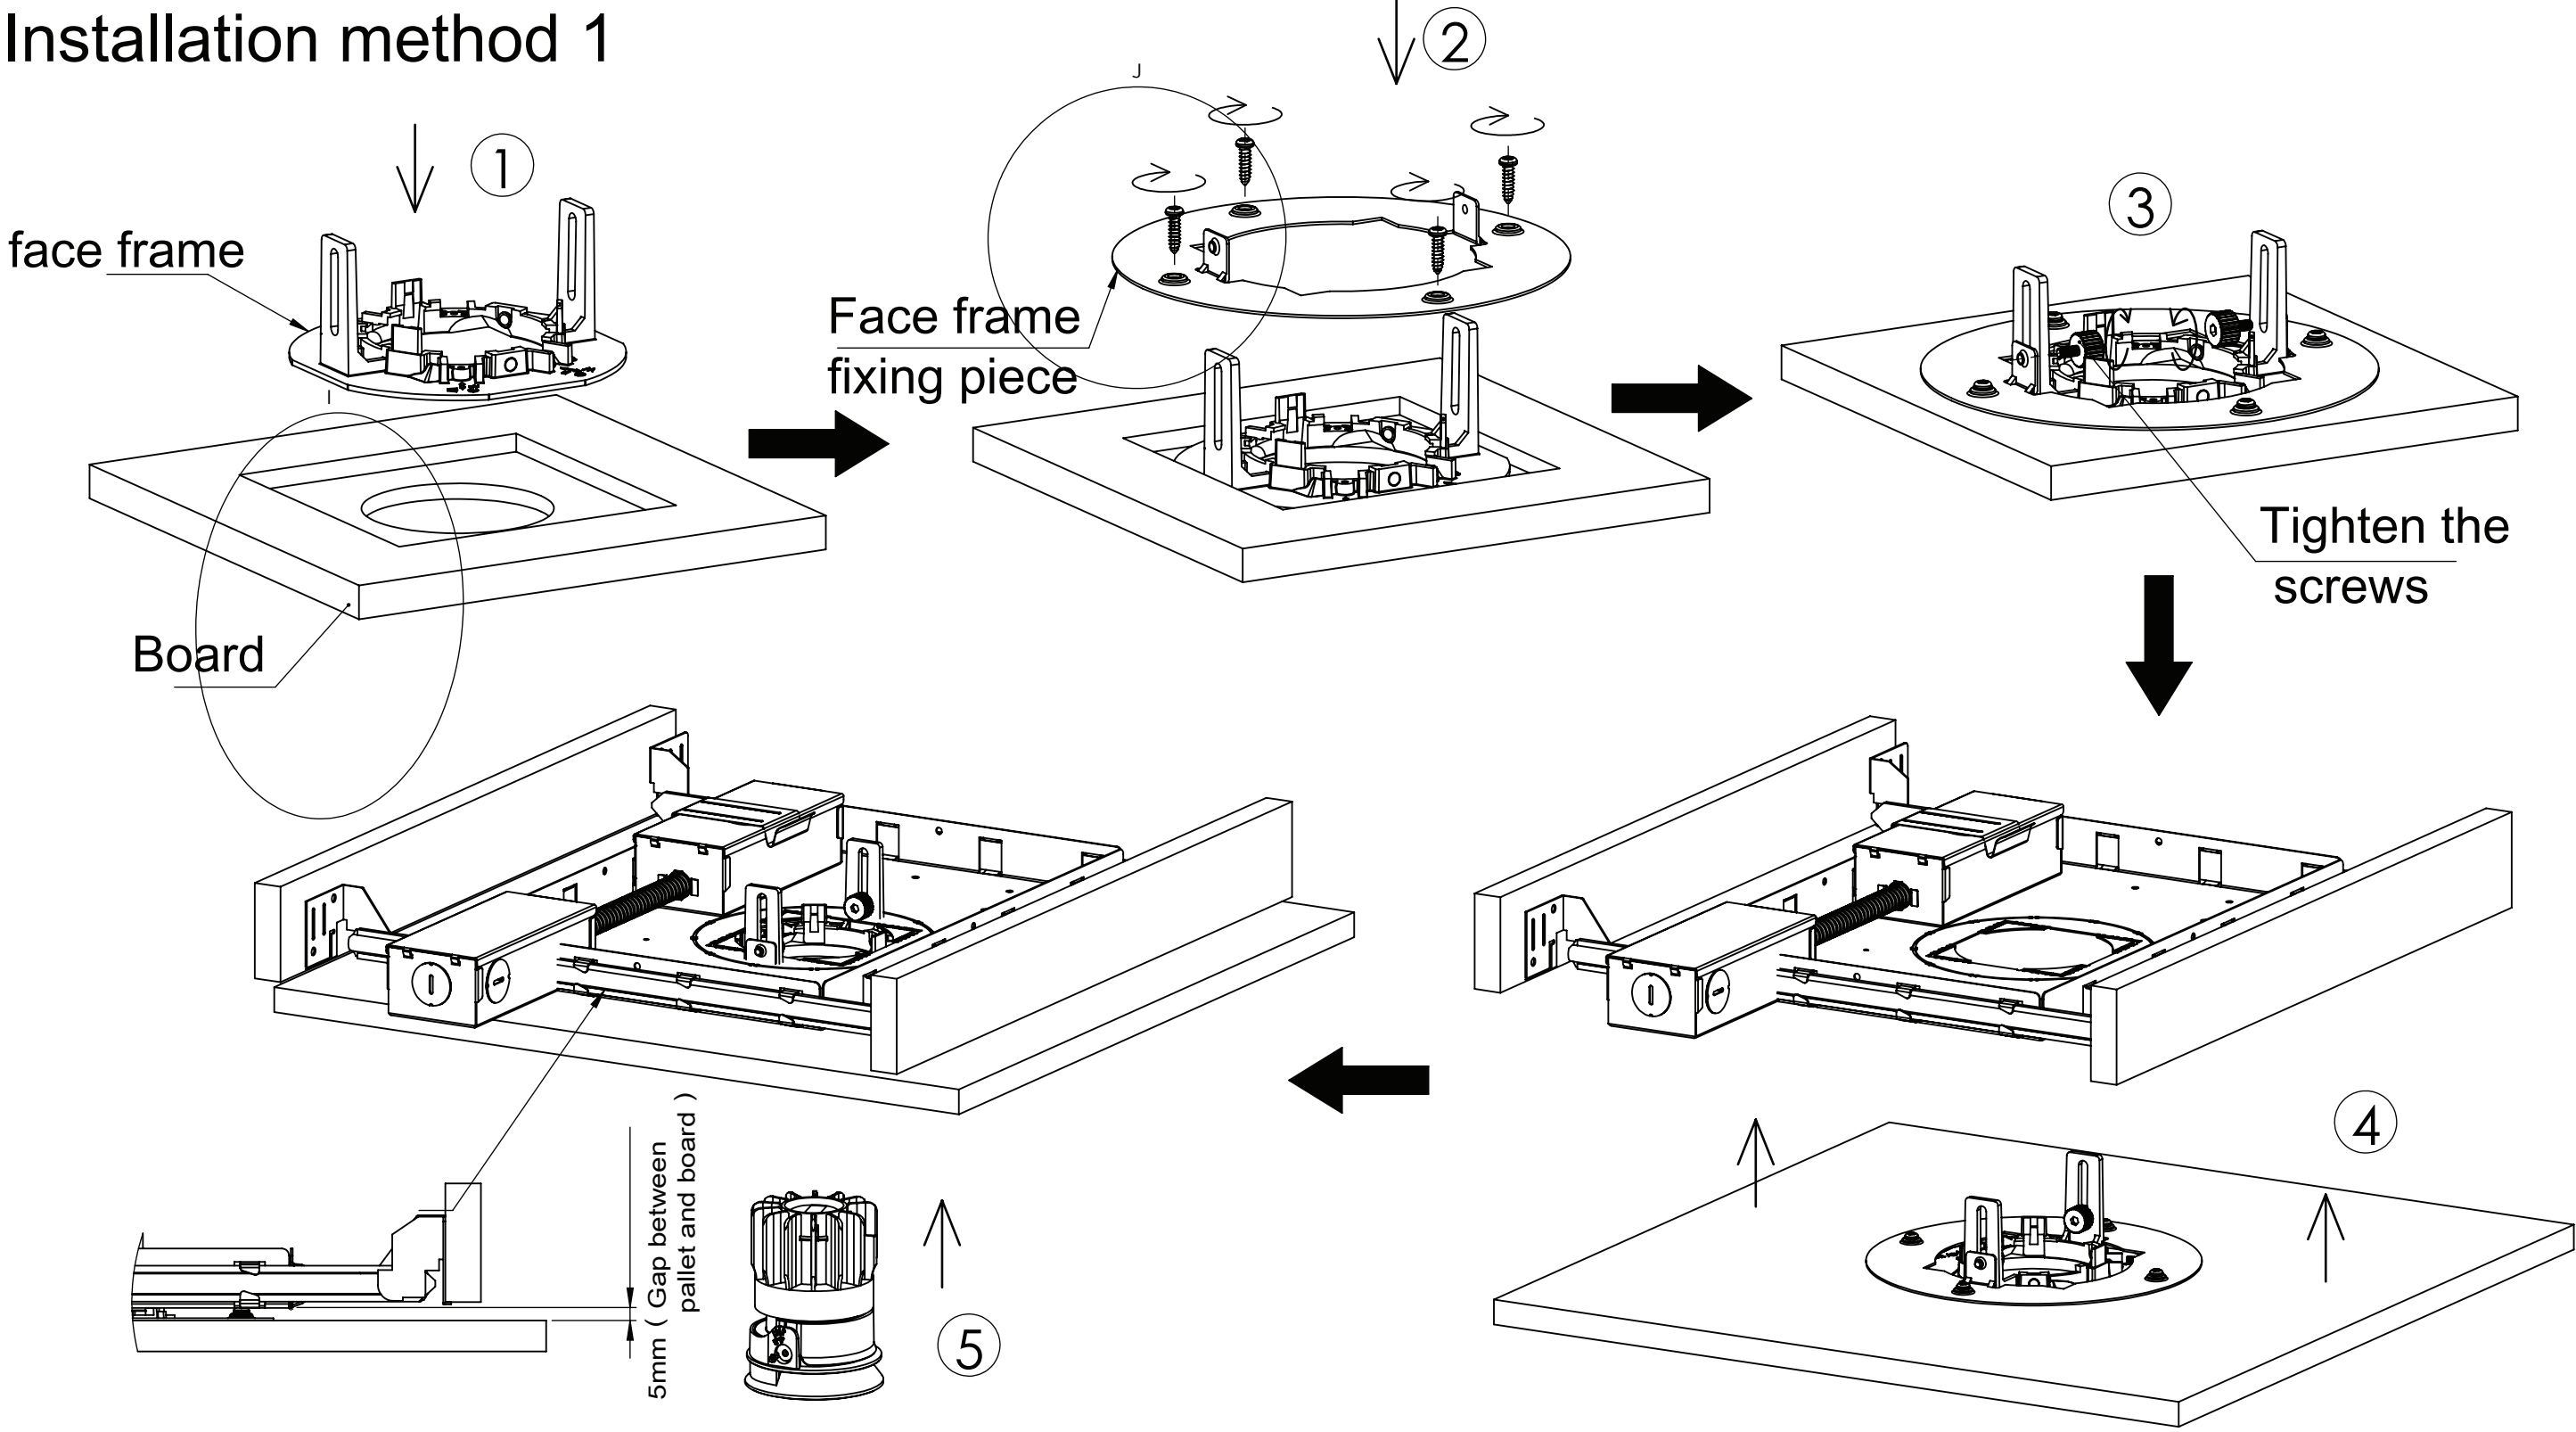


SILENTIUM INSTALLATION - MILWORK CEILING





Installation method 2

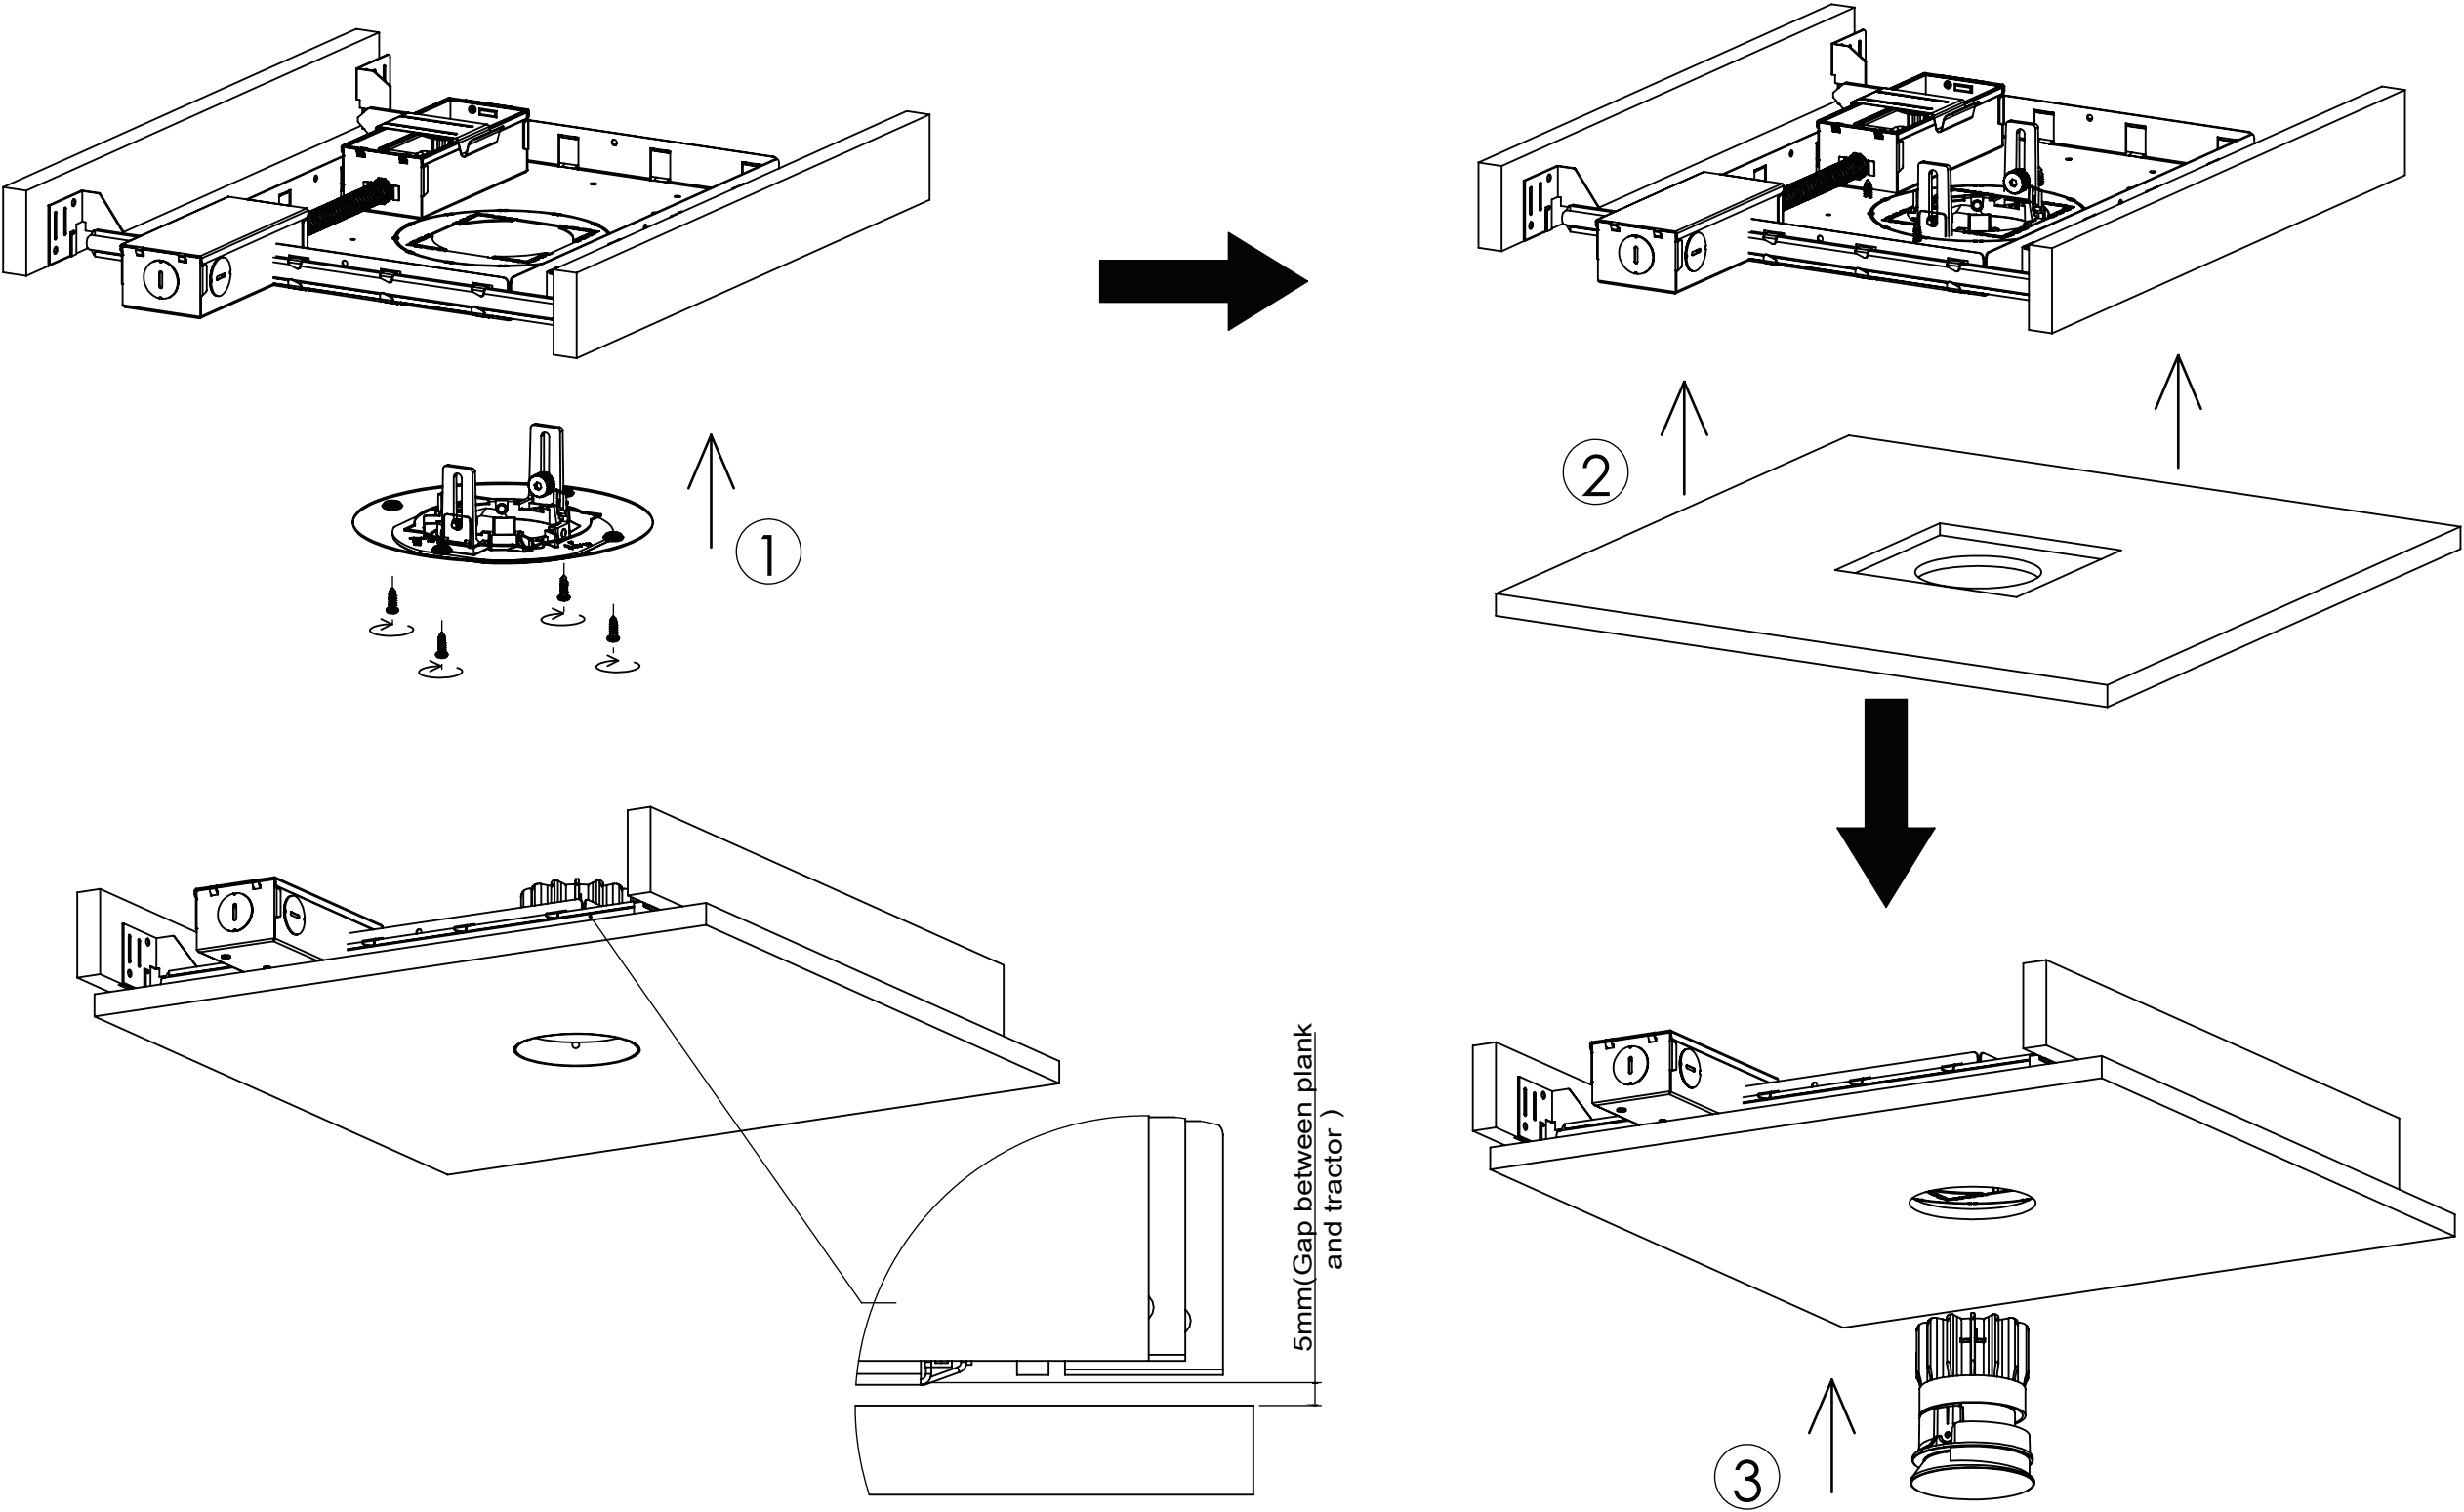

SILENTIUM INSTALLATION - MILWORK CEILING

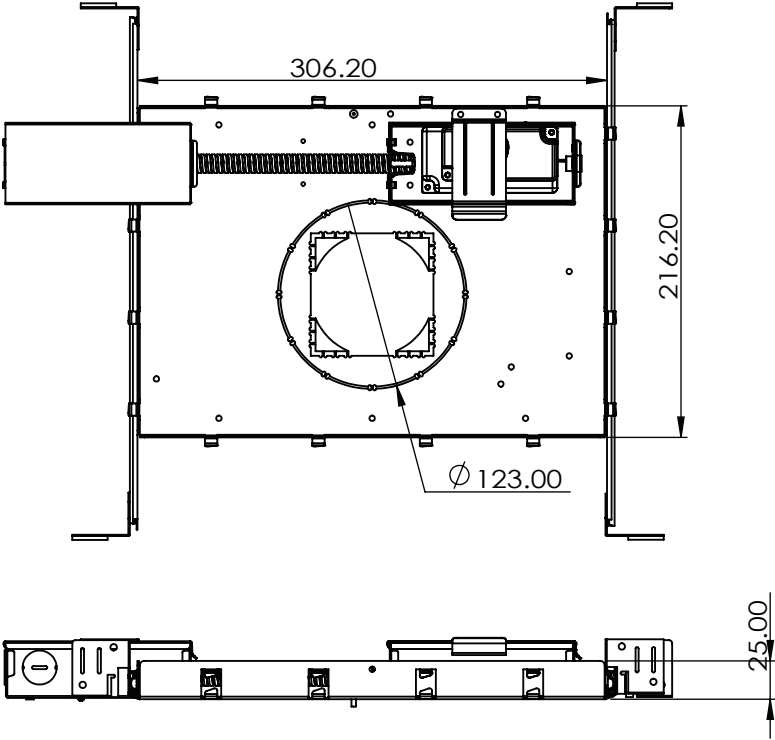

NON-IC

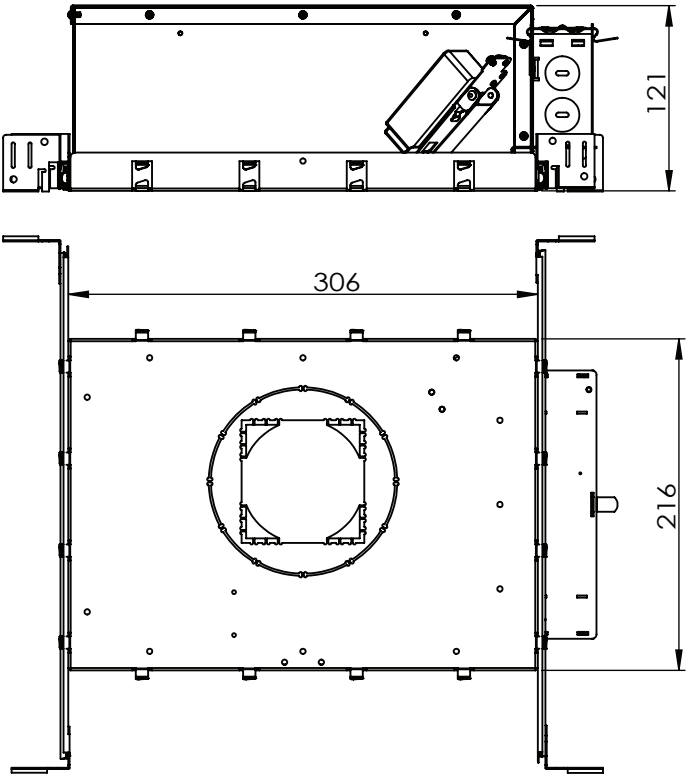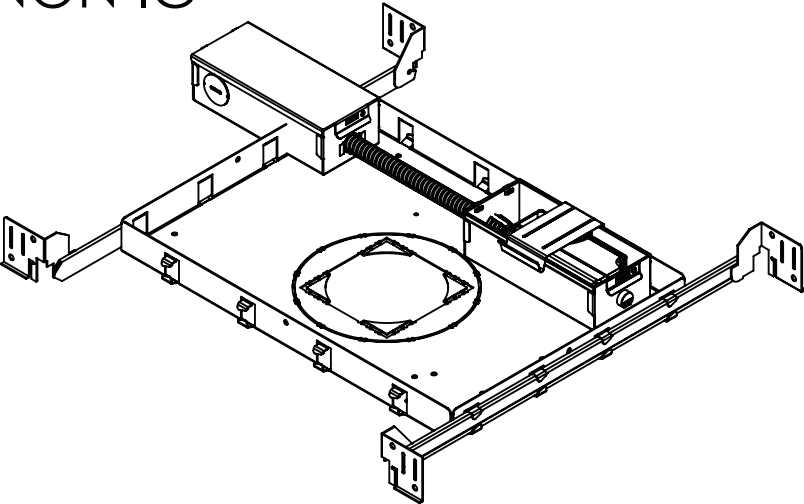

ICBOX

