


SILENTIUM 2" & 3" DRIVER REPLACEMENT - IC BOX




HELIUM LYTE


1. REMOVE TRIM AND DISCONNECT

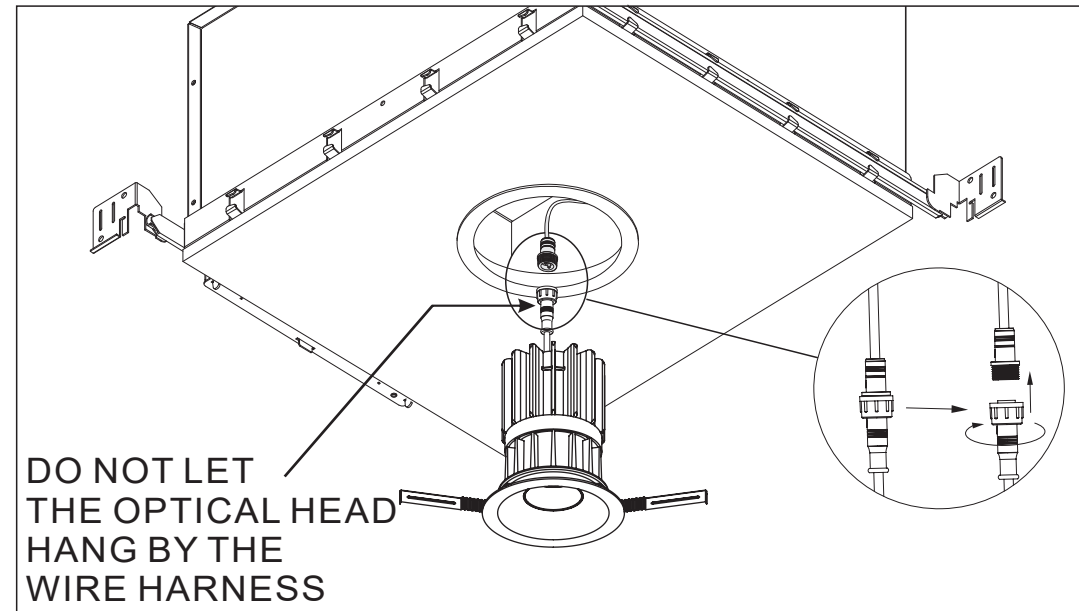

2. PULL DRIVER PLATE OUT OF FRAME

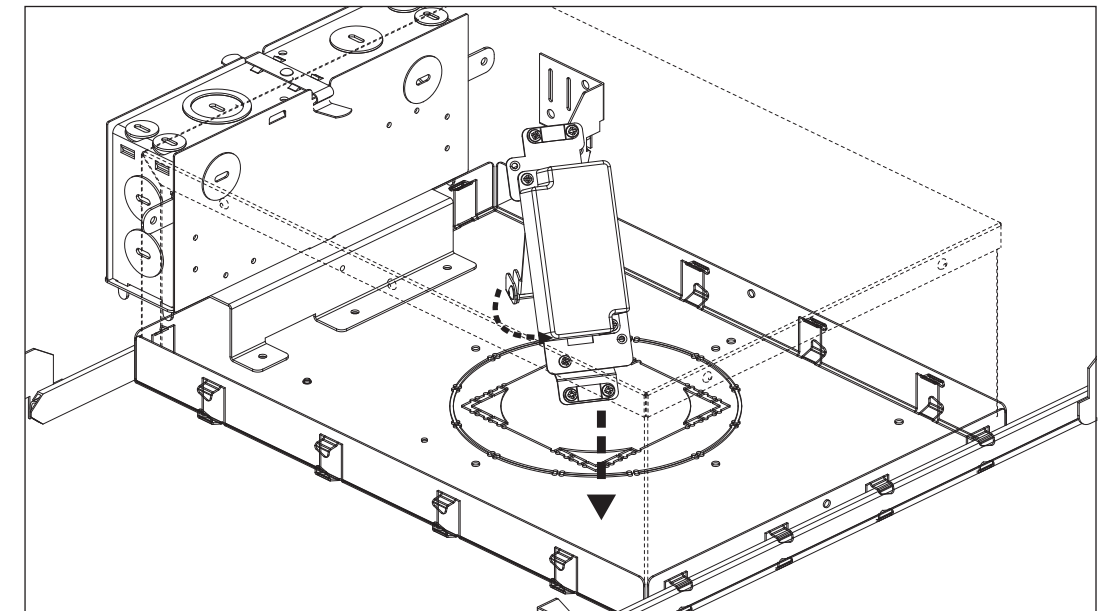

3. PULL DRIVER PLATE OUT OF FRAME

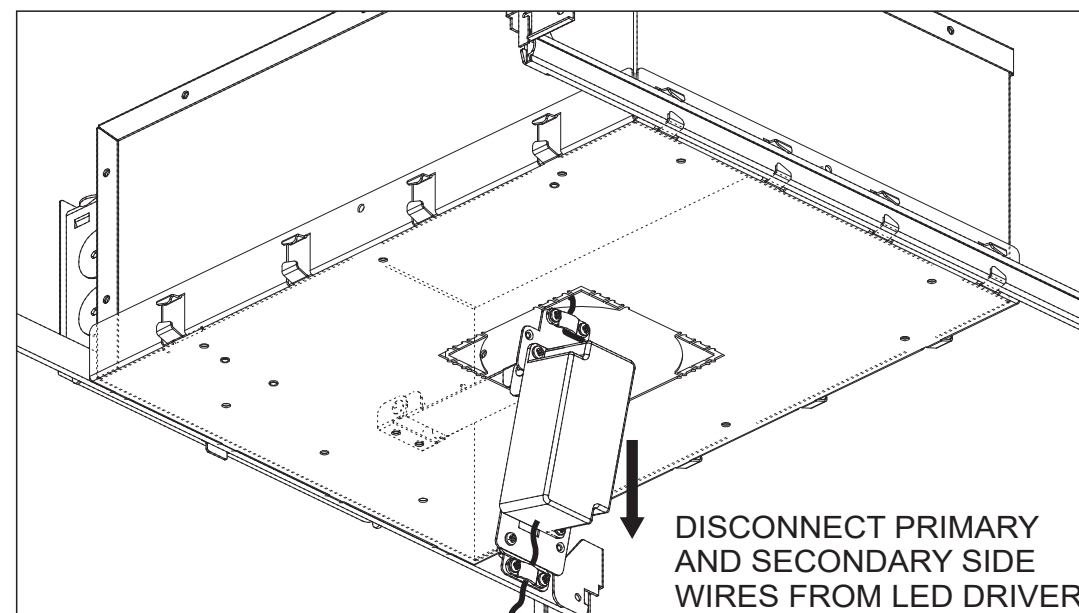

4. REPLACE DRIVER FROM DRIVER PLATE

REMOVE (2x) SCREWS OR (2x) NUTS HOLDING DRIVER TO DRIVER PLATE. REASSEMBLE USING REPLACEMENT DRIVER

