

Type: _____ Qty: _____

Project: _____



HELIUM LYTE

GLOBE



Design Features:

- Easily repositioned on site.
- Premium aluminium & Glass housing.
- Made with high powered OSARAM led chip that maintains high lumens per watt.
- Available with 300° beam angle.
- Specifiable color temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.





GLOBE



*Ref. Image

Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5
GLOBE GLOBE	L450/5W L45/5W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	300 Degree 300D
FINISH 6	ACCESSORIES 7			
White WH Black BLK Gold GLD Silver SLR	Not Applicable NA			

Ordering Code:

1
2
3
4
5
6


7

*Example : GLOBE-L45/5W-30K-DMV-300D-GLD-NA



GLOBE

Mounting Details:

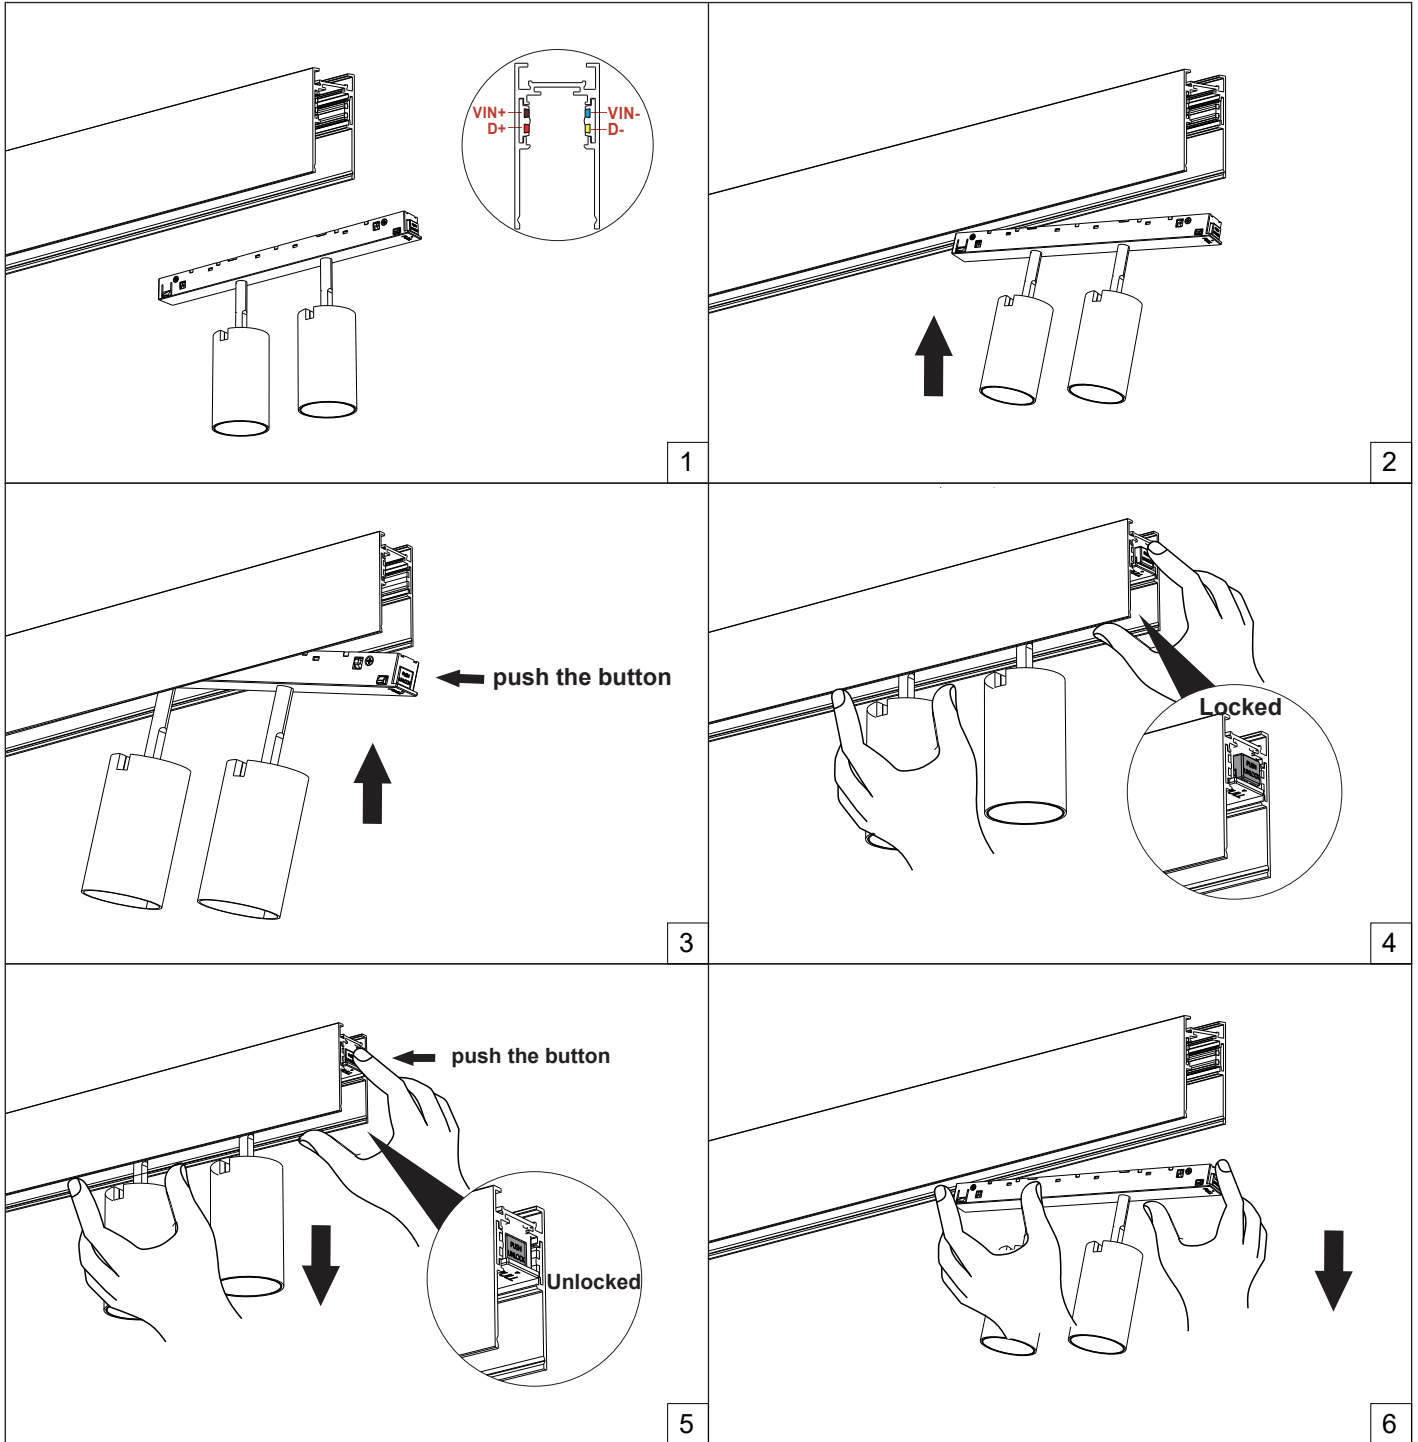




GLOBE

Photometric:

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

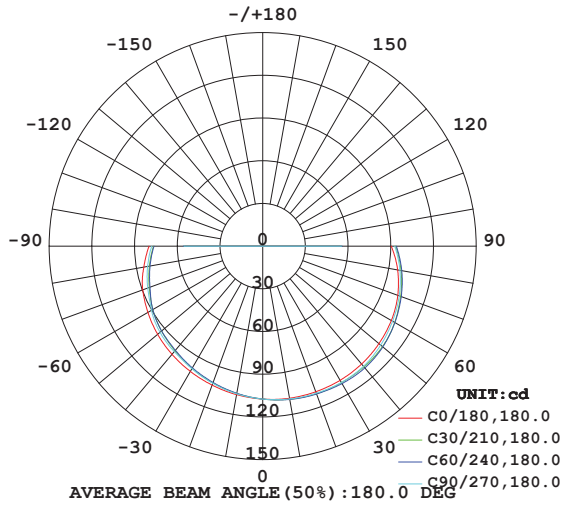

Lighting Chart:

WATT	LUMENS	CCT	CRI
5W	450 lm	3000K	CRI90






GLOBE

Technical Details:

Material	Aluminium & Glass
Head Style	Fixed
Finish	White / Black / Gold / Silver
Lumens	Upto 450lm
Wattage	5W
Efficacy	90 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	300°
Dimming	DALI / 0-10V
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Voltage	120V / 120-277V
Housing	Non IC Rated / IC Rated
Certification	ETL LISTED / DRY RATED



Warranty



Dimming



DALI



Intertek