


Type: _____ Qty: _____

Project: _____



HELIUM LYTE

FOCUS

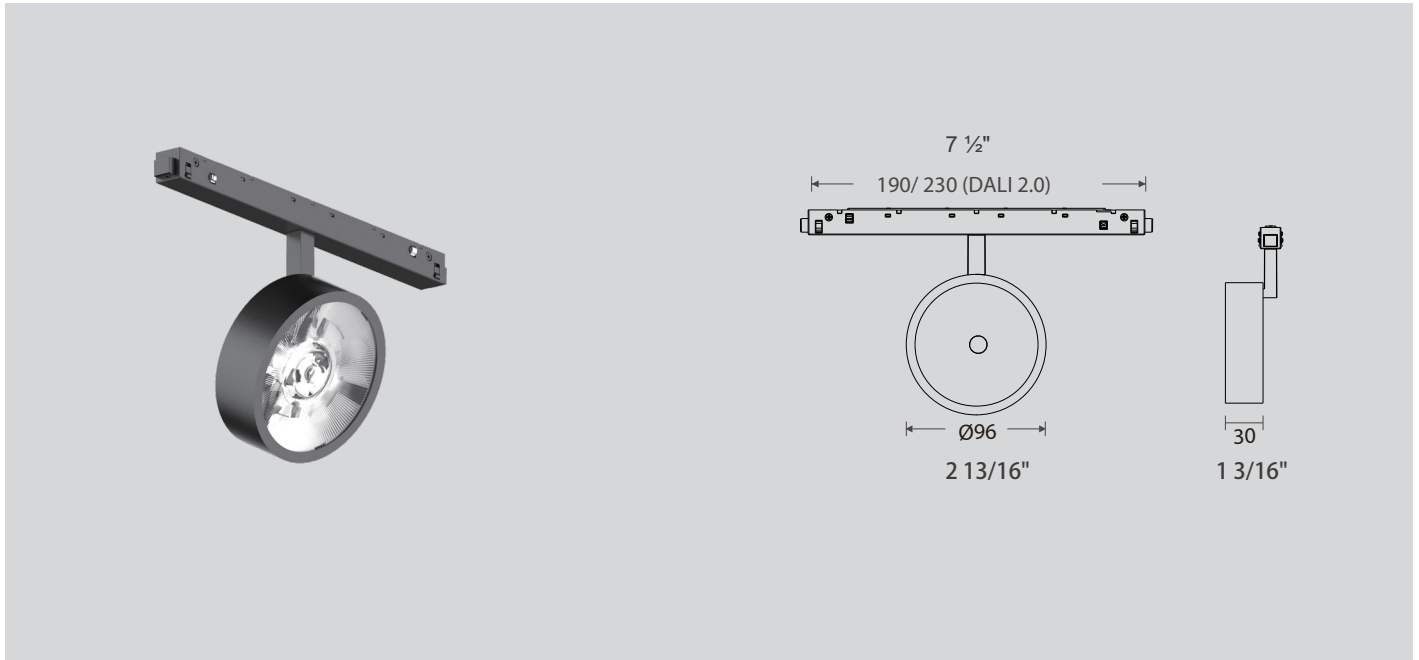

Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSARAM led chip that maintains high lumens per watt.
- Available with 15° / 25° / 35° beam angle.
- Specifiable color temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.



Warranty



Dimming



DALI



Intertek

FOCUS



*Ref. Image

Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5
FOCUS FOCUS	L750/8W L75/8W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	15 Degree 15D 25 Degree 25D 35 Degree 35D
FINISH 6	ACCESSORIES 7			
White WH Black BLK Golden GLD	Not Applicable NA			

Ordering Code:

1
2
3
4
5
6


7

*Example : FOCUS-L75/8W-27K-DMV-25D-BLK-NA



FOCUS

Mounting Details:

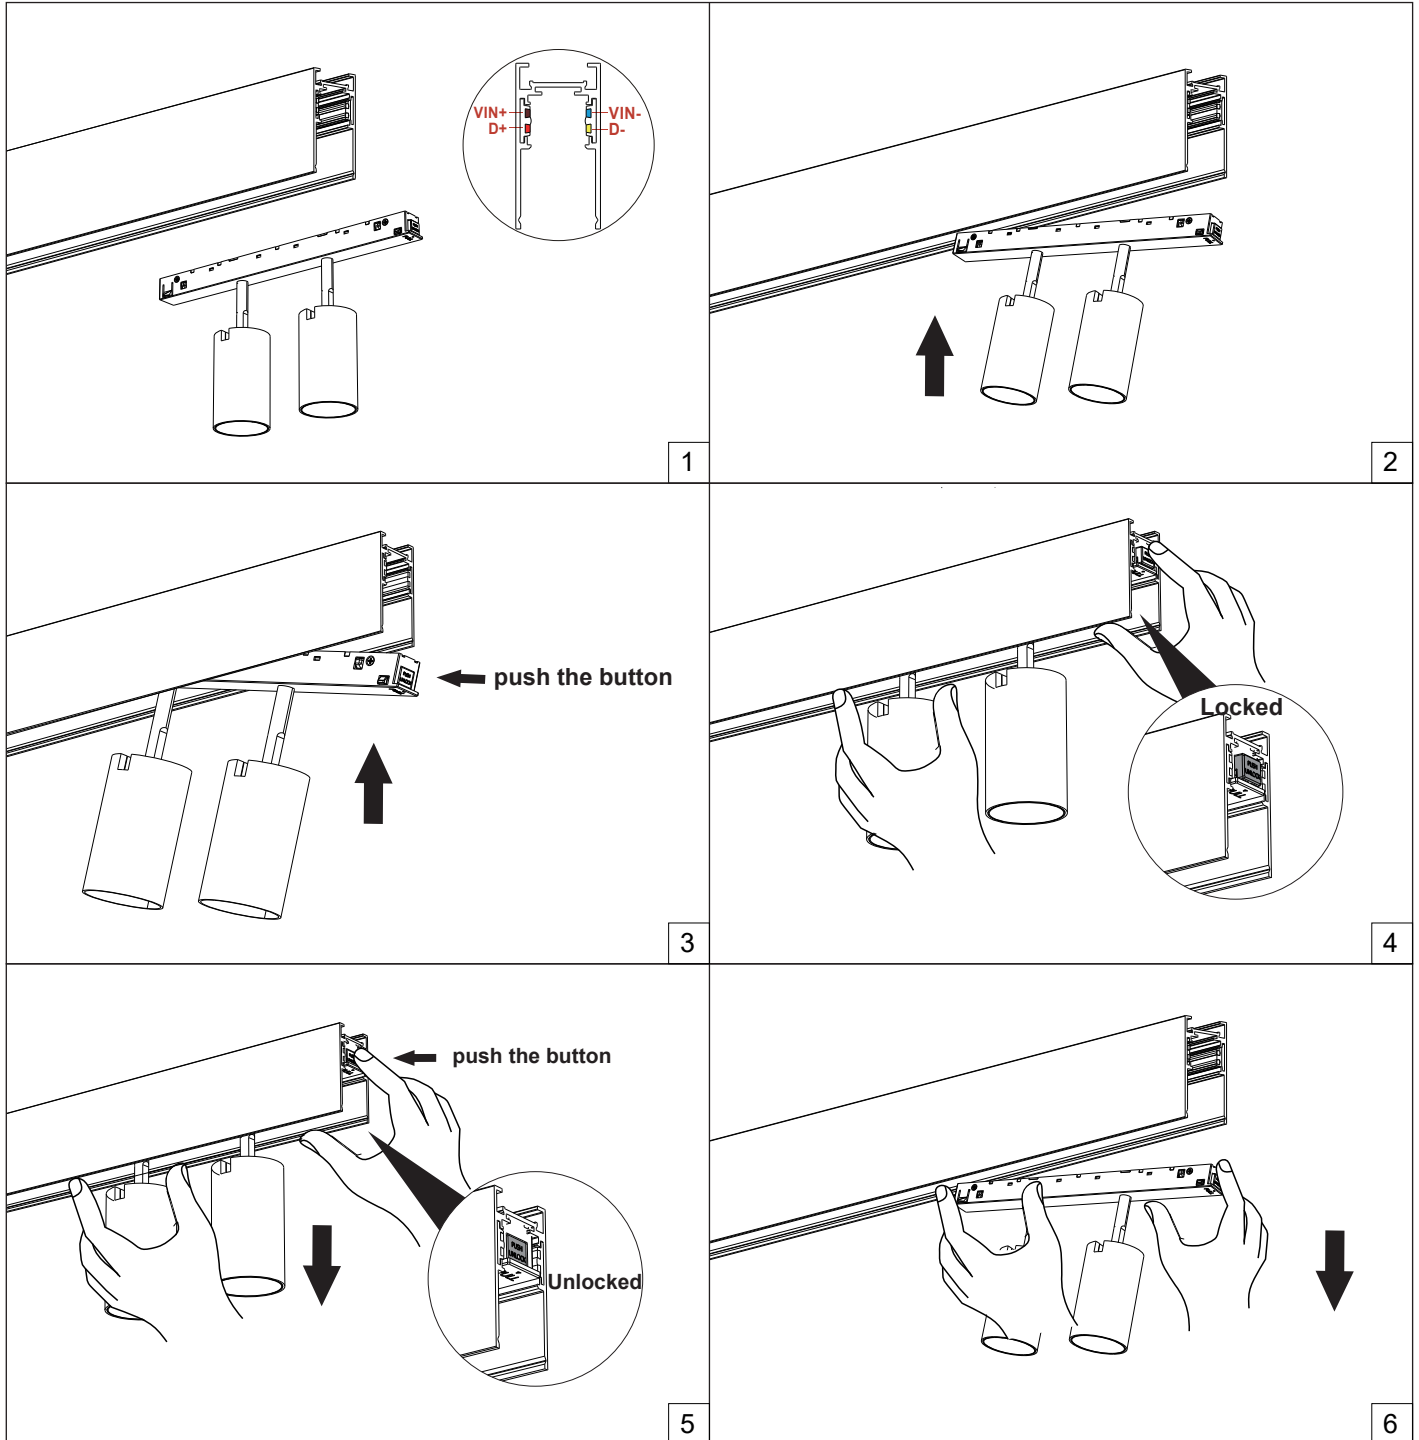



FOCUS

Photometric:

Lighting Chart:

WATT	LUMENS	CCT	CRI
08W	750 lm	3000K	CRI90



Warranty



Dimming



DALI



Intertek



FOCUS

Technical Details:

Material	Extruded Aluminium
Head Style	Fixed
Trim Finish	White / Black / Golden
Lumens	Upto 750lm
Wattage	08W
Efficacy	94 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	15° / 25° / 35°
Dimming	DALI / 0-10V
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Voltage	120V / 120-277V
Housing	Non IC Rated / IC Rated
Certification	ETL LISTED / DRY RATED



Warranty



Dimming



DALI



Intertek