


TRACK



Our versatile track system seamlessly integrates with lighting fixtures, perfect for commercial and residential spaces. Easily configurable in straight or custom patterns, it offers simple installation and adjustment for tailored illumination solutions.

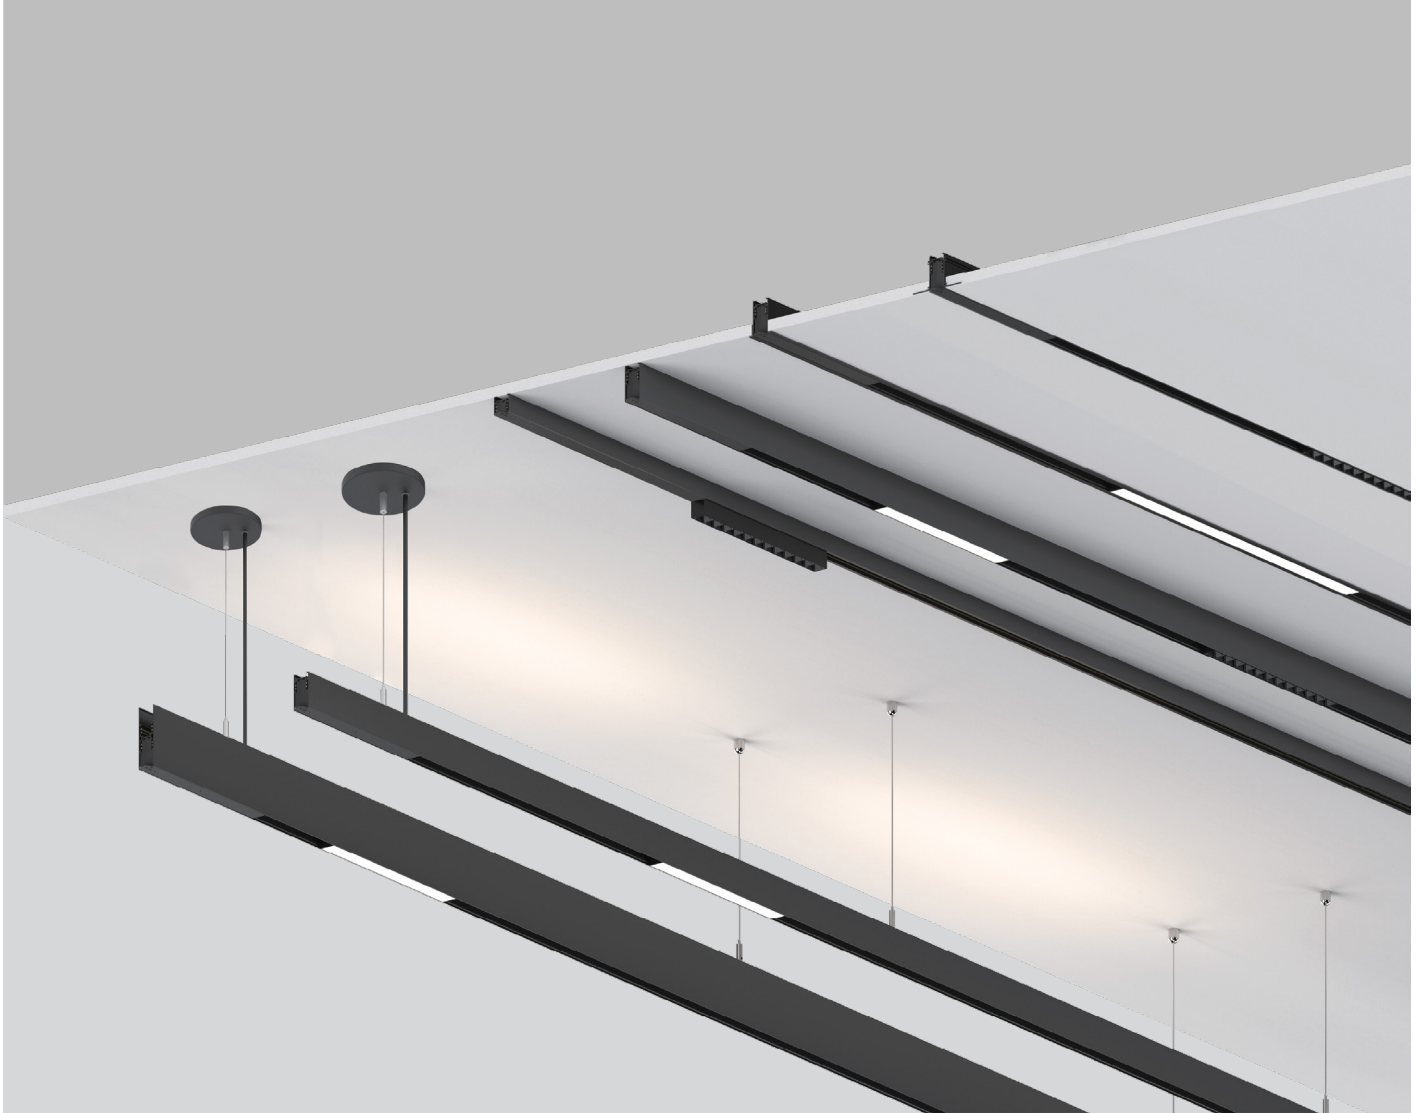

- Seamless Installation and Integration of Helium Track Fixtures.
- Premium extruded aluminum housing.
- Track comes in a 10' Max run length.
- Customizable Run Lengths can be specified.
- High quality powder coating finish.
- Remote constant voltage driver with integral 1% 0-10v and DALI dimming.
- 5 Year warranty.





TRACK

Specs Code:

FIXTURE ID 1	MOUNTING 2	LENGTH 3	FINISH 4	DIMMING 5
Track -Slim TRK-SLIM	Surface SRF	39" 39IN	White -RAL9016 WH	0-10V DMV
	Pendant PEN	78" 78IN	Black -RAL9005 BLK	DALI DALI
Track -High TRK-HIGH	Recessed RCS	118" 118IN	Custom CSTM	
		Custom* CSTM		
		Pattern* PAT		
Track - Recessed Trim TRK-RTM				
Track - Recessed Drywall Mud Flange TRK-RDMF				
Track - Up/Down TRK-UD				
VOLTAGE 6				
120V 120V				
120-277V UNV				

* -Consult factory for custom Length and Pattern.

Order Guide:

1

2

3

4

5

6

*Example : TRK-RDMF-RCS-78IN-BLK-DMV-UNV





TRACK

Possibility of Patterns:

Square




X-Shape



Rectangle



Custom



Note: Consult factory for custom designs.



Dimming



DALI




Intertek


TRACK

Product Drawing :


Slim Track



High Track




Recessed Trim Track

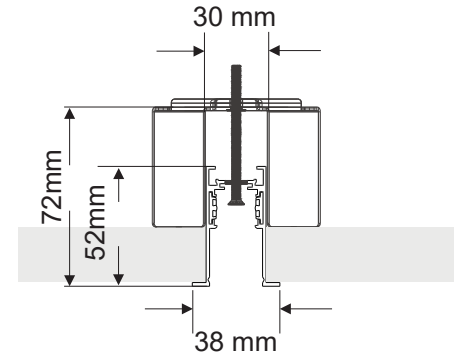


Cutout:  Width 31mm x Length at actual (2010 mm)

Recessed Trimless Track

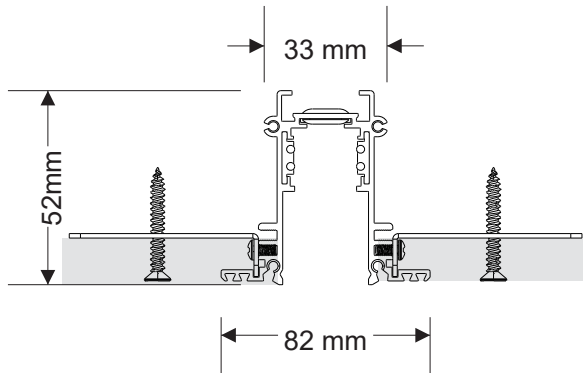

Up / Down Track

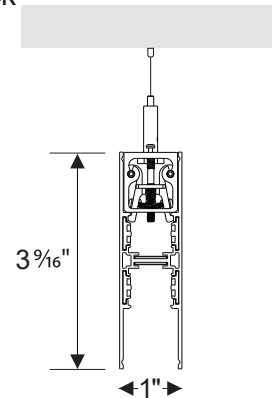

Technical Details:

Material	Extruded Aluminum
Finish	Polyester Powder Coating
Colour	White -RAL9016 / Black -RAL9005 / Custom
Length	39"* / 78"* / 118"* / Custom
Driver	Remote 48v LED Driver
Max Electrical Run	300 W Each Circuit
Dimming	0-10v / TRIAC





TRACK

Track Accessories:



503041-01SE - Slim surface / pendant track Endcap Kit (2pcs/ set)1 set for 1pcs track.

503041-01HE - High surface / pendant track Endcap Kit (2pcs/ set)1 set for 1pcs track.

503041-01RTE - Recessed trim installation track Endcap Kit (2pcs/ set)1 set for 1pcs track.

503041-01RE - Trimless recessed drywall mud flange installation track Endcap Kit (2pcs/ set)1 set for 1pcs track.

503041-01UDE - Updown pendant track Endcap Kit (2pcs/ set)1 set for 1pcs track.

503041-02 - Linear connector with screws.

503041-02A - Linear Connector of H Track System with Screws.

503041-03 - Power feeder unit with feeder cables 500mm for high surface / pendant track.

503041-03A - Two way power feeder unit for high surface / pendant track.

503041-03B - Flexible continuous kit, Electrical.

503041-04 - Straight continuous kit, Electrical.

503041-08SSP - L shape horizontal connector for slim surface / pendant track with linear connector and flexible electrical connector.

503041-08HSP - L shape horizontal connector for high surface / pendant track with linear connector and flexible electrical connector.

503041-08RT - L shape horizontal connector for recessed trim track with linear connector and flexible electrical connector.

503041-08R - L shape horizontal connector for recessed drywall mud flange track with linear connector and flexible electrical connector.

503041-09SSP - L shape vertical connector for slim surface / pendant track.

503041-09HSP - L shape vertical connector for high surface / pendant track.

503041-09RT - L shape vertical connector for recessed trim track.

503041-09R - L shape vertical connector for recessed drywall mud flange track.

503041-10SSP - L Shape outer connector for slim surface / pendant track.

503041-10HSP - L Shape outer connector for high surface / pendant track.

503041-10RT - L Shape outer connector for recessed trim track.

503041-10R - L Shape outer connector for recessed drywall mud flange track.

503041-12SP - T-Shape connector for Slim,High,Updown-surface / pendant track with linear connector and flexible electrical connector.

503041-12R - T-Shape connector for recessed drywall mud flange track with linear connector and flexible electrical connector.

503041-12RT - T-Shape connector for recessed trim track with linear connector and flexible electrical connector.

503041-13SP - X shape connector for Slim,High,Updown-surface / pendant track.

503041-13RT - X shape connector for recessed trim track.

503041-13R - X shape connector for recessed drywall mud flange track.

503041-14 - Pendant wire kits for Slim,High Track, standard length: 2,000mm 2pcs/set for 39" track.

503041-15 - 1pcs ceiling box for power feeder with 2pcs pendant wire kits for Slim,High Track, length: 2,000mm.

503041-15A - 1pcs ceiling box for power feeder with 2pcs pendant wire kits for up-down track,standard length: 2,000mm 2pcs/set for 39" track.

503041-15B - Linear connector pendant wire kits standard length:2,000mm.

503041-16 - 2 Nos. of Screw & Wall Plug kit.

503041-17 - 2 set for every continuous 1,000mm track with screw, (2pcs/ set) for recessed trim track.



TRACK INSERTS





SPOT 3



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSRAM led chip that maintains high lumens per watt.
- Available with 18°/ 30°/ 45° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID	1	LUMENS / WATT	2	LED OPTION	3	DIMMING	4	BEAM ANGLE	5	FINISH	6	ACCESSORIES	7
SPOT-3	SPOT3	L180/3W	L18/3W	2700K 3000K 3500K 4000K	27K 30K 35K 40K	0-10V DALI	DMV DALI	18 Degree 30 Degree 45 Degree	18D 30D 45D	White Black	WH BLK	Not Applicable	NA

Ordering Code:

1

2

3


4

5


6

7


*Example : SPOT3-L18/3W-27K-DMV-45D-BLK-NA




03W-18D



03W-30D



03W-45D



WATT	LUMENS	CCT	CRI
03W	180 lm	3000K	CRI90





SPOT 8



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered CITIZEN led chip that maintains high lumens per watt.
- Available with 18°/ 30°/ 45° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID	1	LUMENS / WATT	2	LED OPTION	3	DIMMING	4	BEAM ANGLE	5	FINISH	6	ACCESSORIES	7
SPOT-8	SPOT8	L580/8W -For 18° & 30°	L58/8W	2700K 3000K 3500K 4000K	27K 30K 35K 40K	0-10V DALI	DMV DALI	18 Degree 30 Degree 45 Degree	18D 30D 45D	White Black	WH BLK	Not Applicable	NA
		L420/8W -For 45°	L42/8W										

Ordering Code:

1

2

3


4

5


6

7


*Example : SPOT8-L58/8W-27K-DMV-45D-BLK-NA

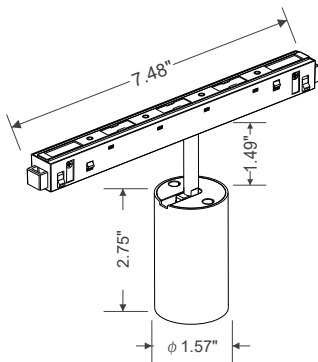


08W-18D



08W-30D



08W-45D



WATT	LUMENS	CCT	CRI
08W	580 lm	3000K	CRI90





SPOT 12



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered CITIZEN led chip that maintains high lumens per watt.
- Available with 18°/ 30°/ 45° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID	1	LUMENS / WATT	2	LED OPTION	3	DIMMING	4	BEAM ANGLE	5	FINISH	6	ACCESSORIES	7
SPOT-12	SPOT12	L750/12W -For 18° & 30°	L75/12W	2700K 3000K 3500K 4000K	27K 30K 35K 40K	0-10V DALI	DMV DALI	18 Degree 30 Degree 45 Degree	18D 30D 45D	White Black	WH BLK	Not Applicable	NA
		L600/12W -For 45°	L60/12W										

Ordering Code:

1

2

3


4

5


6

7


*Example : SPOT12-L75/12W-27K-DMV-45D-BLK-NA

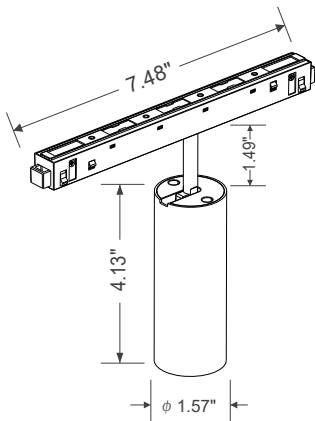


12W-18D



12W-30D



12W-45D



WATT	LUMENS	CCT	CRI
12W	750 lm	3000K	CRI90





SPOT DUO 5



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSRAM led chip that maintains high lumens per watt.
- Available with 18°/ 30°/ 45° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.


Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5	FINISH 6	ACCESSORIES 7
SPOT DUO-5	L350/5W L35/5W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	18 Degree 18D 30 Degree 30D 45 Degree 45D	White WH Black BLK	Not Applicable NA


Ordering Code:

1	2	3	4	5	6	7


*Example : SPOTD5-L35/5W-27K-DMV-45D-BLK-NA




05W-18D



05W-30D



05W-45D



WATT	LUMENS	CCT	CRI
05W	350 lm	3000K	CRI90



Dimming



DALI



Intertek



SPOT DUO 16



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered CITIZEN led chip that maintains high lumens per watt.
- Available with 18°/ 30°/ 45° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID	1	LUMENS / WATT	2	LED OPTION	3	DIMMING	4	BEAM ANGLE	5	FINISH	6	ACCESSORIES	7
SPOT DUO-16	SPOTD16	L1100/16W L110/16W -For 18° & 30°		2700K 3000K 3500K 4000K	27K 30K 35K 40K	0-10V DALI	DMV DALI	18 Degree 30 Degree 45 Degree	18D 30D 45D	White Black	WH BLK	Not Applicable	NA
		L850/16W L85/16W -For 45°											

Ordering Code:

1

2

3


4

5


6

7


*Example : SPOTD16-L85/16W-27K-DMV-45D-BLK-NA

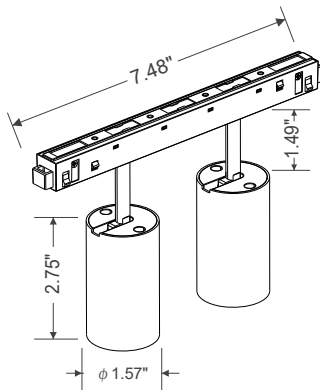


16W-18D



16W-30D



16W-45D



WATT	LUMENS	CCT	CRI
16W	1100 lm	3000K	CRI90



Dimming



DALI



Intertek



SPOT DUO 24



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered CITIZEN led chip that maintains high lumens per watt.
- Available with 18°/ 30°/ 45° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID	1	LUMENS / WATT	2	LED OPTION	3	DIMMING	4	BEAM ANGLE	5	FINISH	6	ACCESSORIES	7
SPOT DUO-24	SPOTD24	L1500/24W -For 18° & 30°	L110/24W	2700K 3000K 3500K 4000K	27K 30K 35K 40K	0-10V DALI	DMV DALI	18 Degree 30 Degree 45 Degree	18D 30D 45D	White Black	WH BLK	Not Applicable	NA
		L1200/24W -For 45°	L120/24W										

Ordering Code:

1

2

3


4

5


6

7


*Example : SPOTD24-L150/24W-27K-DMV-45D-BLK-NA

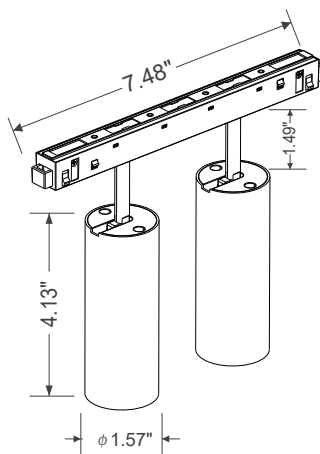


24W-18D



24W-30D



24W-45D



WATT	LUMENS	CCT	CRI
24W	1500 lm	3000K	CRI90



Dimming



DALI



Intertek



CELL 2 HEAD



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSRAM led chip that maintains high lumens per watt.
- Available with 20° / 35° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID ¹	LUMENS / WATT ²	LED OPTION ³	DIMMING ⁴	BEAM ANGLE ⁵	FINISH ⁶	ACCESSORIES ⁷
CELL 2 HEAD CELL2H	L180/3W L18/3W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	20 Degree 20D 35 Degree 35D	White WH Black BLK	Not Applicable NA

Ordering Code:

¹

²

³

⁴

⁵


⁶

⁷


*Example : CELL2H-L18/3W-27K-DMV-35D-BLK-NA



3W-20D



3W-35D



WATT	LUMENS	CCT	CRI
3W	180 lm	3000K	CRI90



Dimming



DALI



Intertek



CELL 6 HEAD



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSRAM led chip that maintains high lumens per watt.
- Available with 20°/ 35° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID ¹	LUMENS / WATT ²	LED OPTION ³	DIMMING ⁴	BEAM ANGLE ⁵	FINISH ⁶	ACCESSORIES ⁷
CELL 6 HEAD CELL6H	L550/7W L55/7W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	20 Degree 20D 35 Degree 35D	White WH Black BLK	Not Applicable NA

Ordering Code:

¹

²

³

⁴

⁵


⁶

⁷


*Example : CELL6H-L55/7W-27K-DMV-35D-BLK-NA




7W-20D



7W-35D



WATT	LUMENS	CCT	CRI
7W	550 lm	3000K	CRI90





CELL 8 HEAD



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSRAM led chip that maintains high lumens per watt.
- Available with 20°/ 35° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID ¹	LUMENS / WATT ²	LED OPTION ³	DIMMING ⁴	BEAM ANGLE ⁵	FINISH ⁶	ACCESSORIES ⁷
CELL 8 HEAD CELL8H	L750/9W L75/9W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	20 Degree 20D 35 Degree 35D	White WH Black BLK	Not Applicable NA

Ordering Code:

¹

²

³


⁴

⁵


⁶

⁷


*Example : CELL8H-L75/9W-27K-DMV-35D-BLK-NA



9W-20D



9W-35D



WATT	LUMENS	CCT	CRI
9W	750 lm	3000K	CRI90





CELL 12 HEAD



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSRAM led chip that maintains high lumens per watt.
- Available with 20° / 35° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

L700/10W
-For 25°

L70/10W

L750/10W
-For 36° & 50°

L75/10W

Specs Code:

FIXTURE ID ¹	LUMENS / WATT ²	LED OPTION ³	DIMMING ⁴	BEAM ANGLE ⁵	FINISH ⁶	ACCESSORIES ⁷
CELL 12 HEAD CELL12H	L1100/13W L110/13W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	20 Degree 20D 35 Degree 35D	White WH Black BLK	Not Applicable NA

Ordering Code:

¹

²

³


⁴

⁵


⁶

⁷


*Example : CELL12H-L110/13W-27K-DMV-35D-BLK-NA



13W-20D



13W-35D



WATT	LUMENS	CCT	CRI
13W	1100 lm	3000K	CRI90



Dimming



DALI



Intertek



SPOT 10



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSRAM led chip that maintains high lumens per watt.
- Available with 25°/ 36°/ 50° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID	1	LUMENS / WATT	2	LED OPTION	3	DIMMING	4	BEAM ANGLE	5	FINISH	6	REFLECTOR	7
SPOT-10	SPOT10	L700/10W -For 25°	L70/10W	2700K 3000K 3500K 4000K	27K 30K 35K 40K	0-10V DALI	DMV DALI	25 Degree 36 Degree 50 Degree	25D 36D 50D	White Black Golden	WH BLK GLD	White Black Chrome Black Golden	WH BLK CBLK GLD

Ordering Code:

1

2

3


4

5


6

7


*Example : SPOT10-L70/10W-27K-DMV-50D-BLK-BLK




10W-25D



10W-36D



10W-50D



WATT	LUMENS	CCT	CRI
10W	750 lm	3000K	CRI90





SPOT 20



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSRAM led chip that maintains high lumens per watt.
- Available with 25°/ 36°/ 50° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID		1	LUMENS / WATT		2	LED OPTION		3	DIMMING		4	BEAM ANGLE		5	FINISH		6	REFLECTOR		7
SPOT-20	SPOT20	L1400/20W L140/20W -For 25°	2700K 3000K 3500K 4000K	27K 30K 35K 40K	0-10V DALI	DMV DALI	25 Degree 36 Degree 50 Degree	25D 36D 50D	White Black Golden	WH BLK GLD	White Black Crome Black Golden	WH BLK CBLK GLD								

Ordering Code:

1

2

3


4

5


6

7


*Example : SPOT20-L150/20W-27K-DMV-50D-BLK-BLK




10W-25D



10W-36D



10W-50D



WATT	LUMENS	CCT	CRI
20W	1500 lm	3000K	CRI90



SPOT CYLINDRICAL PENDANT 12



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered CITIZEN led chip that maintains high lumens per watt.
- Available with 18°/ 30°/ 45° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5	FINISH 6	ACCESSORIES 7
SPOT CYL12 CYLINDRICAL PENDANT-12	L750/12W L75/12W -For 18° & 30° L600/12W L60/12W -For 45°	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	18 Degree 18D 30 Degree 30D 45 Degree 45D	White WH Black BLK	Not Applicable NA

Ordering Code:

1

2

3


4

5


6

7


*Example : CYL12-L75/12W-27K-DMV-45D-BLK-NA




08W-18D



08W-30D



08W-45D



WATT	LUMENS	CCT	CRI
12W	600 lm	3000K	CRI90



SPOT CYLINDRICAL PENDANT 14



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered CITIZEN led chip that maintains high lumens per watt.
- Available with 18°/ 24°/ 36°/ 50° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5	FINISH 6	ACCESSORIES 7
SPOT CYLINDRICAL PENDANT-14	L950/14W L95/14W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	18 Degree 18D 24 Degree 24D 36 Degree 36D 50 Degree 50D	White WH Black BLK	Not Applicable NA

Ordering Code:

1

2

3


4

5


6

7


*Example : CYL14-L95/14W-27K-DMV-36D-BLK-NA




14W-18D



14W-24D



14W-36D



WATT	LUMENS	CCT	CRI
14W	950 lm	3000K	CRI90





SPOT ZOOMABLE 10



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered CITIZEN led chip that maintains high lumens per watt.
- Zoom lens from 20° - 40° / 35° - 60° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID ¹	LUMENS / WATT ²	LED OPTION ³	DIMMING ⁴	BEAM ANGLE ⁵	FINISH ⁶	ACCESSORIES ⁷
SPOT ZOOMABLE -10	L800/10W L80/10W -For 20° & 35° L750/10W L75/10W -For 40° & 60°	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	20° - 40° 20D-40D 35° - 60° 35D-60D	White WH Black BLK	Not Applicable NA

Ordering Code:

1

2

3


4

5


6

7


*Example : SPOTZ10-L80/10W-27K-DMV-20D-40D-BLK-NA




10W-18D



10W-35D



10W-40D



WATT	LUMENS	CCT	CRI
10W	800 lm	3000K	CRI90



Dimming




DALI



Intertek



ADJUSTABLE 7

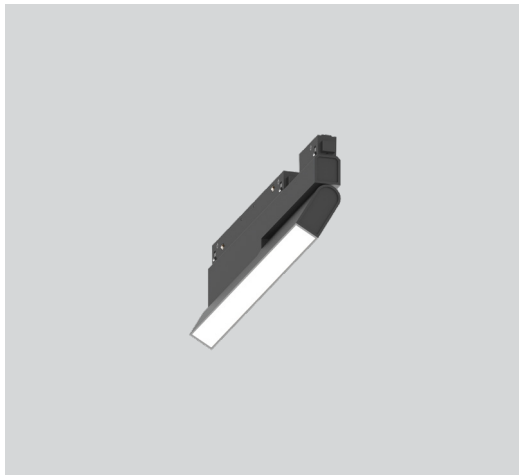

Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered SAMSUNG led chip that maintains high lumens per watt.
- Available with 110° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.


Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5	FINISH 6	ACCESSORIES 7
ADJUSTABLE ADJ7-7	L400/7W L40/7W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	110 Degree 110D	White WH Black BLK	Not Applicable NA


Ordering Code:

1	2	3	4	5	6	7

*Example : ADJ7-L40/7W-27K-DMV-110D-BLK-NA



7W-110D



WATT	LUMENS	CCT	CRI
7W	400 lm	3000K	CRI90





CELL 12 HEAD ADJUSTABLE



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSARAM led chip that maintains high lumens per watt.
- Available with 20°/ 35° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.


Specs Code:

FIXTURE ID	1	LUMENS / WATT	2	LED OPTION	3	DIMMING	4	BEAM ANGLE	5	FINISH	6	ACCESSORIES	7
CELL-12HEAD ADJUSTABLE	CELL 12HADJ	L1100/13W	L110/13W	2700K 3000K 3500K 4000K	27K 30K 35K 40K	0-10V DALI	DMV DALI	20 Degree 35 Degree	20D 35D	White Black	WH BLK	Not Applicable	NA


Ordering Code:

1	2	3	4	5	6	7


*Example : ADJ13-L110/13W-27K-DMV-35D-BLK-NA



13W-20D



13W-35D



WATT	LUMENS	CCT	CRI
13W	1100 lm	3000K	CRI90



Dimming




DALI



Intertek



LIN-GA/LG

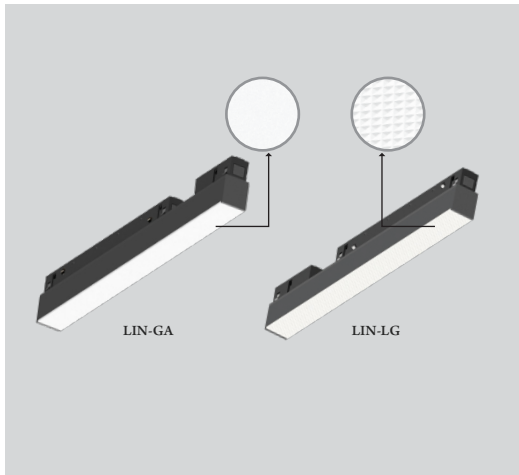

Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered SAMSUNG led chip that maintains high lumens per watt.
- Available with 65°/ 110° beam angle.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID	1	LUMENS / WATT	2	LED OPTION	3	DIMMING	4	BEAM ANGLE	5	FINISH	6	ACCESSORIES	7
LIN-GA	LINGA	L400/7W	L40/7W	2700K	27K	0-10V	DMV	110 Degree	110D	White	WH	Not Applicable	NA
LIN-LG	LINLG	L800/13W	L80/13W	3000K	30K	DALI	DALI			Black	BLK		
		L1200/19W	L120/19W	3500K	35K								
		L1600/26W	L160/26W	4000K	40K								
		-Above for LIN-GA											

Ordering Code:

1

2

3


4

5


6

7


*Example : ADJ7-L40/7W-27K-DMV-110D-BLK-NA




7W-110D



13W-35D



WATT	LUMENS-GA	LUMENS-LG	CCT	CRI
07W	400 lm	380 lm	3000K	CRI90
13W	800 lm	750 lm	3000K	CRI90
19W	1200 lm	1100 lm	3000K	CRI90
26W	1600 lm	1500 lm	3000K	CRI90





TRACK WALL WASH



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered SAMSUNG led chip that maintains high lumens per watt.
- Specifiable colour temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5	FIXTURE SIZE 6	FINISH 7
TRACK WALLWASH TWW	L350/7W L35/7W L700/13W L70/13W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	Wall Washer WW	7W -11 Inch 11IN 13W -22 Inch 22IN	White WH Black BLK

Ordering Code:

1

2

3


4

5


6

7

*Example : TWW-L70/13W-27K-DMV-WW-22IN-BLK

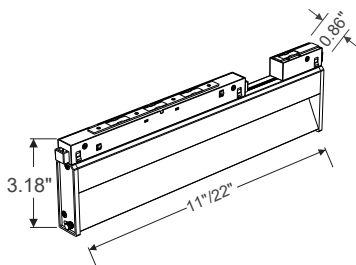

7W-WALL WASHER



WATT	LUMENS	CCT	CRI
07W	350 lm	3000K	CRI90
13W	700 lm	3000K	CRI90



Dimming




DALI



Intertek

CUBIC 10

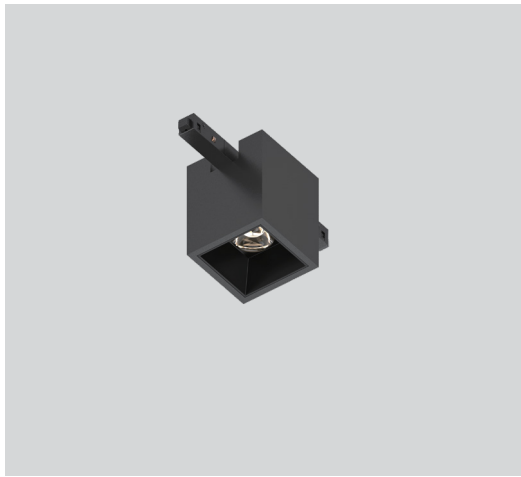

Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSARAM led chip that maintains high lumens per watt.
- Available with 30° beam angle.
- Specifiable color temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.



Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5	FINISH 6	ACCESSORIES 7
CUBIC-10 CUBIC10	L1000/10W L100/10W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	30 Degree 30D	White WH Black BLK	Not Applicable NA

Ordering Code:

1
2
3
4
5
6
7

*Example : CUBIC10-L100/10W-27K-DMV-30D-BLK-NA



WATT	LUMENS	CCT	CRI
10W	1000 lm	3000K	CRI90



ORBIT 10



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSARAM led chip that maintains high lumens per watt.
- Available with 30° beam angle.
- Specifiable color temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.



Specs Code:

FIXTURE ID ¹	LUMENS / WATT ²	LED OPTION ³	DIMMING ⁴	BEAM ANGLE ⁵	FINISH ⁶	ACCESSORIES ⁷
ORBIT-10 ORBIT10	L900/10W L90/10W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	30 Degree 30D	White WH Black BLK	Not Applicable NA

Ordering Code:

1
2
3
4
5
6
7

*Example : ORBIT10-L90/10W-27K-DMV-30D-BLK-NA



WATT	LUMENS	CCT	CRI
10W	900 lm	3000K	CRI90





FOCUS



Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSARAM led chip that maintains high lumens per watt.
- Available with 15° / 25° / 35° beam angle.
- Specifiable color temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID	1	LUMENS / WATT	2	LED OPTION	3	DIMMING	4	BEAM ANGLE	5	FINISH	6	ACCESSORIES	7
FOCUS	FOCUS	L750/8W	L75/8W	2700K 3000K 3500K 4000K	27K 30K 35K 40K	0-10V DALI	DMV DALI	15 Degree 25 Degree 35 Degree	15D 25D 35D	White Black	WH BLK	Not Applicable	NA

Ordering Code:

1

2

3


4

5


6

7


*Example : FOCUS-L75/8W-27K-DMV-25D-BLK-NA




8W-15D



8W-25D



8W-35D



WATT	LUMENS	CCT	CRI
8W	750 lm	3000K	CRI90



TWIG



Design Features:

- Easily repositioned on site.
- Premium aluminium & Glass housing.
- Made with high powered OSARAM led chip that maintains high lumens per watt.
- Available with 360° beam angle.
- Specifiable color temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID	1	LUMENS / WATT	2	LED OPTION	3	DIMMING	4	BEAM ANGLE	5	FINISH	6	ACCESSORIES	7
TWIG	TWIG	L1700/20W	L170/20W	2700K 3000K 3500K 4000K	27K 30K 35K 40K	0-10V DALI	DMV DALI	360 Degree	360D	White Black Gold Silver	WH BLK GLD SLR	Not Applicable	NA

Ordering Code:

1

2

3

4

5

6

7

*Example : TWIG-L170/20W-27K-DMV-360D-BLK-NA



WATT	LUMENS	CCT	CRI
20W	1700 lm	3000K	CRI90





GLOBE



Design Features:

- Easily repositioned on site.
- Premium aluminium & Glass housing.
- Made with high powered OSARAM led chip that maintains high lumens per watt.
- Available with 300° beam angle.
- Specifiable color temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.

Specs Code:

FIXTURE ID	1	LUMENS / WATT	2	LED OPTION	3	DIMMING	4	BEAM ANGLE	5	FINISH	6	ACCESSORIES	7
GLOBE	GLOBE	L450/5W	L45/5W	2700K 3000K 3500K 4000K	27K 30K 35K 40K	0-10V DALI	DMV DALI	300 Degree	300D	White Black Gold Silver	WH BLK GLD SLR	Not Applicable	NA

Ordering Code:

1	2	3	4	5	6	7

*Example : GLOBE-L45/5W-27K-DMV-300D-BLK-NA



WATT	LUMENS	CCT	CRI
5W	450 lm	3000K	CR190

