


Type: \_\_\_\_\_ Qty: \_\_\_\_\_

Project: \_\_\_\_\_



HELIUM LYTE

# RECESSED TRIMLESS TRACK

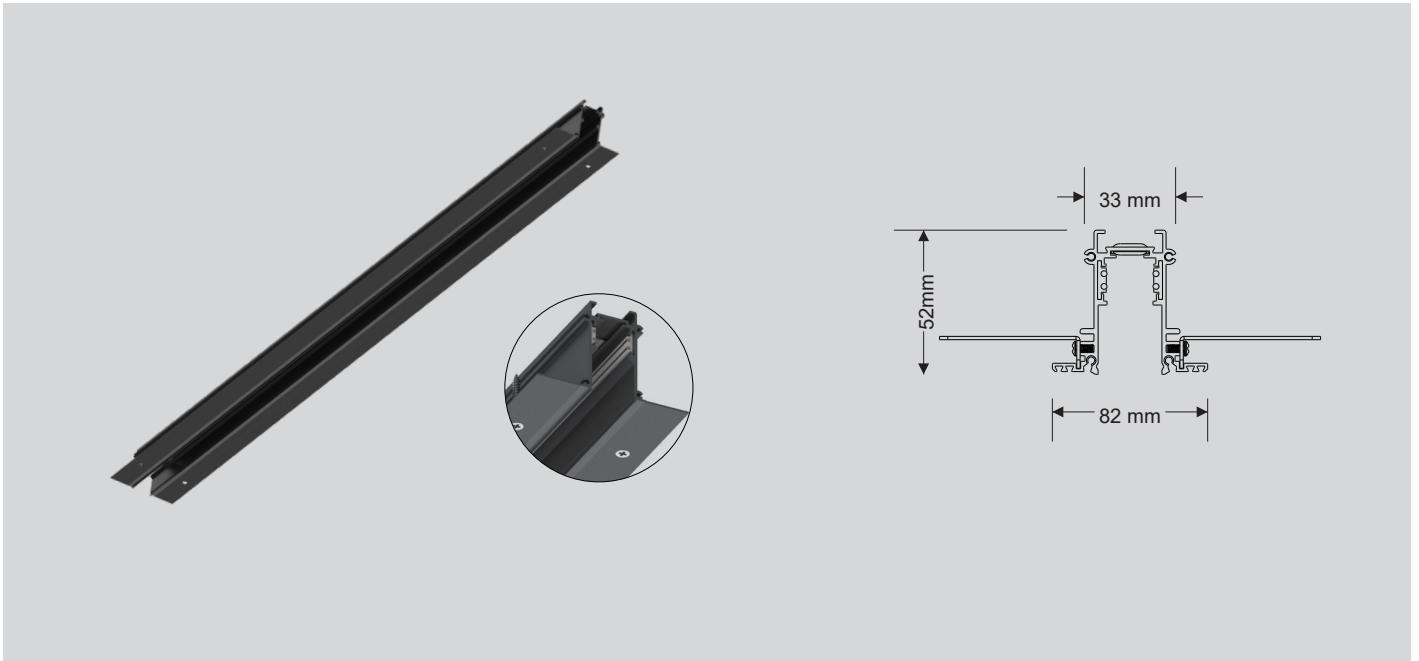

## Description:

Our versatile track system seamlessly integrates with lighting fixtures, perfect for commercial and residential spaces. Easily configurable in straight or custom patterns, it offers simple installation and adjustment for tailored illumination solutions.

## Design Features:

- Seamless installation and integration of helium track fixtures.
- Premium extruded aluminium housing.
- Track comes in a 10' max run length.
- Customizable run lengths can be specified.
- High quality powder coating finish.
- Remote constant voltage driver with integral 1% 0-10v and DALI dimming.
- 5 Year warranty.



Dimming



DALI



Intertek

# RECESSED TRIMLESS TRACK



\*Ref. Image

## Specs Code:

FIXTURE ID1	LENGTH2	FINISH3	DIMMING4	VOLTAGE5	
Track - TRK-RDMF Recessed Drywall Mud Flange	39"	39IN	White -RAL9016WH	0-10VDMV	120V120V
	78"	78IN	Black -RAL9005BLK	DALIDALI	120-277VUNV
	118"	118IN	CustomCSTM		
	Custom*	CSTM			
	Pattern*	PAT			

\* -Consult factory for custom Length and Pattern.

## Order Guide:

1
2
3
4
5


\*Example : TRK-RDMF-78IN-BLK-DMV-UNV





# RECESSED TRIMLESS TRACK

## Mounting Options:

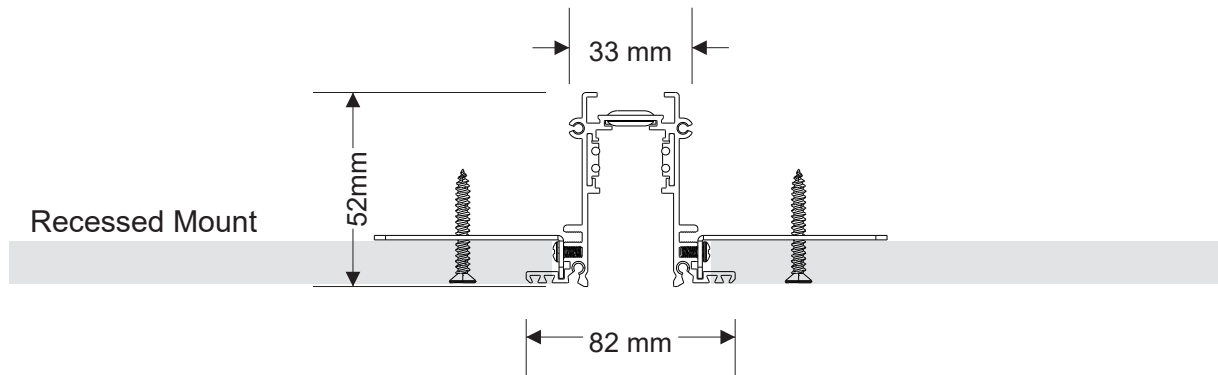

Cutout:  Width 40mm x Length at actual (2010 mm)

## Standard Length



# RECESSED TRIMLESS TRACK

## Technical Details:

Material	Extruded Aluminum
Finish	Polyester Powder Coating
Colour	White -RAL9016 / Black -RAL9005 / Custom
Length	39"* / 78"* / 118"* / Custom
Driver	Remote 48v LED Driver
Max Electrical Run	300 W Each Circuit
Dimming	0-10V / TRIAC
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Voltage	120V / 120-277V
Certification	ETL LISTED / DRY RATED

## Disclaimers:

- Standard track lengths includes 2 end caps.
- For custom patterns architectural drawings must be provided.
- Tracks are field cuttable.
- Track system does not include track lighting inserts.





# RECESSED TRIMLESS TRACK

Track Jointer Configuration:

Possibility of Patterns:

Square




X-Shape



Rectangle



Custom



Note: Consult factory for custom designs.



Dimming




DALI



Intertek

# RECESSED TRIMLESS TRACK

## Accessories:



503041-01RE




503041-02



503041-03



503041-03A




503041-04




503041-08R




503041-09R




503041-10R



503041-11



503041-12R



503041-13R



503041-16

## Accessories Code Guide:

**503041-01RE** - Trimless recessed drywall mud flange installation track Endcap Kit (2pcs/ set)1 set for 1pcs track.

**503041-02** - Linear connector with screws.

**503041-03** - Power feeder unit with feeder cables 500mm for recessed mounted.

**503041-03A** - Two way power feeder unit for recessed mounted.

**503041-04** - Straight continuous kit, Electrical.

**503041-08R** - L shape horizontal connector for recessed drywall mud flange track with linear connector and flexible electrical connector.

**503041-09R** - L shape vertical connector for recessed drywall mud flange track.

**503041-10R** - L Shape outer connector for recessed drywall mud flange track.

**503041-11** - Track rail cover 1000mm.

**503041-12R** - T-Shape connector for recessed drywall mud flange track with linear connector and flexible electrical connector.

**503041-13R** - X shape connector for recessed drywall mud flange track.

**503041-16** - 2 Nos. of Screw & Wall Plug kit.

