

Type:_____ Qty:_____

Project:_____




HELIUM LYTE

INSPIRA 2




Round Trim



Square Trim



Round Trimless



Square Trimless

Design Features:

- Inspira 2D fixed 2" Downlight offers specification-grade performance and features, in a completely modular & field-configurable system. Every light engine integrates with any of the trims, and every trim works with all of the ceiling application and housing options.
- Made with high powered BRIDGELUX led chip that maintains high lumens per watt with 90 +CRI / Fixture comes with both Single CCT and Dim To Warm options.
- Available in both TRIAC and 0-10V dimming.
- Standard remodel installation, new construction housing available.
- LED modules and drivers are easily replaceable.
- Modules are IC Rated available in wattage up to 14W without additional IC box.
- Extruded aluminium heat sink ensures optimal heat dissipation and LED life.
- 5 Year warranty.



Warranty



Damp Rated



TRIAC



Dimming



Intertek

INSPIRA 2

Specs Code:

FIXTURE ID 1	TRIM OPTION 2	TRIM FINISH 3	LUMENS/ WATT 4	CRI / LED OPTION 5
Inspira 2- Single Colour INS2DSC	Round Trim RD Round Trimless RDTRL Square Trim SQ	White WH Black BK Custom Colour CC	L700 / 09W L07/09W L1200 / 14W L12/14W	90 CRI / 2700K 927 90 CRI / 3000K 930 90 CRI / 3500K 935 90 CRI / 4000K 940 90 CRI / 5000K 950 90 CRI / 5CCT* 90/5CCT
Inspira 2- Multi Colour INS2DMC	Square Trimless SQTRL			
BEAM ANGLE 6	DIMMING 7	VOLTAGE 8		
15 Degree 15D 24 Degree 24D 36 Degree 36D 60 Degree 60D	TRIAC TRIAC 0-10V DMV	120V 120V 120-277V UNV		

*5CCT and DTW options are exclusively available with the INS2DMC Multi-Colour model.

Order Guide:

1	2	3	4	5	6
7	8				

*Example : INS2DMC-RD-BK-L07/09-930-60D-TRIAC-UNV

Accessories :



	For Round [503046]	For Square [503047]
New Construction Plate		



INSPIRA 2



Product Details:

Round Bevel Trim Fixed - 9W

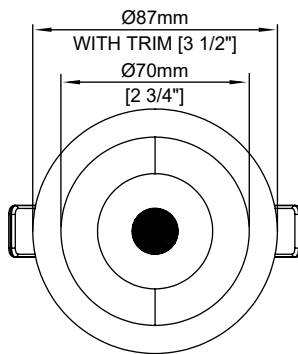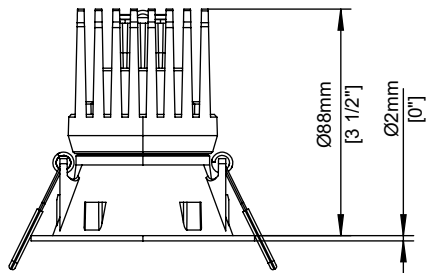

 CUT-OUT : [Ø 2 3/4"] Ø70mm

Round Bevel Trimless Fixed - 9W

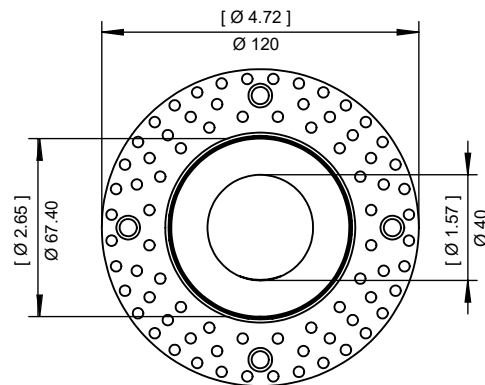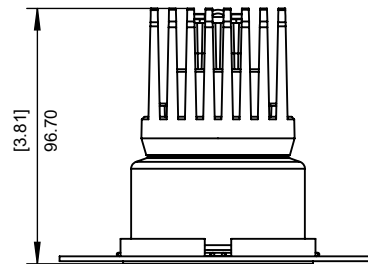

 CUT-OUT : [Ø 2 3/4"] Ø70mm

*All Dimensions are millimeters (Inches) unless otherwise indicated.



Warranty



Damp Rated



TRIAC



Dimming






Intertek




INSPIRA 2

Product Details:

Round Bevel Trim Fixed - 14W

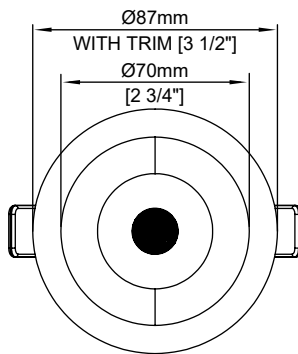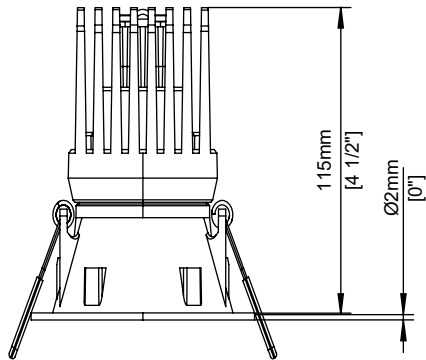

Round Bevel Trimless Fixed - 14W

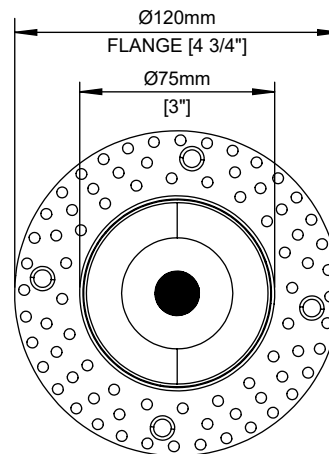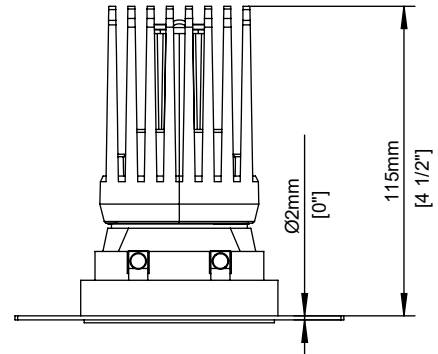

*All Dimensions are millimeters (Inches) unless otherwise indicated.



Warranty



Damp Rated



TRIAC



Dimming





Intertek

INSPIRA 2



Product Details:

Square Bevel Trim Fixed - 9W

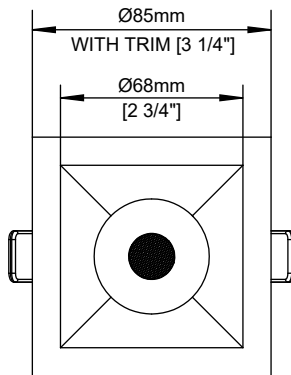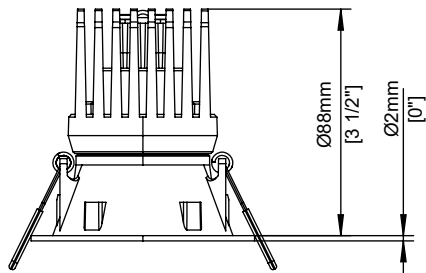

 CUT-OUT : [2 3/4"] Ø68mm X [2 3/4"] Ø68mm

Square Bevel Trimless Fixed - 9W

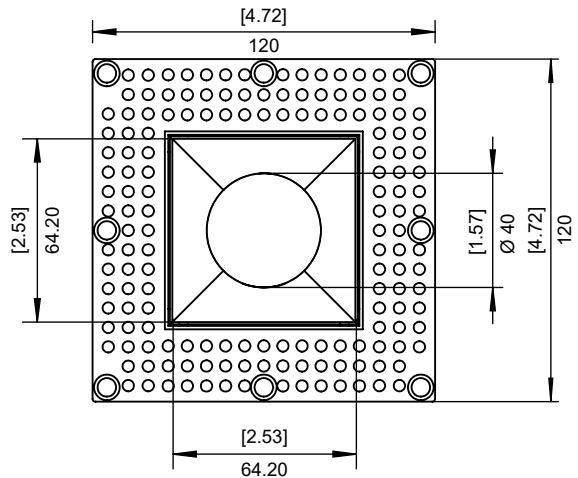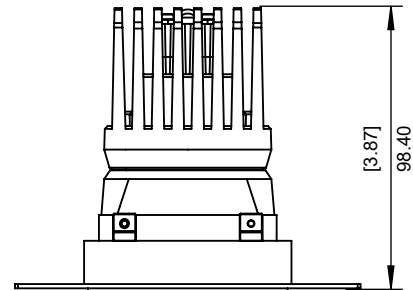

 CUT-OUT : [2 3/4"] Ø68mm X [2 3/4"] Ø68mm

*All Dimensions are millimeters (Inches) unless otherwise indicated.

5
Year
Warranty

IP44
Damp Rated

TRIAC


0-10V
Dimming

ETL
Intertek




INSPIRA 2

Product Details:

Square Bevel Trim Fixed - 14W

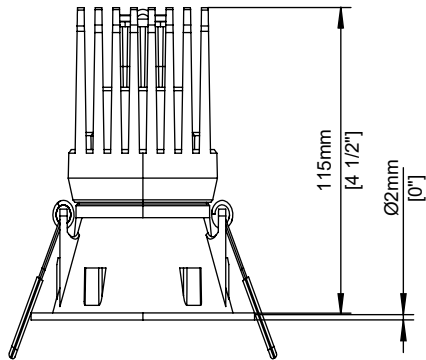

Square Bevel Trimless Fixed - 14W

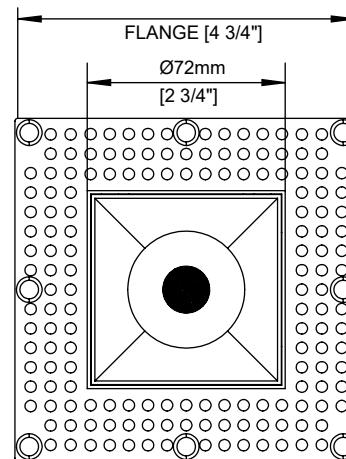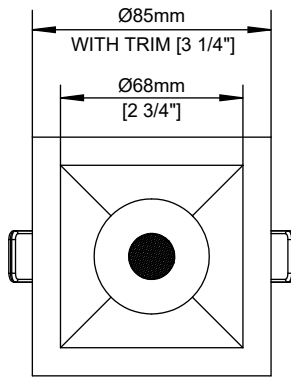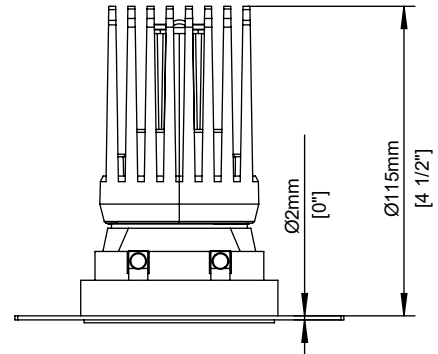

 CUT-OUT : [2 3/4"] Ø68mm X [2 3/4"] Ø68mm

 CUT-OUT : [2 3/4"] Ø68mm X [2 3/4"] Ø68mm

*All Dimensions are millimeters (Inches) unless otherwise indicated.



Warranty



Damp Rated



TRIAC



Dimming





Intertek

INSPIRA 2

Product Details:

New construction housing plate for Round Downlight

Part number - 503046


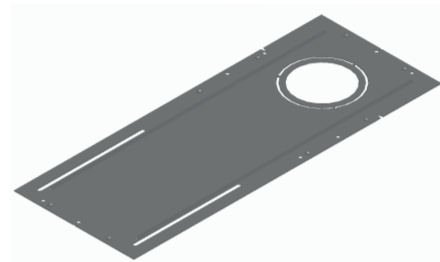
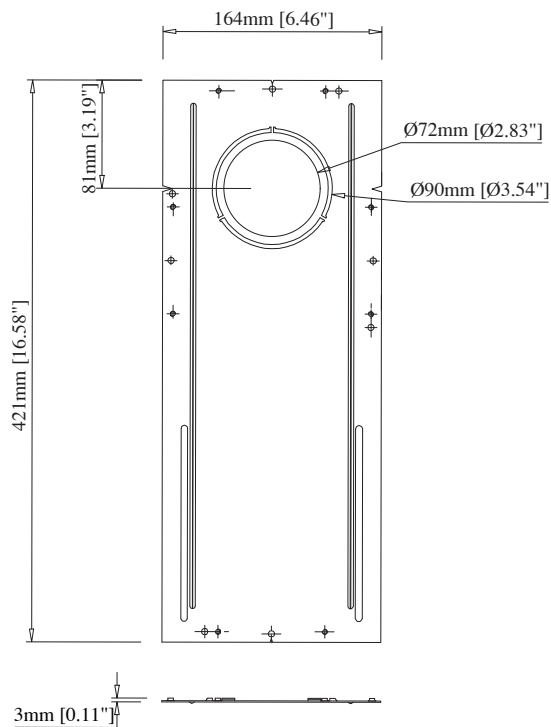


INSPIRA 2

Product Details:

New construction housing plate for Square Downlight



Part number - 503047

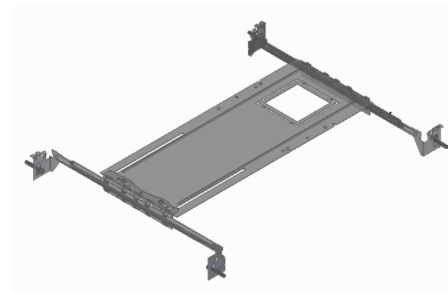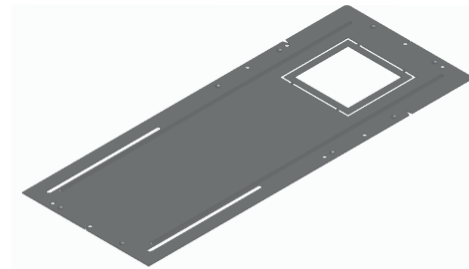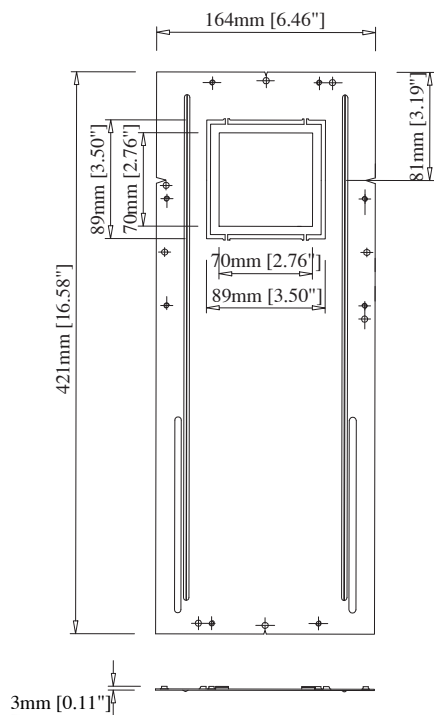



INSPIRA 2

Photometric:

Round Fixed -09W-36D

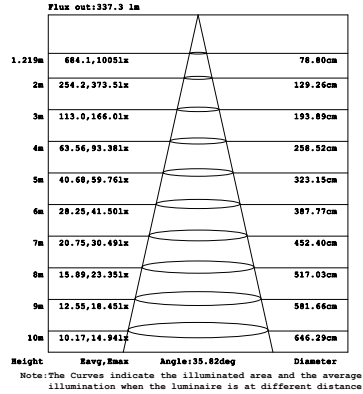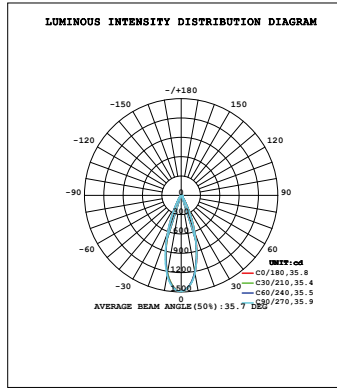

Round Fixed -14W-36D

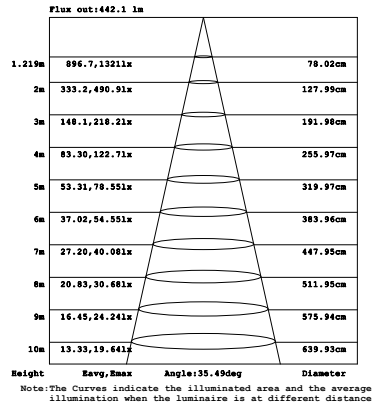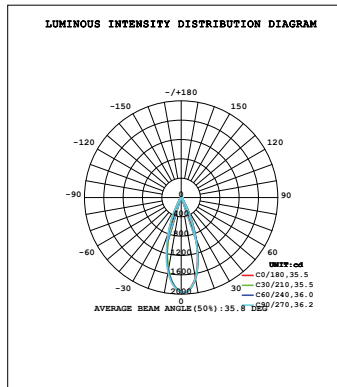

Lighting Chart:

WATT	LUMENS	CCT	CRI
09W	700 lm	3000K	CRI90
14W	1200 lm	3000K	CRI90



INSPIRA 2

Technical Details:

Material	Aluminium
Trim Options	Trim / Trimless
Trim Style	Fixed
Trim Finish	White / Black / Custom
Lumens	Upto 1200lm
Wattage	09W / 14W
Efficacy	80 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K / 5000K
	5CCT
Beam Angle	15° / 24° / 36° / 60°
Dimming	TRIAC / 0-10V
Voltage	120V / 120-277V
Life expectancy	LM 80 > 66,000 Hrs. / LM 70 > 66,000 Hrs.
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Housing	Non IC Rated / IC Rated / Remodel
Certification	ETL LISTED / DAMP RATED

