


Type:_____ Qty:_____

Project:_____



HELIUM LYTE

INSPIRA MULTI

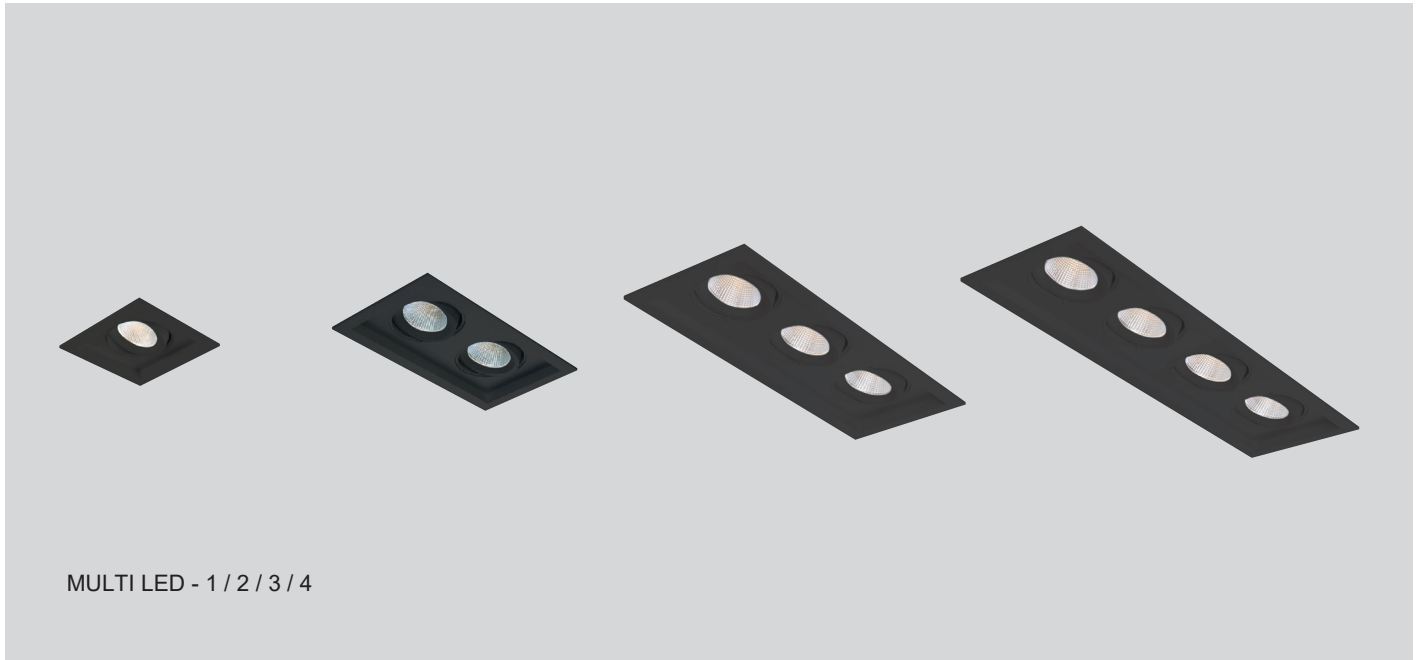

Design Features:

- Made with high powered BRIDGELUX led chip that maintains high lumens per watt with 90 +CRI / Fixture comes with both Single CCT and Dim To Warm options.
- The gimbal led heads can rotate 360 degree horizontally and tilt 30 degree.
- Integral thermal protection provided on Non-IC models to indicate improper installations.
- Available in both TRIAC and 0-10V dimming.
- LED modules and drivers are easily replaceable.
- Standard remodel installation, new construction housing available.
- Modules are IC Rated available in wattage up to 14W without additional IC box.
- Extruded aluminium heat sink ensures optimal heat dissipation and LED life.
- 5 Year warranty.



Warranty



Damp Rated



TRIAC



Dimming



Intertek

INSPIRA MULTI

Specs Code:

| FIXTURE ID 1 | TRIM FINISH 2 | NO. OF LIGHTS / LUMENS / WATT 3 | | CRI / LED OPTION 4 |
|--|-------------------------|--|------------------|------------------------------|
| Inspira INSMULTI-MC Multi -Multi Colour | White WH | 1 Light - L700 / 10W | 1L-L07/10 | 90 CRI / 5CCT 90/5CCT |
| | Black BK | 2 Light - L1400 / 20W | 2L-L14/20 | |
| | Chrome CH | 3 Light - L2100 / 30W | 3L-L21/30 | |
| | Custom Colour CC | 4 Light - L2800 / 40W | 3L-L28/40 | |
| BEAM ANGLE 5 | DIMMING 6 | VOLTAGE 7 | | |
| 15 Degree 15D | TRIAC TRIAC | 120V 120V | | |
| 24 Degree 24D | 0-10V DMV | 120-277V UNV | | |
| 36 Degree 36D | | | | |

Order Guide:

1

2

3

4

5

6

7

*Example : INSMULTI-MC-BK--1L-L07/10W-90/5CCT-36D-TRIAC-UNV




Accessories :

| | |
|-------------------------------|---------------------------------|
| | For Multi Light [503048] |
| New Construction Plate | |

INSPIRA MULTI




Product Details:

MULTI LED - 1 Light



CUT-OUT : 3-3/4" × 3-7/8" (95mm × 98mm)

MULTI LED - 2 Light

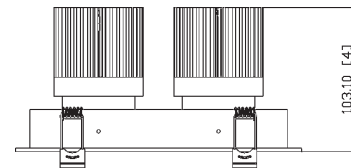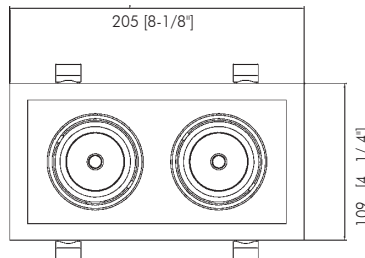

CUT-OUT : 3-7/8" × 7-1/2" (98mm × 190mm)

*All Dimensions are millimeters (Inches) unless otherwise indicated.



Warranty



Damp Rated



TRIAC



Dimming






Intertek

INSPIRA MULTI




Product Details:

MULTI LED - 3 Light

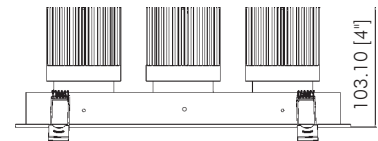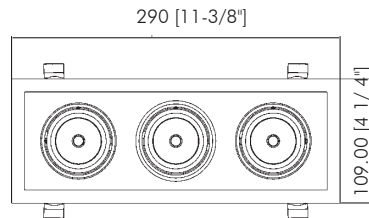

CUT-OUT : 3-7/8" × 10-13/16" (98mm × 275mm)

MULTI LED - 4 Light

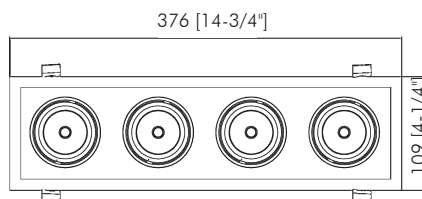

CUT-OUT : 3-7/8" × 14-1/4" (98mm × 361 mm)

*All Dimensions are millimeters (Inches) unless otherwise indicated.



Warranty



Damp Rated



TRIAC



Dimming






Intertek

INSPIRA MULTI

Product Details:

New construction housing plate for Multi Downlight

Part number - 503048

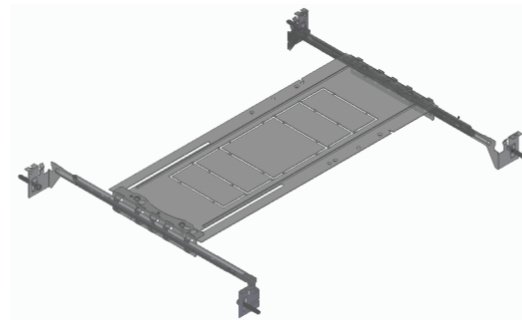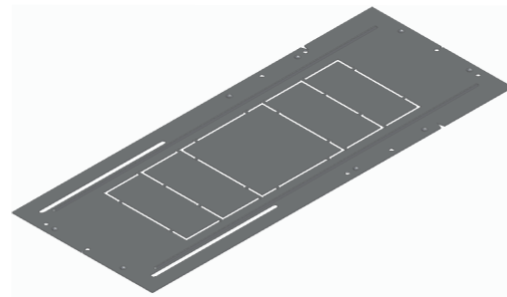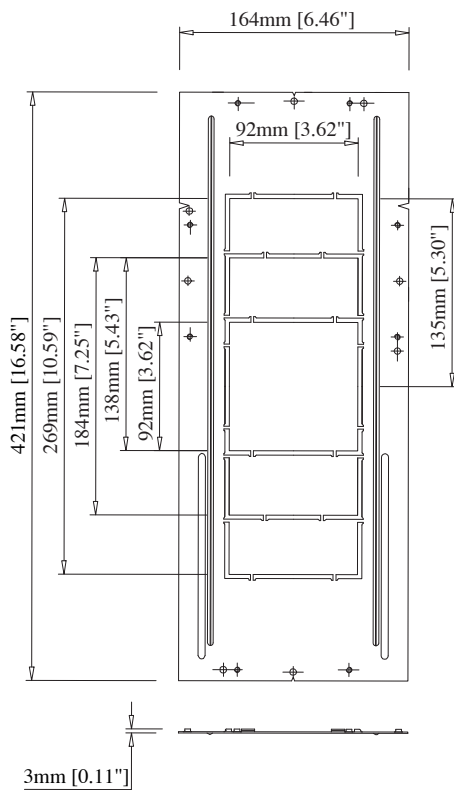

Warranty



Damp Rated



Dimming



Dimming




Intertek

INSPIRA MULTI

Photometric:

Round -10W-36D

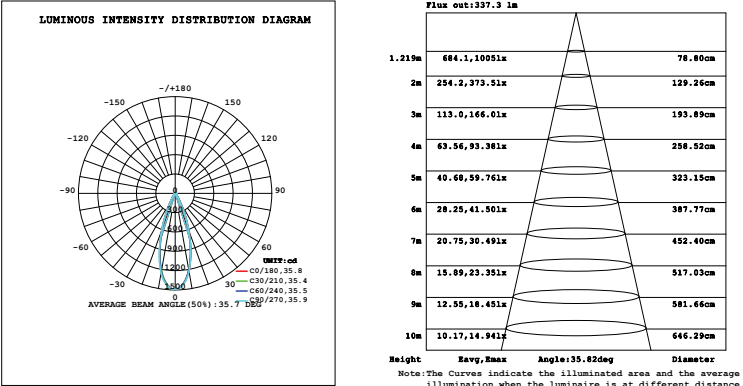

Lighting Chart:

| WATT | LUMENS | CCT | CRI |
|------|---------|-------|-------|
| 10W | 700 lm | 3000K | CRI90 |
| 20W | 1400 lm | 3000K | CRI90 |
| 30W | 2100 lm | 3000K | CRI90 |
| 40W | 2800 lm | 3000K | CRI90 |



INSPIRA MULTI

Technical Details:

| | |
|----------------------|---|
| Material | Aluminium |
| Trim Options | Trim |
| Trim Style | Fixed |
| Trim Finish | White / Black |
| Lumens | Upto 2800lm |
| No.of Light -Wattage | 1L-10W / 2L-20W / 3L-30W / 4L-40W |
| Efficacy | 70 Lm/W |
| UGR | <19 |
| CRI | 90+ |
| CCT | (2700K / 3000K / 3500K / 4000K / 5000K) |
| | 5CCT |
| Beam Angle | 15° / 24° / 36° |
| Dimming | TRIAC / 0-10V |
| Voltage | 120V / 120-277V |
| Life expectancy | LM 80 > 66,000 Hrs. / LM 70 > 66,000 Hrs. |
| Operating Temp. | -20°C ~ 40°C (-4°F ~ 104°F) |
| Housing | Non IC Rated / IC Rated / Remodel |
| Certification | ETL LISTED / DAMP RATED |

