

Type:\_\_\_\_\_ Qty:\_\_\_\_\_

Project:\_\_\_\_\_




HELIUM LYTE


# ORBIT 10



-FINISH OPTION



ORBIT10S



ORBIT10H

## Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSARAM led chip that maintains high lumens per watt.
- Available with 30° beam angle.
- Specifiable color temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.



Warranty



Dimming



DALI



Intertek

# ORBIT 10



\*Ref. Image

## Specs Code:

| FIXTURE ID <span>1</span>                                                    | LUMENS / WATT <span>2</span>          | LED OPTION <span>3</span>                                                    | DIMMING <span>4</span>               | BEAM ANGLE <span>5</span> |
|------------------------------------------------------------------------------|---------------------------------------|------------------------------------------------------------------------------|--------------------------------------|---------------------------|
| <b>ORBIT10S</b><br>-For Slim Track<br><br><b>ORBIT10H</b><br>-For High Track | <b>L900/10W</b><br><br><b>L90/10W</b> | 2700K <b>27K</b><br>3000K <b>30K</b><br>3500K <b>35K</b><br>4000K <b>40K</b> | 0-10V <b>DMV</b><br>DALI <b>DALI</b> | 30 Degree <b>30D</b>      |
| FINISH <span>6</span>                                                        | ACCESSORIES <span>7</span>            |                                                                              |                                      |                           |
| White <b>WH</b><br>Black <b>BLK</b><br>Gold <b>GLD</b>                       | Not Applicable <b>NA</b>              |                                                                              |                                      |                           |

## Ordering Code:

1 2 3 4 5 6


7

\*Example : ORBIT10H-L90/10W-30K-DMV-30D-BLK-NA



# ORBIT 10

## Mounting Details:

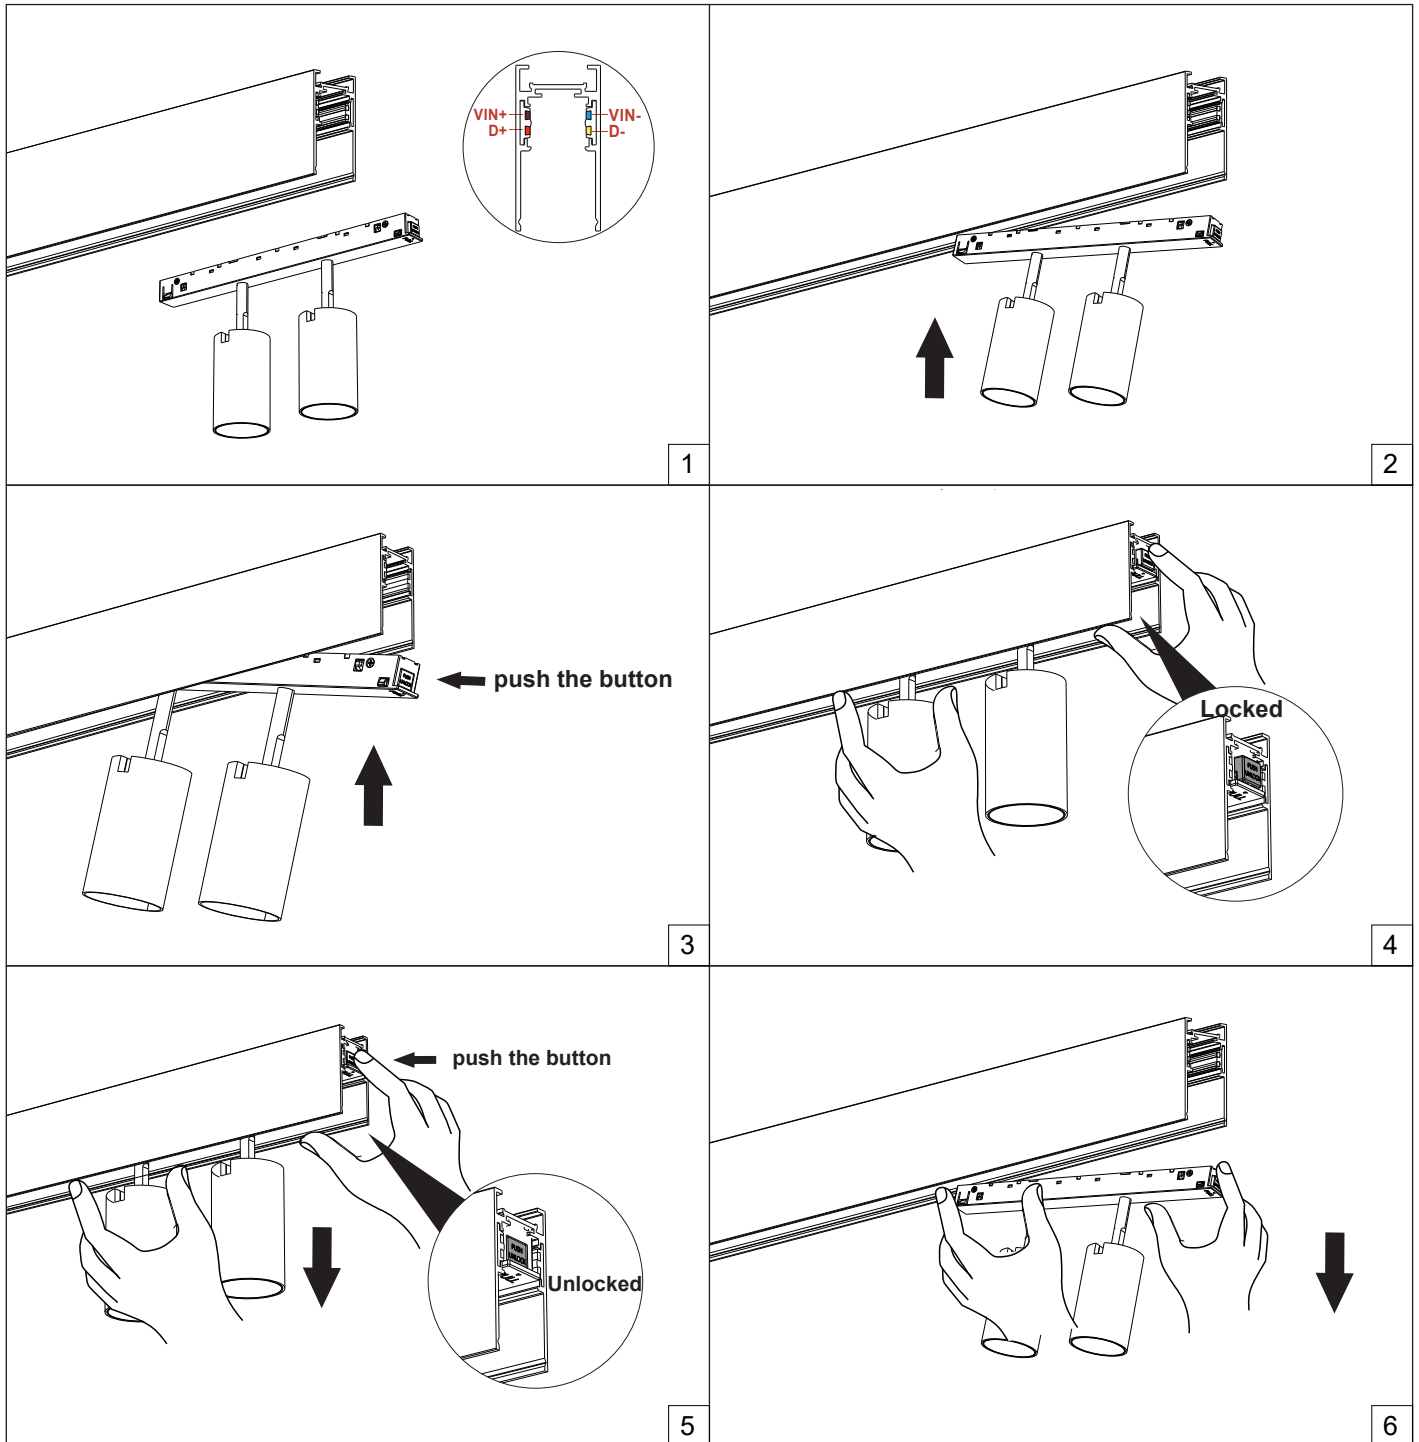



# ORBIT 10

Photometric:

Lighting Chart:

| WATT | LUMENS | CCT   | CRI   |
|------|--------|-------|-------|
| 10W  | 900 lm | 3000K | CRI90 |



Warranty



Dimming



DALI



Intertek

# ORBIT 10

## Technical Details:

|                 |                               |
|-----------------|-------------------------------|
| Material        | Extruded Aluminium            |
| Head Style      | Fixed                         |
| Finish          | White / Black / Gold          |
| Lumens          | Upto 900lm                    |
| Wattage         | 10W                           |
| Efficacy        | 90 Lm/W                       |
| UGR             | <19                           |
| CRI             | 90+                           |
| CCT             | 2700K / 3000K / 3500K / 4000K |
| Beam Angle      | 30°                           |
| Dimming         | DALI / 0-10V                  |
| Operating Temp. | -20°C ~ 40°C (-4°F ~ 104°F)   |
| Voltage         | 120V / 120-277V               |
| Housing         | Non IC Rated / IC Rated       |
| Certification   | ETL LISTED / DRY RATED        |

