

Type:_____ Qty:_____

Project:_____




HELIUM LYTE


CUBIC 10



-FINISH OPTION



CUBIC10S



CUBIC10H

Design Features:

- Easily repositioned on site.
- Premium aluminium housing.
- Made with high powered OSARAM led chip that maintains high lumens per watt.
- Available with 30° beam angle.
- Specifiable color temperature.
- CRI > 90
- 0-10V and DALI Dimming option available.
- 5 Year warranty.



Warranty



Dimming



DALI



Intertek

CUBIC 10



*Ref. Image

Specs Code:

FIXTURE ID 1	LUMENS / WATT 2	LED OPTION 3	DIMMING 4	BEAM ANGLE 5
CUBIC10S -For Slim Track CUBIC10H -For High Track	L1000/10W L100/10W	2700K 27K 3000K 30K 3500K 35K 4000K 40K	0-10V DMV DALI DALI	30 Degree 30D
FINISH 6	ACCESSORIES 7			
White WH Black BLK Gold GLD	Not Applicable NA			

Ordering Code:

1
2
3
4
5
6


7

*Example : CUBIC10S-L100/10W-30K-DMV-30D-BLK-NA



CUBIC 10

Mounting Details:

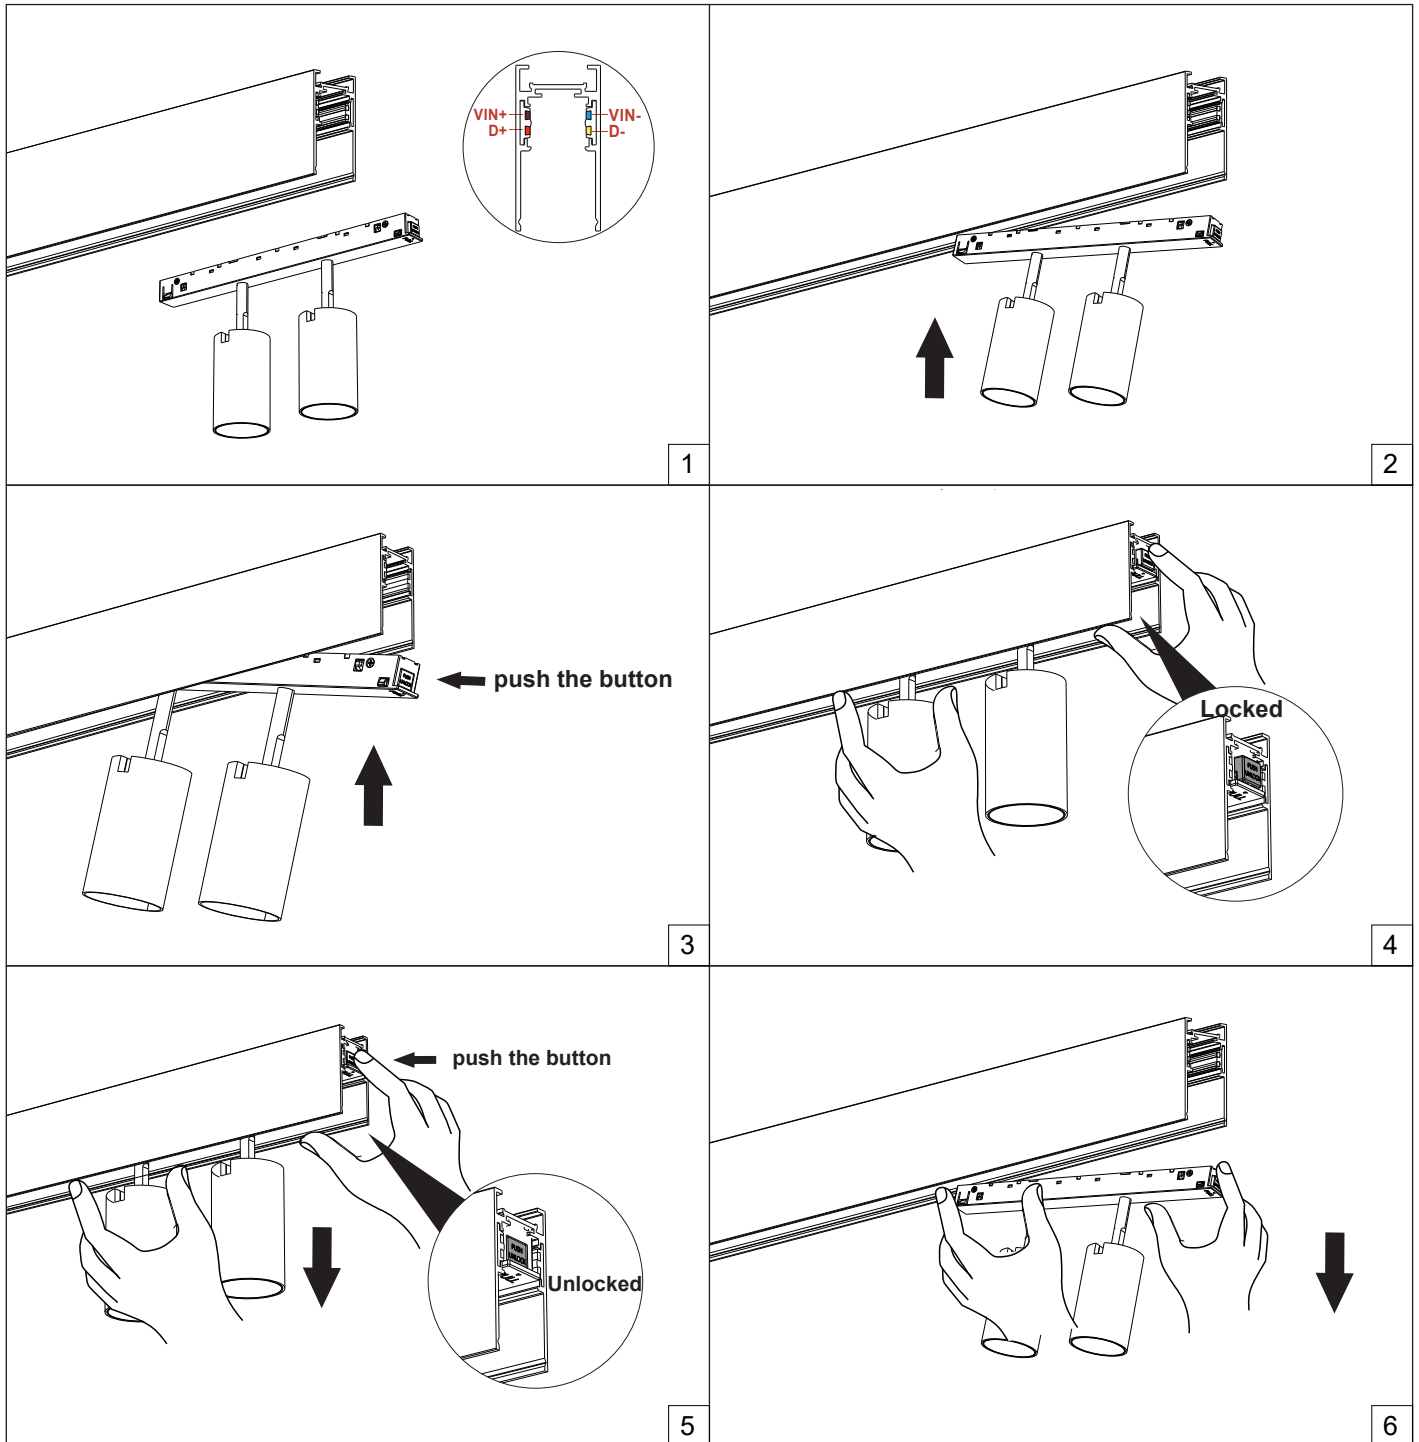



CUBIC 10

Photometric:

Lighting Chart:

WATT	LUMENS	CCT	CRI
10W	1000 lm	3000K	CRI90



Warranty



Dimming



DALI



Intertek



CUBIC 10

Technical Details:

Material	Extruded Aluminium
Head Style	Fixed
Finish	White / Black / Gold
Lumens	Upto 1000lm
Wattage	10W
Efficacy	100 Lm/W
UGR	<19
CRI	90+
CCT	2700K / 3000K / 3500K / 4000K
Beam Angle	30°
Dimming	DALI / 0-10V
Operating Temp.	-20°C ~ 40°C (-4°F ~ 104°F)
Voltage	120V / 120-277V
Housing	Non IC Rated / IC Rated
Certification	ETL LISTED / DRY RATED



Warranty



Dimming



DALI



Intertek